## Thermofit Molded Parts Specification Control Drawing

NOTES

1. All dimensions are in

(millimeters)


2. Dimensions appearing in table are as follows:

a - As Supplied

b - After Unrestricted Recovery

3. Coating is optional. As supplied dimensions appearing in table are for uncoated parts. When coating is added, entry diameters will be reduced by .06 Max.

### LIMITED DISTIBUTION



Part Number: 214W252

Description: Boot, Connector

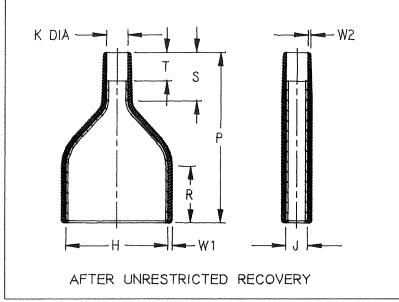


TABLE OF DIM PART NUMBER	Н		J		К		Р	R	S	Т	W 1	W2
	MIn a	Max b	Min a	Max b	MIn a	Max b	±10% b	±10%	±10% b	±10%	±20% b	±20% b
214W252-3	1.57 [40,0]	1.42 [36,0]	.47 [12,0]	.30 [7,5]	.71 [18,0]	.30 [7,5]	<u>2.36</u> [60,0]	.79 [20, 0]	.67 [17,0]	<u>.39</u> [10,0]	.06 [1,5]	.04 [1,0]



RAYCHEM CORPORATION 300 CONSTITUTION DRIVE MENLO PARK, CALIFORNIA 94025 (415) 361-6055 Revision : ISSUED Date : 11/16/89

Part Number : 214W252

Description : Boot, Connector

# Thermofit Molded Parts Specification Control Drawing

Part Number: 214W252

Description: Boot, Connector

### LIMITED DISTRIBUTION

Y CHART				
MATERIAL DESCRIPTION	RT SPEC	COATING SLASH NO.	COATING S NO.	COATING DESCRIPTION
Polyolefin, semi-rigid	RT-301	/42	S-1017	Adhesive
			<u> </u>	
	MATERIAL DESCRIPTION	MATERIAL DESCRIPTION RT SPEC	MATERIAL DESCRIPTION RT SPEC COATING SLASH NO.	MATERIAL DESCRIPTION RT SPEC COATING SLASH NO. COATING S NO.

ORDERING INFORMATION	
	214W252 -3 /42
Base part number	
Material dash number (See Compatability Chart)	
Adhesive slash number (If necessary, see Compatability	Chart)

THIS DRAWING IS SUBJECT TO CHANGE WITHOUT NOTICE; CONSULT YOUR NEAREST FIELD REPRESENTATIVE FOR CURRENT REVISION



RAYCHEM CORPORATION 300 CONSTITUTION DRIVE MENLO PARK, CALIFORNIA 94025 (415) 361-6055

Revision : ISSUED

Part Number: 214W252

Date: 11/16/89

Description: Boot, Connector

If this document is printed it becomes uncontrolled. Check for the latest revision.

### 单击下面可查看定价,库存,交付和生命周期等信息

## >>TE Connectivity(泰科)