

4

3

2



1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION AUG 2008
 © COPYRIGHT 2009 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.


LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DRN	APPD
C6		REVISED (ECR-15-013726)	1MAR2016	A.X	H.W

OBSOLETE

7-1734038-1
6-1734038-1
5-1734038-1
4-1734038-2
3-1734038-3
3-1734038-2
3-1734038-1
2-1734038-1
1-1734038-2
1-1734038-1
1734038-3
1734038-2
1734038-1
PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DRN F. YANG 31.JUL.2009	 TE Connectivity																								
DIMENSIONS: MM		CHK S. CHIEN 31.JUL.2009																									
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APRD W. KODAMA 31.JUL.2009	NAME																								
<table border="1"> <tr><td>0</td><td>PLC</td><td>±</td><td>-</td></tr> <tr><td>1</td><td>PLC</td><td>±</td><td>0.3</td></tr> <tr><td>2</td><td>PLC</td><td>±</td><td>0.2</td></tr> <tr><td>3</td><td>PLC</td><td>±</td><td>0.15</td></tr> <tr><td>4</td><td>PLC</td><td>±</td><td>0.1</td></tr> <tr><td colspan="2">FINISH</td><td>±</td><td>0.3</td></tr> </table>		0	PLC	±	-	1	PLC	±	0.3	2	PLC	±	0.2	3	PLC	±	0.15	4	PLC	±	0.1	FINISH		±	0.3	PRODUCT SPEC 108-57549	
0	PLC	±	-																								
1	PLC	±	0.3																								
2	PLC	±	0.2																								
3	PLC	±	0.15																								
4	PLC	±	0.1																								
FINISH		±	0.3																								
MATERIAL		APPLICATION SPEC		SIZE																							
		WEIGHT 1 82 GRAMS		A300779 C=1734038																							
		ER DRAWING		RESTRICTED TO																							
		SCALE		SHEET 1 OF 4																							
				REV C6																							

TE LOGO & DATE CODE






NOTES:


1. MATERIAL: HOUSING: (SEE TABLE) WITH 30% GF, UL 94V-0. BLACK COLOR. CONTACT: PHOSPHOR BRONZE. SHELL: BRASS.
2. FINISH: CONTACT: 0.762µm [30µ"] MIN. GOLD PLATING ON CONTACT AREA. 3.048µm [120µ"] MIN. MATTE TIN PLATING ON SOLDER TAIL, WITH ENTIRE CONTACT UNDERPLATED 1.270µm [50µ"] MIN. NICKEL. SHELL: 0.762µm [30µ"] MIN. NICKEL PLATING OVER 0.762µm [30µ"] MIN. Cu UNDERPLATED.
3. REFLOW SOLDER CAPABLE TO 260°C PER TE SPEC 109-201, CONDITION B.

NO BOARD LOCK FUNCTION APPLIED.


LOW HALOGEN SPECIFICATION:
CHLORINE(Cl): 900ppm MAX.
BROMINE(Br): 900ppm MAX.



LOC	DIST	REV	DESCRIPTION	DATE	DM	APVD
DW			SEE SHEET 1.			

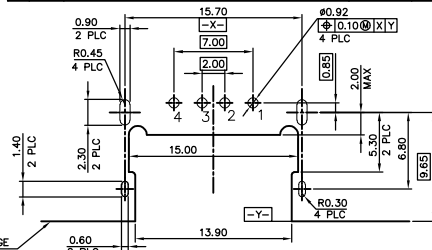

RECOMMEND P.C.B LAYOUT (THICKNESS 1.2~1.4mm)
(COMPONENT SIDE) TOLERANCE±0.05

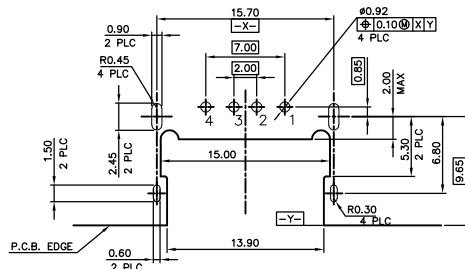

RECOMMEND P.C.B LAYOUT (THICKNESS=1.0~1.4mm) ▲
(COMPONENT SIDE) TOLERANCE±0.05

TAPE & REEL	2.40	2.55	2.10	HTN	B-1734038-4	
	1.80	1.80	1.80	PAGT	B-1734038-4	
PACKAGING	DIM A	DIM B	DIM C	FINISH	MATERIAL	PART NUMBER
	2.40	2.55	2.10			B-1734038-4

OBSOLETE

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
MM	
0 PLC	± .3
1 PLC	± 0.3
2 PLC	± 0.2
3 PLC	± 0.15
4 PLC	± .1
ANGLES	± .3°
MATERIAL	FINISH




DM	NAME
CHK	
APVD	
PRODUCT SPEC	
APPLICATION SPEC	
WEIGHT	1.56 GRAMS
SIZE	A300779
CAGE CODE	C=1734038
DRAWING NO	
RESTRICTED	






USB CONNECTOR, RECEPTACLE, R/A, A TYPE

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION AUG 2008
 © COPYRIGHT 2009 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
#	LTR	DESCRIPTION	DATE	DNM	APVD
SEE SHEET 1.					

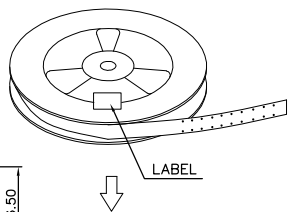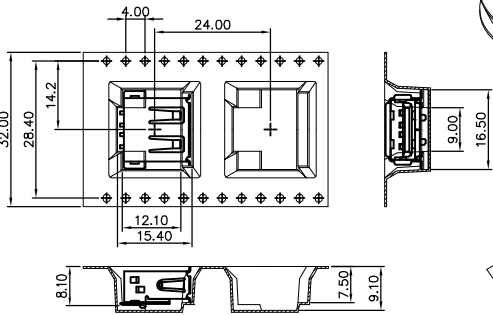

- NOTES:
 1. MATERIAL:
 REEL: PS.
 CARRIER: PS.
 COVER TAPE: PBT.
 2. DIMENSION
 REEL: #330mmX37.1mm
 SHIPPING CARTON: L=350mm,W=350mm,H=250mm
 3. QUANTITY:
 PRIMARY PACKING: 300PCS/REEL
 SECONDARY PACKING: 9REELS/CARTON(2,700PCS).
 4. WEIGHT:
 NET WEIGHT: 0.46KG/REEL, 4.15 KG/CARTON.
 GROSS WEIGHT: 0.97 KG/REEL, 9.7 KG/CARTON.
 5. PEELING RESISTANCE: 20G TO 130G.
 6. PEELING SPEED: 300MM/MIN.



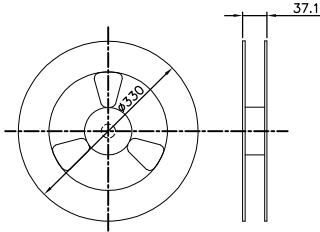
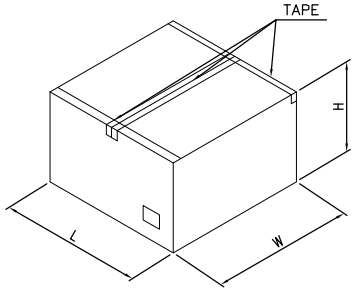
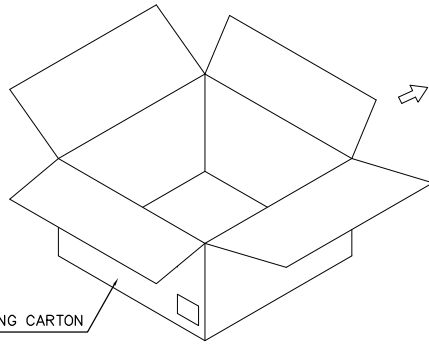


OBSOLETE 6-1734038-1
 PART NUMBER


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWM		TE Connectivity USB CONNECTOR, RECEPTACLE, R/A, A TYPE	
DIMENSIONS: MM		TOLERANCES UNLESS OTHERWISE SPECIFIED:			
0 PLC ± . 1 PLC ± . 2 PLC ± . 3 PLC ± . 4 PLC ± . 5 PLC ± . 6 PLC ± . ANGLES ± . FINISH ± .		DIM DW APVD PRODUCT SPEC APPLICATION SPEC WEIGHT		SIZE CAGE CODE DRAWING NO A300779 C=1734038	
MATERIAL		FINISH		RESTRICTED TO	

LOC	DIST	REVISIONS			
DW		REV	DATE	BY	APPROV
		SEE SHEET 1.			

PULL OUT DIRECTION →

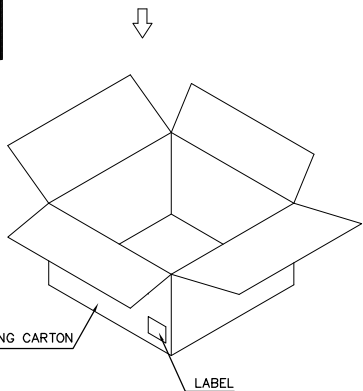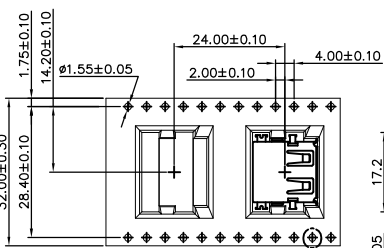

- NOTES:
 1. MATERIAL:
 REEL: PS.
 CARRIER: PS.
 COVER TAPE: PBT.
 2. DIMENSION
 REEL: Ø330mmX37.1mm
 3. PEELING RESISTANCE: 20G TO 130G.
 4. PEELING SPEED: 300MM/MIN.



OBSOLETE

TAPE & REEL	8.92 Kg	4.91 Kg	350	9	3150 PCS	8-1734038-4
PACKAGING	GROSS WEIGHT	NET WEIGHT	PCS/REEL	REELS/CARTON	QUANTITY	PART NUMBER
						8-1734038-4

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: MM		TOLERANCES UNLESS OTHERWISE SPECIFIED:	
0 PLC	±	1 PLC	±
2 PLC	±	3 PLC	±
4 SDC	±	ANGLES	±
MATERIAL		FINISH	

DWG	CHK	APVD	NAME
			STE TE Connectivity
PRODUCT SPEC	USB CONNECTOR, RECEPTACLE, R/A, A TYPE		
APPLICATION SPEC			
SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	300779	C-1734038	

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)