



a) PART AS SUPPLIED

312W021-G01

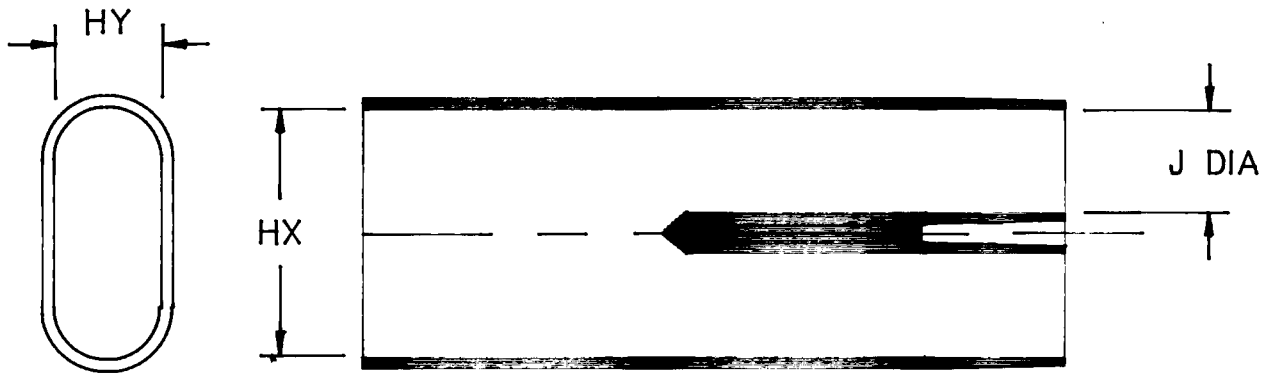

b) PART AFTER UNRESTRICTED RECOVERY

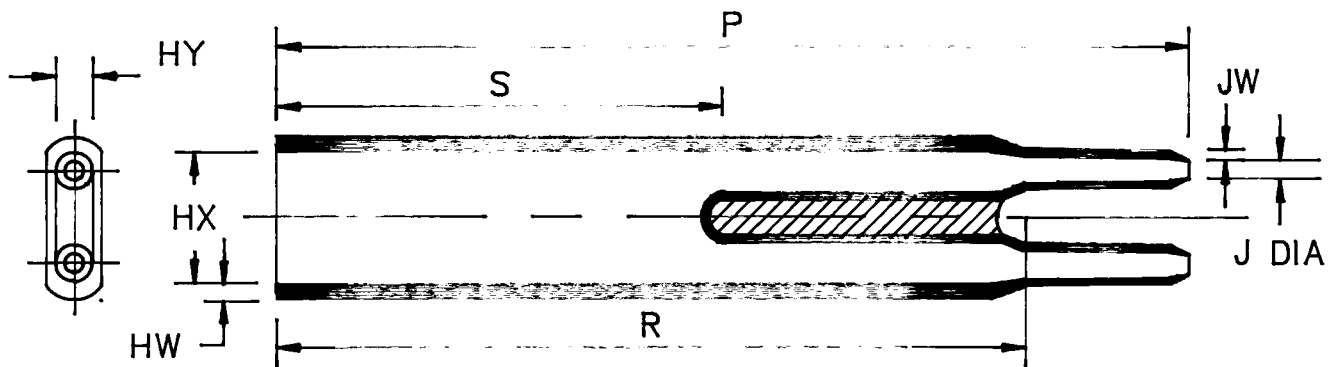

DIMENSIONS (in millimetres)

PART NUMBER	HX	HX	HY	HY	J	J	P	R	S	HW	JW
	MIN	MAX	MIN	MAX	MIN	MAX	±10%	±10%	±10%	±20%	±20%
	a	b	a	b	a	b	b	b	b	b	b
312W021 -G01	15	9,5	6	2,7	8	1,5	60	48,5	27	1,0	0,5

Drawn **A.LILLEY**

Checked *sh*

Issue **1**

Date **JAN.1988**

Approval

Design

W


MKTG

[Signature]

Q.C.


[Signature]

Conforms to ISO Recommendations
3rd Angle Projection
Not to scale



Ordering Information

202W232-*G01/**-0

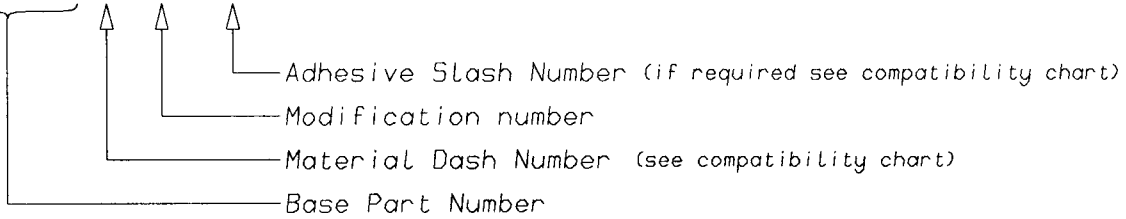

COMPATIBILITY CHART

MATERIAL DASH NUMBER	MATERIAL DESCRIPTION	COATING SLASH NUMBER
-3	POLYOLEFIN, SEMI-RIGID	/42, /86
-4	POLYOLEFIN, FLEXIBLE	/42, /86
-25	ELASTOMER, FLUID RESISTANT	/86, /225

AS SUPPLIED DIMENSIONS ARE FOR UNCOATED PARTS,
WHEN COATING IS ADDED, ENTRY DIAMETERS WILL REDUCE BY 1.5mm MAX.

Raychem
 Electronics OEM Division Europe
 Swindon, Wiltshire, England.
 Telephone: (01793) 528171 Fax: 573923

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)