

USE 1.32±0.02[.0520±.0010] DRILLED HOLE (#55 DRILL). FINISH TO BE  
TIN OVER 0.02[.001]MIN COPPER.

3 DIMENSION APPLIES AT BASE OF SHROUD.

4 THE NOTED DIMENSIONS APPLY AT THE MATING FACE OF THE HOUSING.

5 0.0038 [ .000150] TIN LEAD ON HOLD DOWN, ALL OVER 0.0013 [ .000050] NICKEL.

6. IF PLANNING TO USE MORE THAN ONE MATING PAIR OF CONNECTORS TO INTERCONNECT 2 BOARDS, PLEASE REFER TO THE SPACING PARAGRAPH IN APPLICATION SPEC, #114-7010

## 7. PACKAGED IN TUBES

8 DIMENSIONS NOTED APPLY FROM THE BASIC DIMENSION LINE (NOT THE CIRCUIT CAVITY CENTER LINE) TO THE SURFACE INDICATED.


9 0.00076[.000030] GOLD AT POINT OF MEASUREMENT, 0.00051[.000020] MIN AT THE END POINTS OF AREA G, (LOCALIZED GOLD PLATE AREA), 0.0038[.000150] TIN ON LOCALIZED TIN PLATED AREA, ALL OVER 0.0013[.000050] NICKEL.

10 USE 1.32±0.02(.0520±.0010) DRILLED HOLE (#55 DRILL) FINISH TO BE TIN OVER  
0.02(.001) MIN COPPER.


0.0038 (0.000150) TIN ON HOLDDOWN, ALL OVER 0.0013 (0.000050) NICKEL


 ROHS 2002/95/EC COMPLIANT

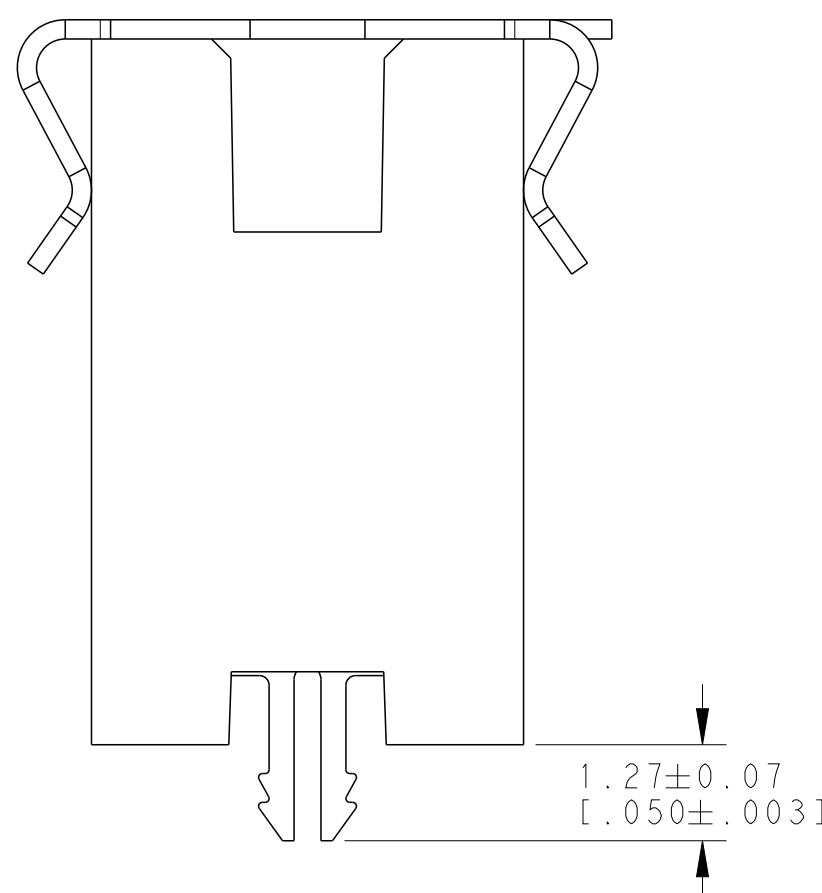


13 HOUSING: LCP, COLOR: BLACK  
POST: PHOSPHOR BRONZE  
VACCUUM COVER: ALUMINIUM  
HOLD DOWN: COPPER ALLOY

































CONTACTS NOT SHOWN






PLATED THRU HOLE 

	$\varnothing 0.15$ [ .006 ] 	M	N
	$\varnothing 0.08$ [ .003 ] 		

Ø1.65±0.02  
[.065±.001]  
PAD ON TOP SIDE  
1.65[.065] MIN. ON UNDER  
SIDE (2PLCS)

	65.33 [2.572]	66.59 [2.622]	64.05 [2.522]	49	100	 6-2267256-0
	58.98 [2.322]	60.24 [2.372]	57.70 [2.272]	44	90	 5-2267256-9
	52.63 [2.072]	53.89 [2.122]	51.35 [2.022]	39	80	 5-2267256-8
	46.28 [1.822]	47.54 [1.872]	45.00 [1.772]	34	70	 5-2267256-7
	39.93 [1.822]	41.19 [1.622]	38.65 [1.522]	29	60	 5-2267256-6
	33.58 [1.322]	34.84 [1.372]	32.30 [1.272]	24	50	 5-2267256-5
	27.23 [1.072]	28.49 [1.122]	25.95 [1.022]	19	40	 5-2267256-4
	20.88 [.822]	22.14 [.872]	19.60 [.772]	14	30	 5-2267256-3
	14.53 [.572]	15.79 [.622]	13.25 [.522]	9	20	 5-2267256-2
	8.18 [.322]	9.44 [.372]	6.90 [.272]	4	10	 5-2267256-1
	65.33 [2.572]	66.59 [2.622]	64.05 [2.522]	49	100	1-2267256-0
	58.98 [2.322]	60.24 [2.372]	57.70 [2.272]	44	90	2267256-9
	52.63 [2.072]	53.89 [2.122]	51.35 [2.022]	39	80	2267256-8
	46.28 [1.822]	47.54 [1.872]	45.00 [1.772]	34	70	2267256-7
	39.93 [1.822]	41.19 [1.622]	38.65 [1.522]	29	60	2267256-6
	33.58 [1.322]	34.84 [1.372]	32.30 [1.272]	24	50	2267256-5
	27.23 [1.072]	28.49 [1.122]	25.95 [1.022]	19	40	2267256-4
	20.88 [.822]	22.14 [.872]	19.60 [.772]	14	30	2267256-3
	14.53 [.572]	15.79 [.622]	13.25 [.522]	9	20	2267256-2
	8.18 [.322]	9.44 [.372]	6.90 [.272]	4	10	2267256-1
FINISH	D	C	B	A	NUMBER OF POSITIONS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN RAVI.S		03APR2019		 TE Connectivity	
		CHK J OLSON		03APR2019			
DIMENSIONS: mm [INCH]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME		HDR ASSY, THROUGH HOLE AMPMODU 50/50 GRID (9.90[.390] MATED HEIGHT)	
		0 PLOC ±.010 2 PLOC ±.010 2 PLOC ±0.131(.0051) 4 PLOC ±.010 4 PLOC ±.010 ANGLES ±.010 FINISH		ZPLOC J OLSON PRODUCT SPEC 108-1332 APPLICATION SPEC 114-7010			
MATERIAL		SEE TABLE		CAGE CODE		DRAWING NO	
				00779		C=2267256	
		CUSTOMER DRAWING		SCALE		SHEET 1 of 1	
				10:1		REV A	



单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)