

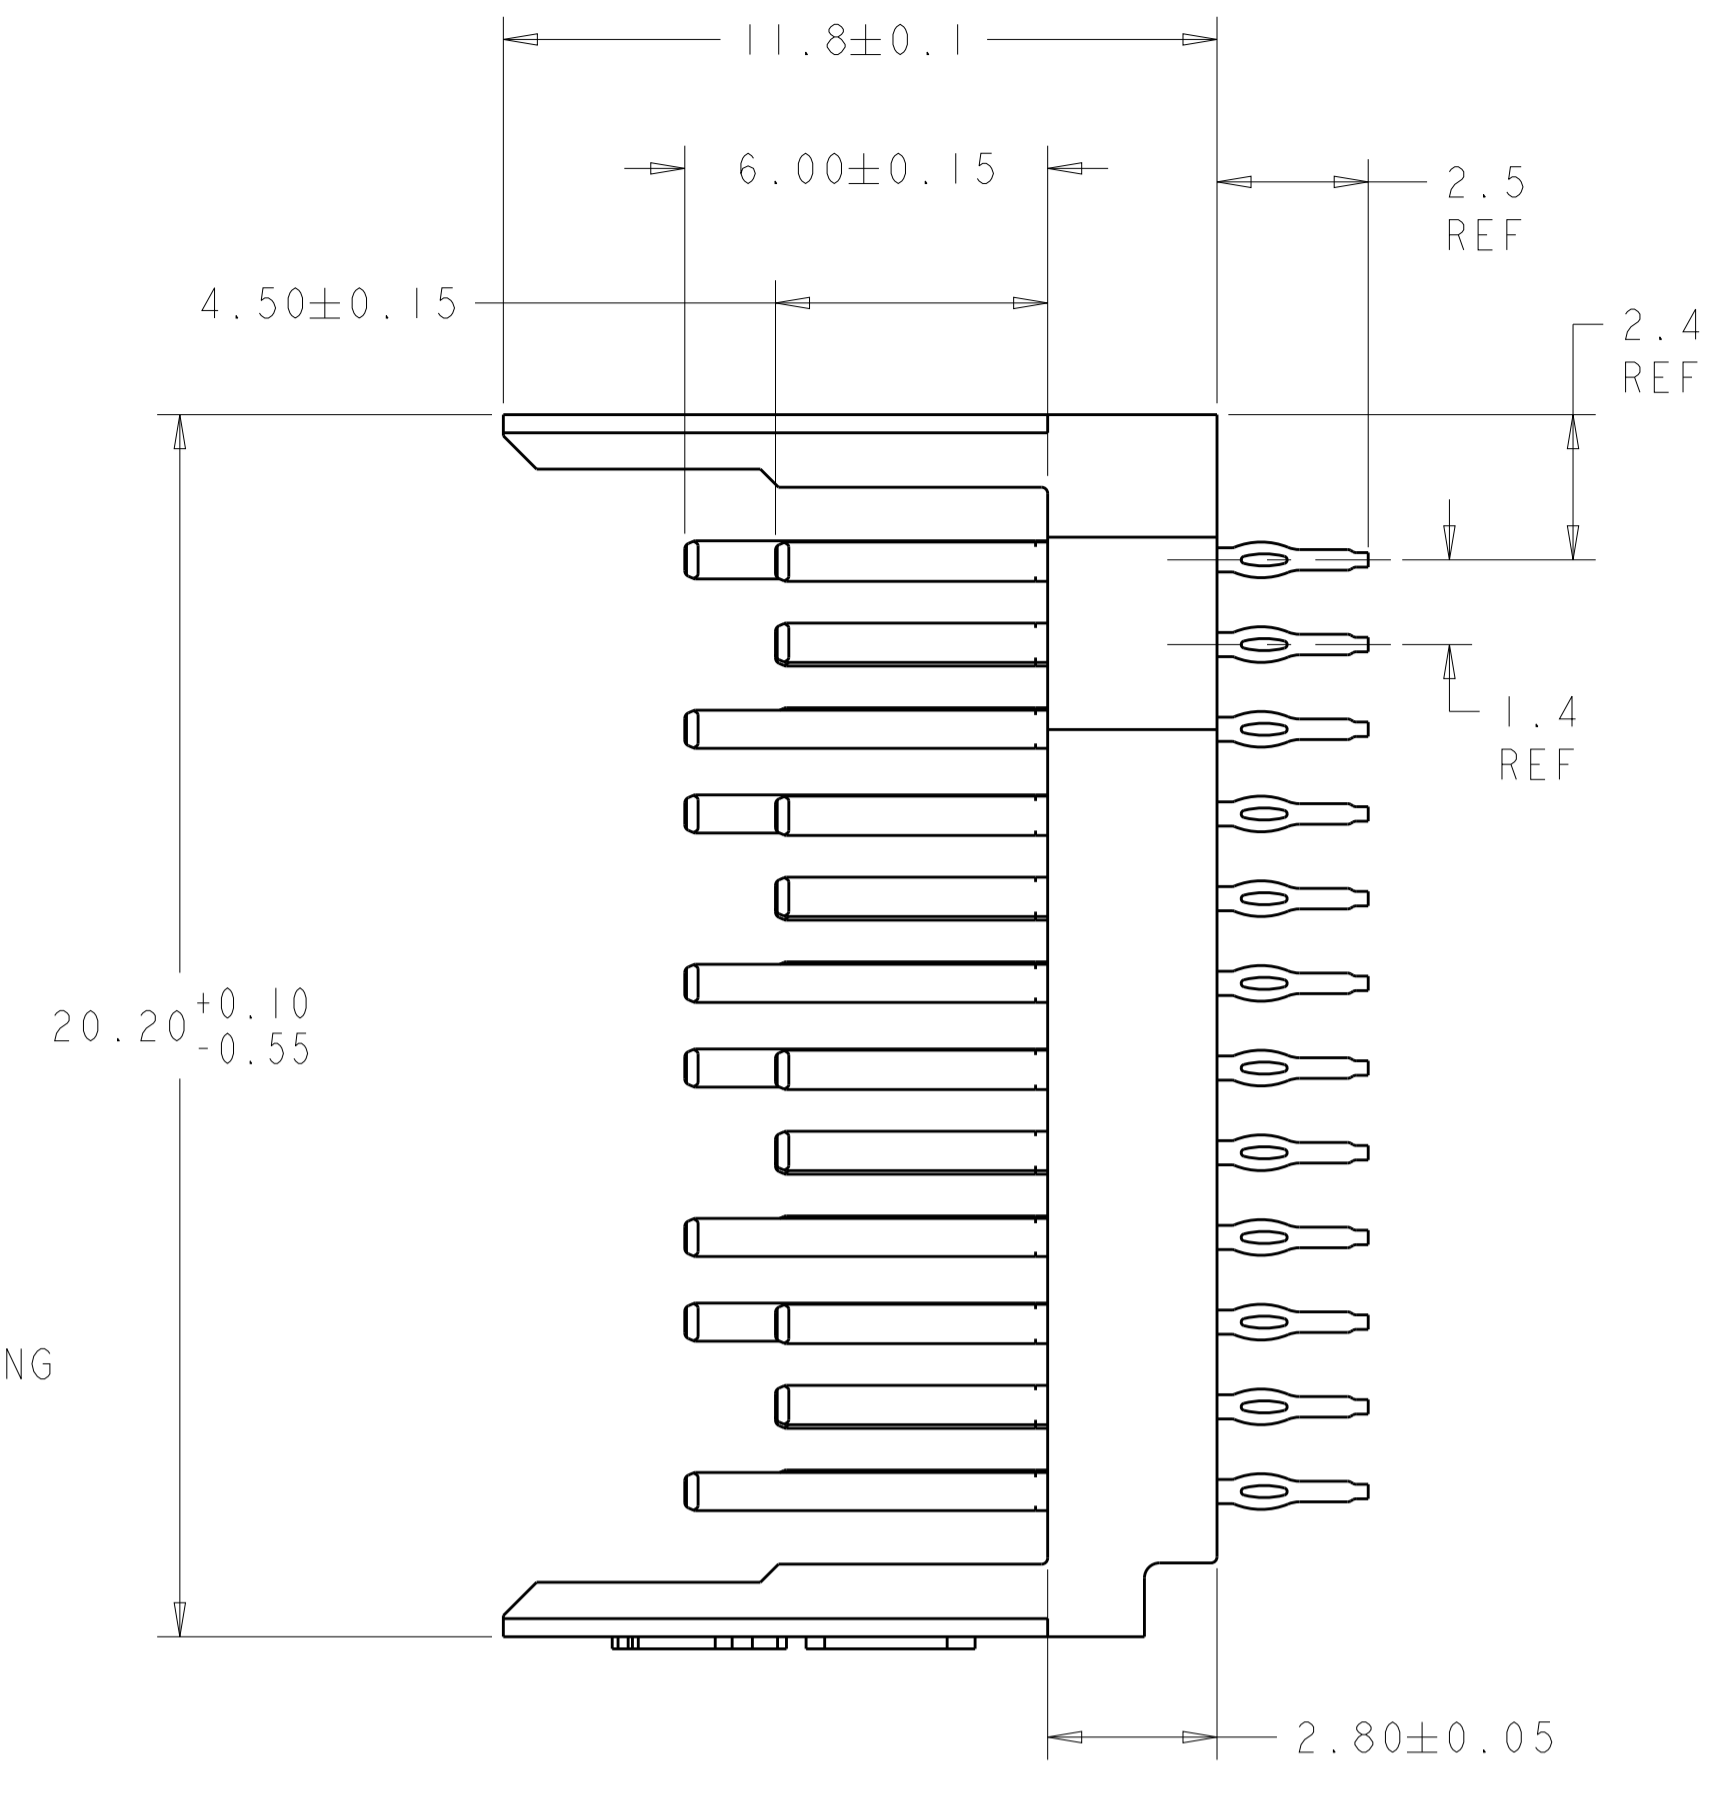



| LOC | DIST | REVISIONS | | | |
|-----|------|---------------------------|-----------|----|------|
| GP | 00 | REV | DATE | BY | APPD |
| F | | REVISED PER ECO-13-010626 | 31JUL2013 | KH | RP |
| G | | REVISED PER ECO-19-009248 | 04JUL2019 | AP | SY |

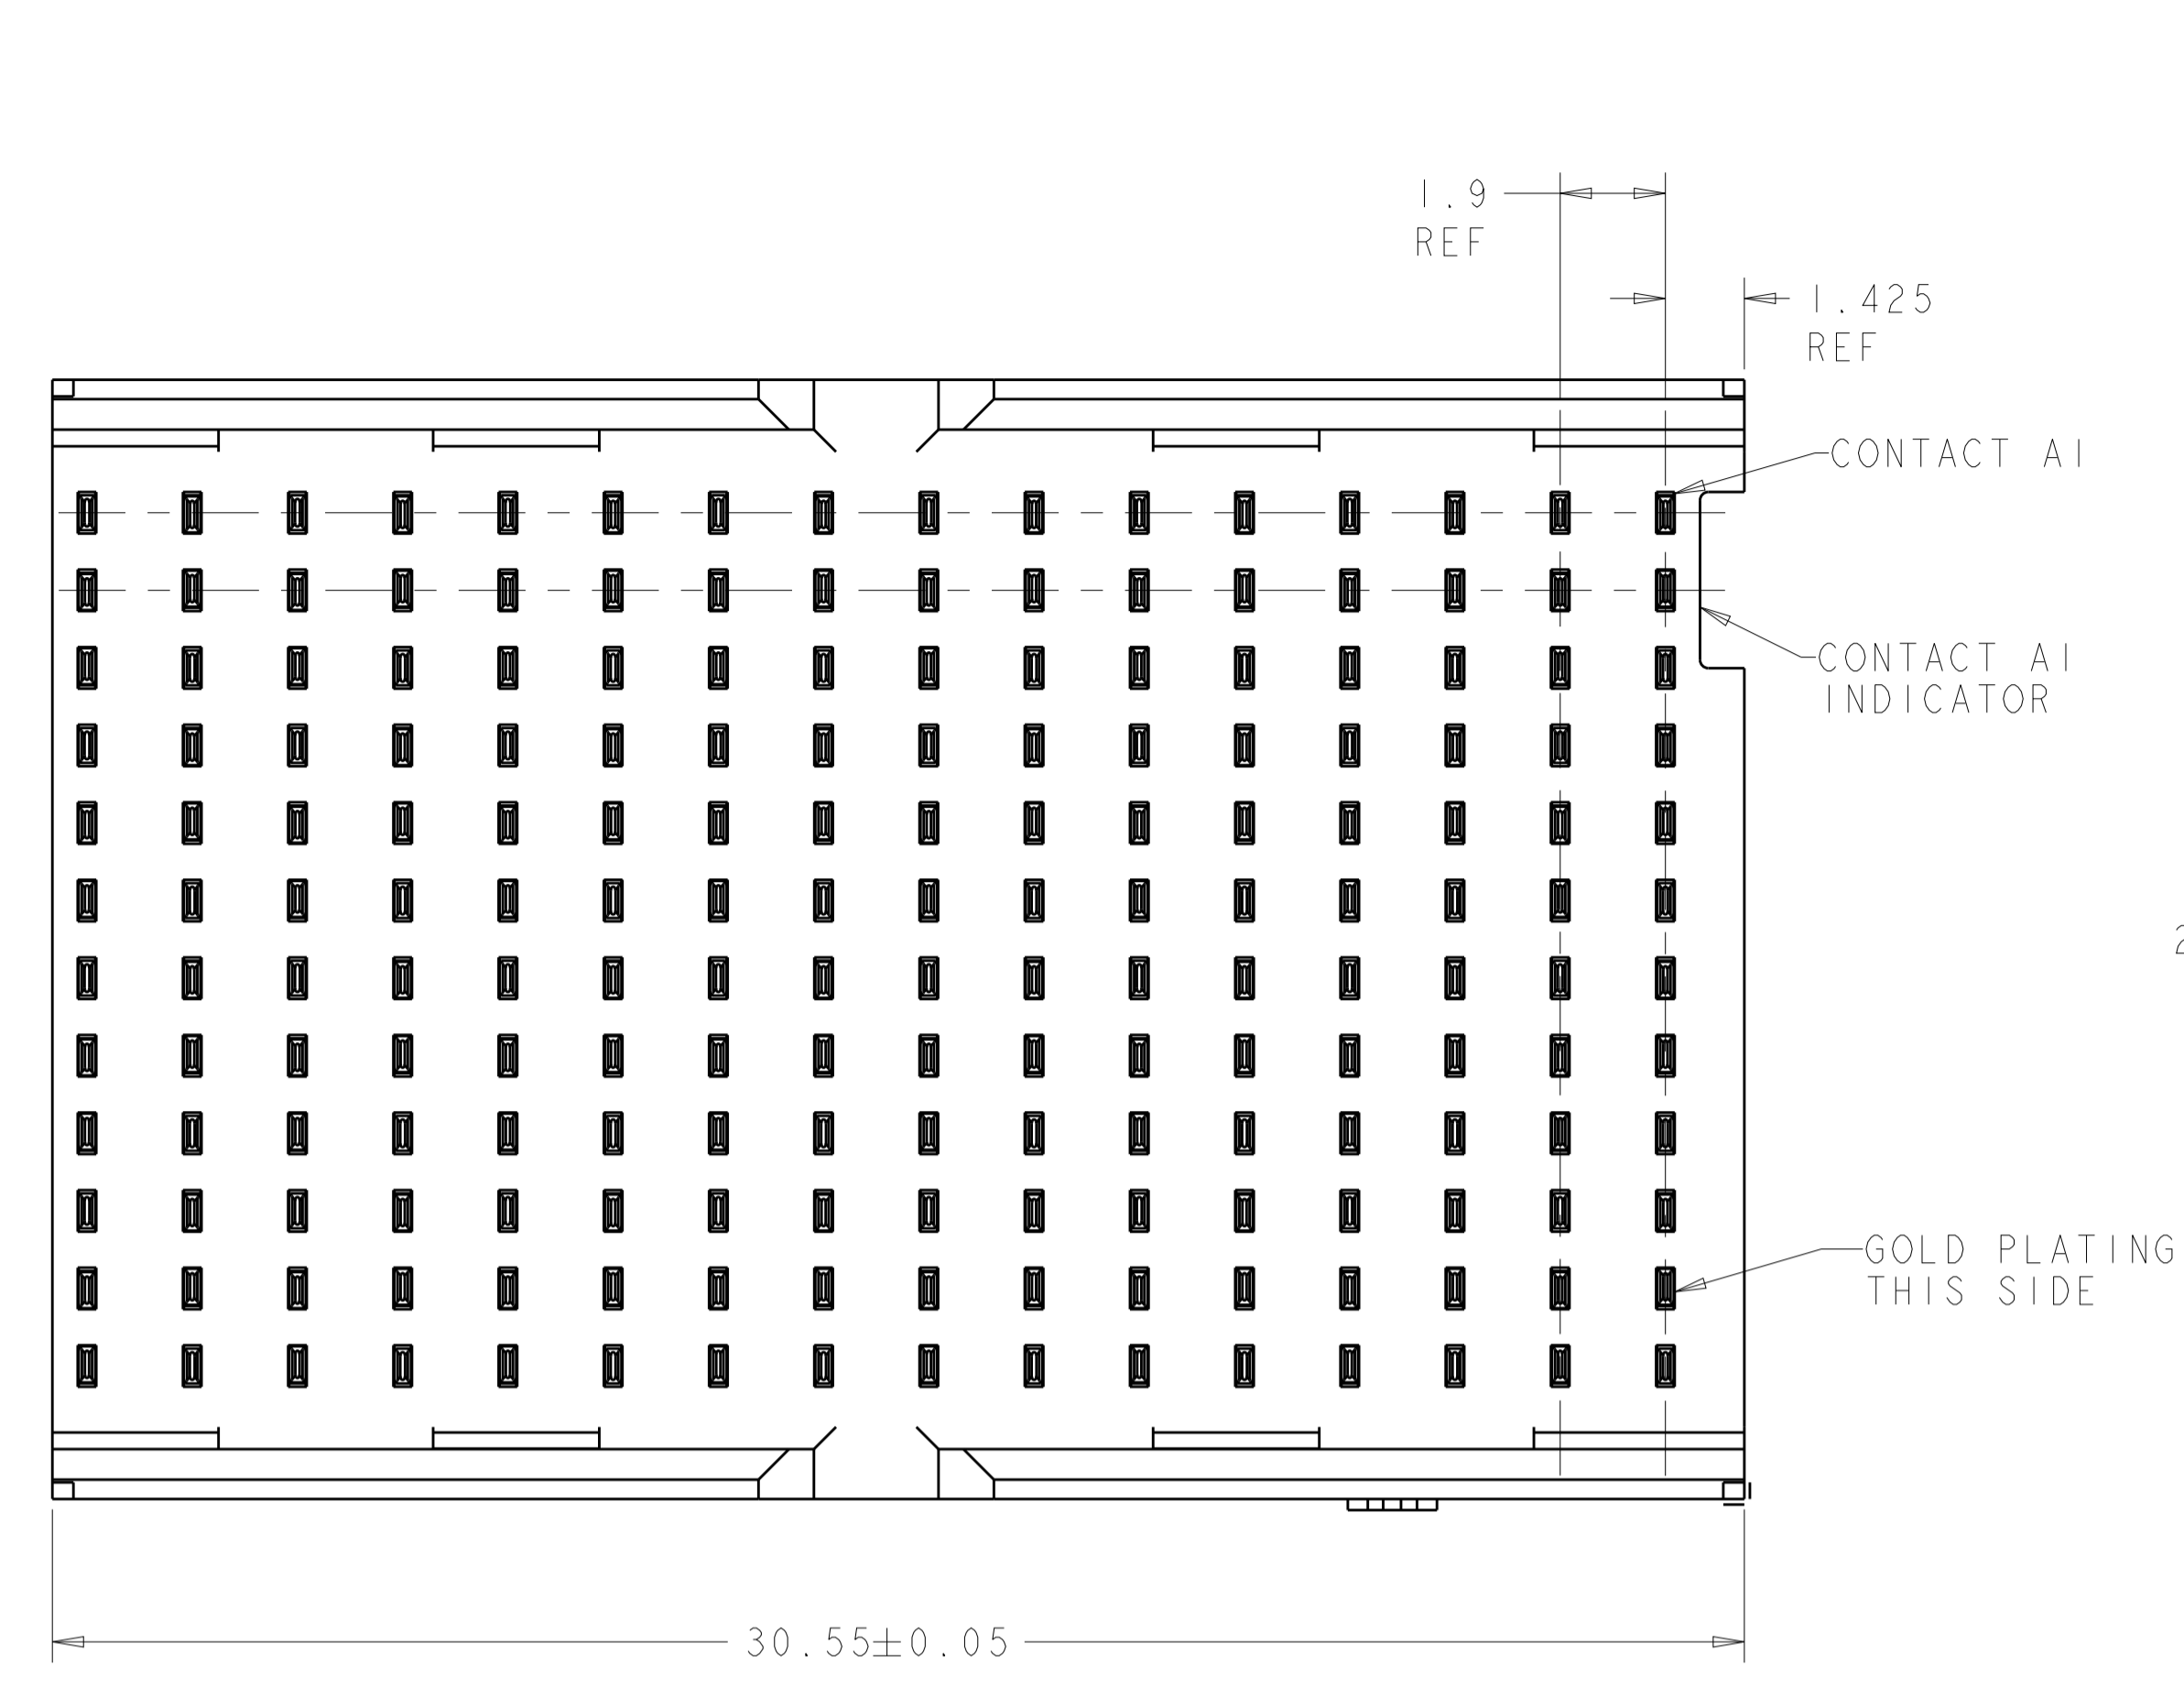

- 1 MATERIAL:
CONTACT - PHOS BRONZE
HOUSING - LCP, UL 94V-0, COLOR - BLACK
- 2 FINISH:
CONTACT AREA FINISH CONFORMS TO THE REQUIREMENTS OF TE PRODUCT SPECIFICATION 108-2303; BASED ON TELCORDIA GR-1217-CORE FOR SYSTEM QUALITY LEVEL III, APPLICATIONS IN CONTROLLED ENVIRONMENTS (CENTRAL OFFICE).
COMPLIANT PIN AREA- 0.5µm MIN MATTE TIN OVER 1.27µm MIN NICKEL.
- 3 CONNECTOR MARKED WITH PART NUMBER, DATE CODE AND STANDARD IN APPROXIMATE AREA SHOWN
- 4 DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
- 5. CONTACT AREA LUBRICATED WITH BELLCORE APPROVED LUBRICANT. TECHNICAL REFERENCE GR-1217-CORE, ISSUE 1, NOVEMBER 1995.
- 6 REFERENCE APPLICATION SPEC 114-13202 FOR RECOMMENDED PLATED THRU HOLE DIAMETER AND PLATING THICKNESSES
- 7 SHOWN LOGO OR OTHER TE OWNED LOGOS IN APPROXIMATE AREA.

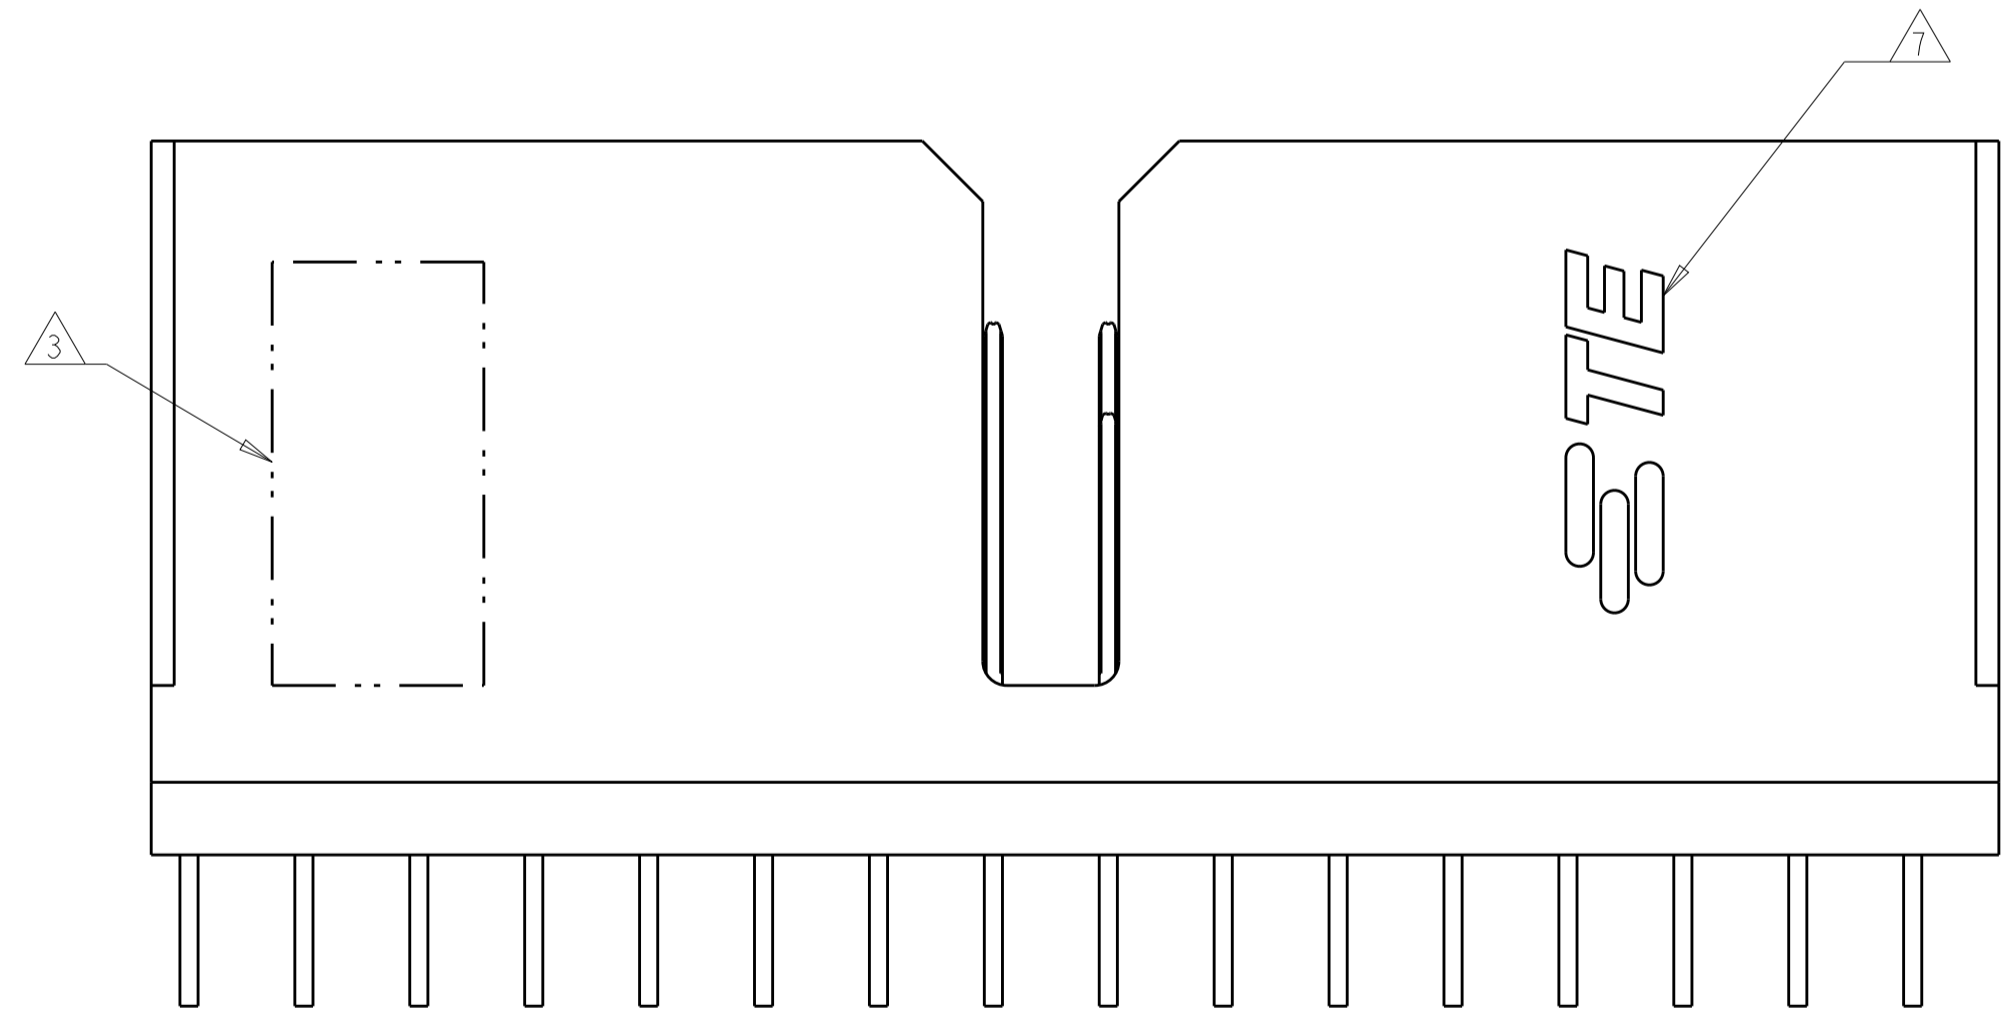

6 \oplus \ominus $\varnothing 0.05$ X Y
FINISHED HOLE SIZE AND PLATED THRU HOLES

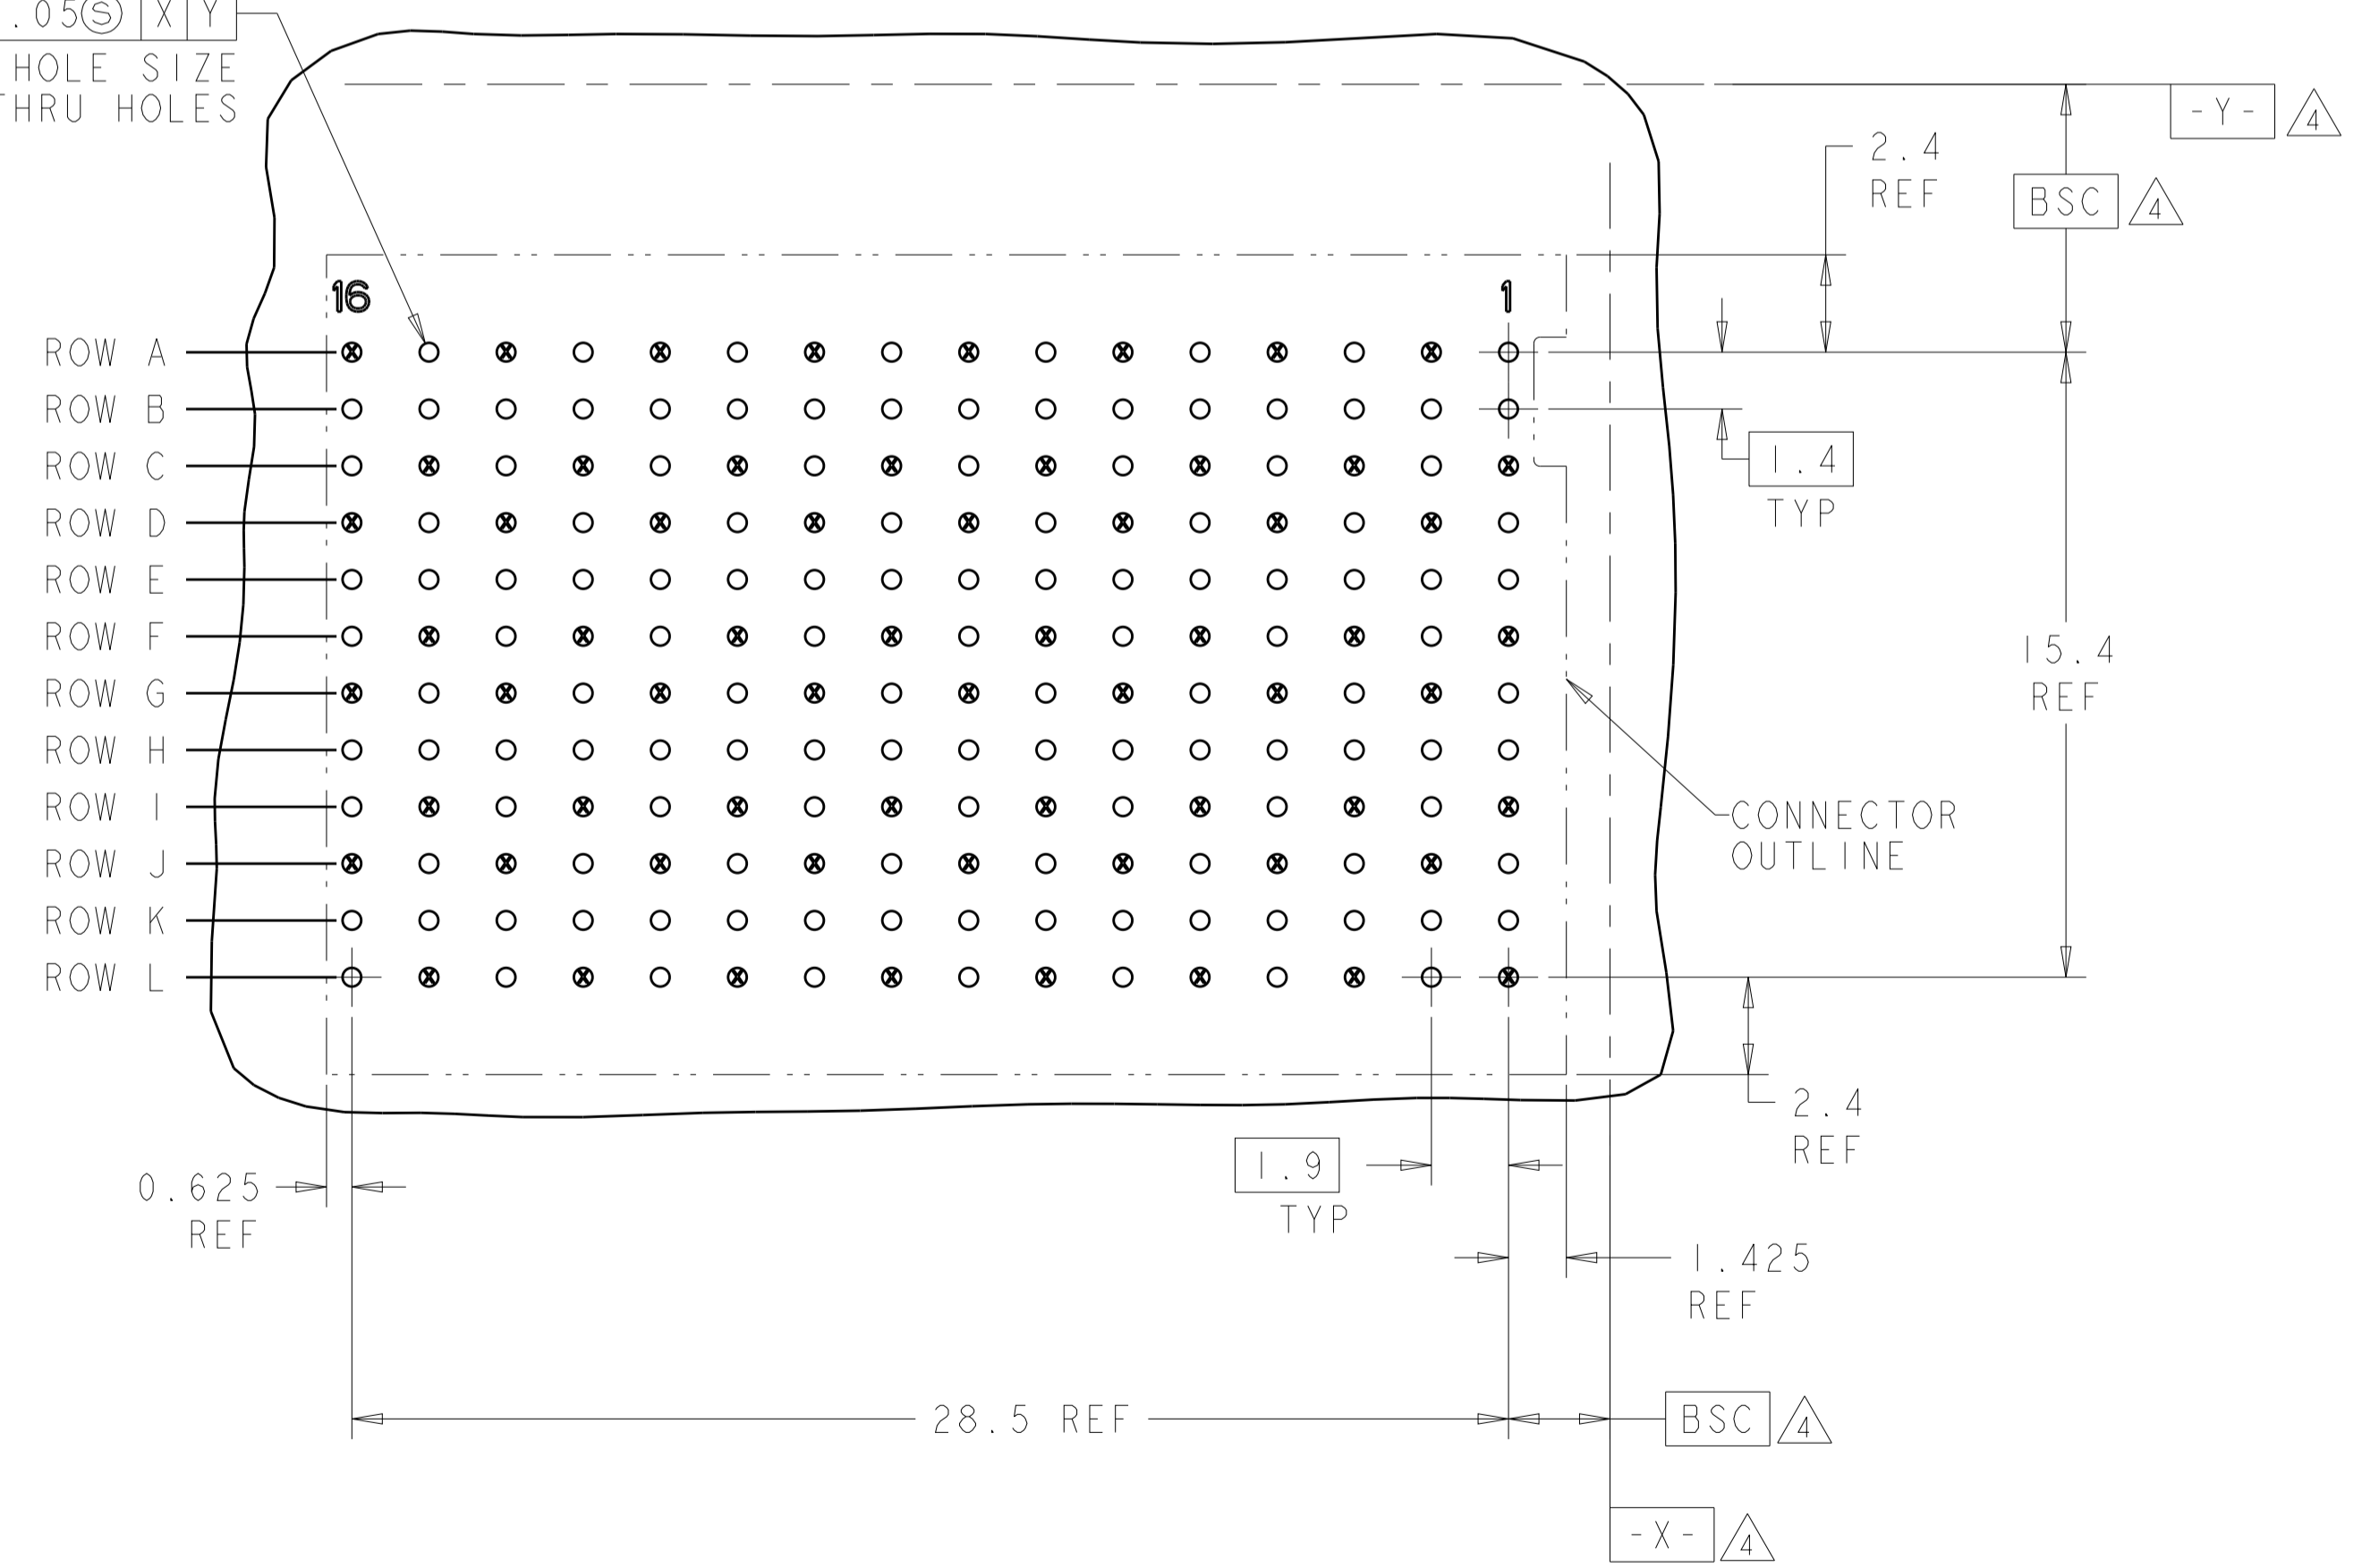

○ = SIGNAL
⊗ = GROUND
RECOMMENDED PC BOARD LAYOUT BACKPLANE, COMPONENT SIDE SHOWN
SCALE 6:1

1934315-1
PART NUMBER

| | | | |
|--|----------|----------------------------|--|
| THIS DRAWING IS A CONTROLLED DOCUMENT. | | OWN: B. MCMASTER 14JUN2007 | TE Connectivity |
| DIMENSIONS: mm | | CHK: W. DAVIS 14JUN2007 | |
| TOLERANCES UNLESS OTHERWISE SPECIFIED: | | APVD: W. DAVIS 14JUN2007 | NAME: HEADER ASSEMBLY, OPEN ENDED, 4 PAIR 16 COLUMN TinMan |
| 0 PLC ± | 1 PLC ± | PRODUCT SPEC | SIZE: A1 |
| 2 PLC ± | 3 PLC ± | APPLICATION SPEC | CAGE CODE: 1934315 |
| 4 PLC ± | ANGLES ± | WEIGHT | RESTRICTED TO |
| MATERIAL | FINISH | CUSTOMER DRAWING | SCALE: 8:1 SHEET 1 OF 1 REV G |

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)