


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
020	REVISED	7/8/98 <i>Rdy</i>	7/9/1998 <i>IC</i>

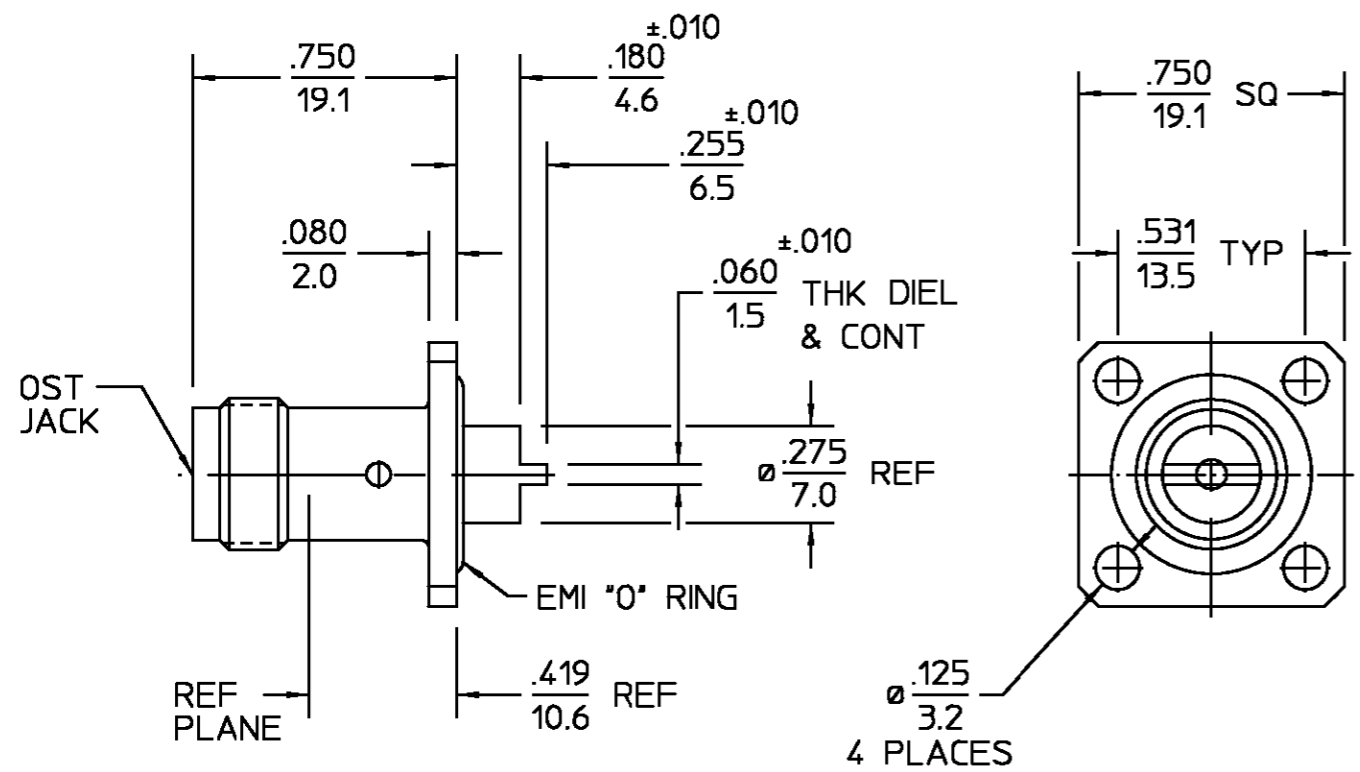

ELECTRICAL	MECHANICAL	ENVIRONMENTAL
Nominal Impedance (Ohms) <u>50</u>	Interface Dimensions MIL-STD-348, Fig. <u>313.2</u>	Temperature Rating <u>-55°C to 125°C</u>
Frequency Range (GHz) DC to <u>11</u>	Recommended Mating	Vibration MIL-STD-202, Method 204 Condition B
Volt Rating (VRMS MAX) @ Sea Level <u>500</u>	Torque <u>12 to 15 in/LBs</u>	Shock MIL-STD-202, Method 213, Condition I
VSWR <u>N/A</u>	Mating Characteristics:	Thermal Shock MIL-STD-202, Method 107, Condition B, Except High Temp Shall Be 200°C
Insertion Loss (dB MAX) <u>.06 √ f(GHz)</u>	Insertion (MAX Lbs) <u>2.0</u>	Moisture Resistance MIL-STD-202, Method 106, Except Vibration Shall Be Omitted
RF Leakage (dB MIN) <u>-60 @ 2 to 3 GHz</u>	Withdrawal (MIN Oz) <u>2.0</u>	Corrosion - MIL-STD-202, Method 101, Condition B, 5% salt spray
Corona, 70,000 Ft (VRMS MIN) <u>375</u>	Force to Engage and Disengage (in/Lbs MAX) <u>2.0</u>	
Dielectric Withstanding Voltage (VRMS MIN) @ Sea Level <u>1500</u>	Center Contact Captivation	
Contact Resistance (Milliohms MAX)	Axial (Lbs) <u>6.0</u>	
Center Contact <u>1.5</u>	Radial (in/Oz) <u>4.0</u>	
Outer Contact <u>2.0</u>	Weight (Grams) <u>TBD</u>	
Cable to Housing <u>N/A</u>		
RF High Potential @ Sea Level (VRMS MIN @ 5 MHz) <u>1000</u>		
I.R.(Megohms MIN) <u>5000</u>		

COMPONENT	MATERIAL	FINISH
HOUSING	STAINLESS STEEL PER ASTM-A484 AND ASTM-A582, TYPE 303	PASSIVATE PER QQ-P-35
DIELECTRIC	PTFE FLUOROCARBON PER ASTM-D-1457	N/A
CENTER CONTACT	BERYLLIUM COPPER PER ASTM-B-196 OR ASTM-B-197, ALLOY C17300, CONDITION H	GOLD PLATE PER MIL-G-45204
O-RING	CONDUCTIVE ELASTOMETER PER MIL-G-83528, TYPE D	N/A

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCE ON	DRAWN BY <i>B/E</i> DATE 1/21/93	<b>AMP</b> AMP Incorporated 140 Fourth Avenue Waltham, MA 02451-7599
FRAC. DEC. ANGLES ± 1/64 ±.005 ± °	CHECKED BY	
These drawings and specifications are the property of Omni Spectra Incorporated and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale of item(s) without written permission.	APPD BY <i>D/M</i> DATE 1/28/93	
USE ASS'Y PROCEDURE	NO. AP. <u>N/A</u>	TITLE OST 4 HOLE FLANGE MOUNT JACK RECEPTACLE-TAB TERMINAL
		SIZE B CODE IDENT NO. 26805 3152-5308-02 REV 020
		SCALE 2:1 SHEET 1 OF 1

CUSTOMER DRAWING

AMP PART # 1252516-1  
SHEET 1 OF 1 REV A

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)