


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

PART NO	A	B	NOTE
868312-1	8.00 [203.2]	.38 [9.6]	-
868312-2	35.00 [889.0]	.38 [9.6]	-
868312-3	90.00 [2286.0]	.38 [9.6]	-

PROD CODE	4092	LOC	DF	DIST	50	P	F	ZONE	LTR	ADD	-3 PER NPR 92-155	CT	DATE	8-92	APPD	CS			
													REVISIONS						
													DESCRIPTION	92-155	CT	DATE	8-92	APPD	CS

SOCKET, SIZE #16
 MAT'L: LEADED COPPER PER ASTM-B-301
 FINISH: GOLD PER MIL-G-45204
 OVER NICKEL PER QQ-N-290

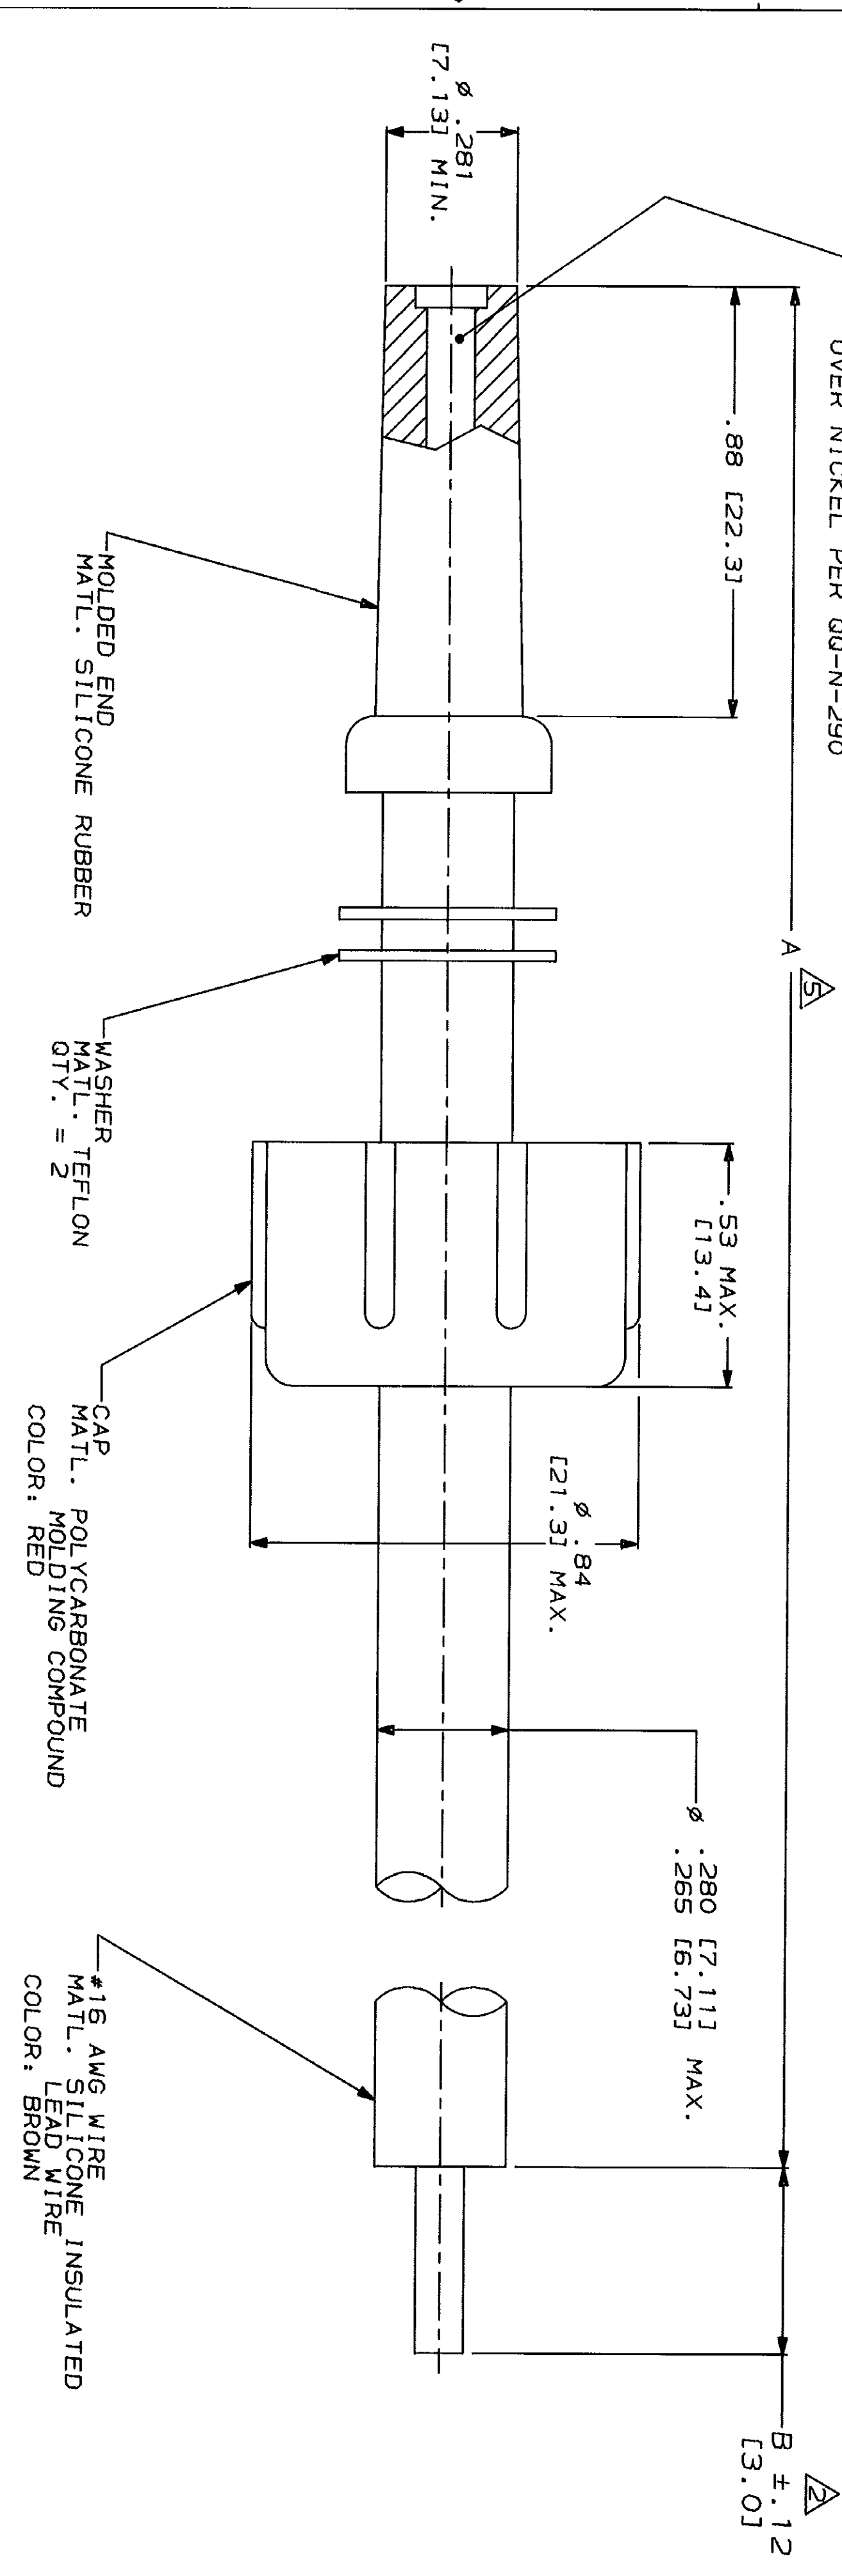

1. MARKED PER MIL-STD-130.
2. PIG-TAIL IS SOLDER DIPPED.
3. TO MATE WITH AMP LGH-1 RECP., WITH .88 [22.3] BARREL DEPTH. OPERATING VOLTAGE: 20 KVDC AT SEA LEVEL THRU 70,000 FEET, -55°C THRU +125°C
4. TOLERANCE OF LEAD LENGTH: UP TO 24 INCHES [609.6] = $\pm .12$ [± 3.0] 24 INCHES [609.6] & UP = $\pm 1\%$

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN INCHES [mm]		DR	C. C. THOMAS	5-8-92
TOLERANCES ON:		CHK	C. SHELLY	5-8-92
2 PLC DEC # .02 [0.51]		APPD	C. SHELLY	5-8-92
3 PLC DEC # -		APPD	C. C. THOMAS	5-8-92
ANGLES # -		PRODUCT SPEC	-	-
MATERIAL		APPLICATION SPEC	-	-
FINISH		WEIGHT	-	-

AMP INCORPORATED
 Morrisburg, Pa. 17105

LEAD ASS'Y, SGL. END, LGH-1 (BROWN)

SIZE	CAGE CODE	DRAWING NO
C	00779	868312
SCALE	4:1	SHEET
		1 of 1

CUSTOMER DRAWING

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)