


CUSTOMER DRAWING

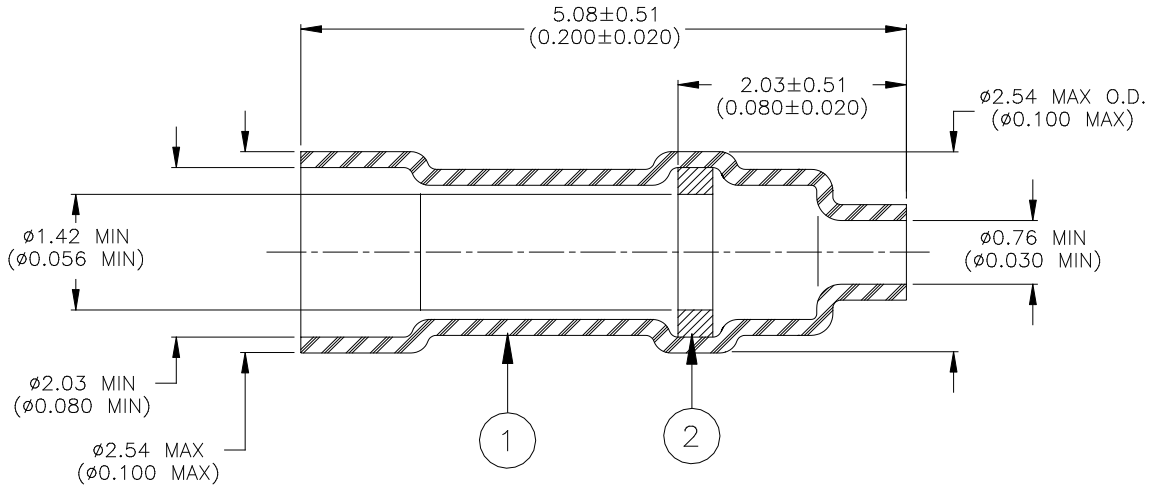


MATERIALS

1. INSULATION SLEEVE: Heat shrinkable, transparent blue, radiation cross-linked polyvinylidene fluoride.
2. SOLDER PREFORM WITH FLUX:
 - SOLDER: TYPE Sn63 per ANSI J-STD-006.
 - FLUX: TYPE ROL0 per ANSI J-STD-004.

APPLICATION

1. This part is designed for terminating 26 and 22 AWG wire to Burndy UPC connectors.
2. The sleeve is designed for those applications where headroom above the connector pin is limited.

		Raychem THERMOFIT DEVICES		TITLE: SOLDERSLEEVE, STEPPED INSULATION For Burndy UPC Connector, 0.69 x 02.54 (0.027 x 0.100) pins		
Unless otherwise specified dimensions are in millimeters. [Inches dimensions are shown in brackets]				DOCUMENT NO.: D-141-19		
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A ROUGHNESS IN MICRON	TE Connectivity reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		REV: 2	DATE: 09-Mar-2020	
DRAWN BY: M. FORONDA	DATE: 17-July-2000	ECO: ECO-20-003687	SCALE: NTS	SIZE: A	SHEET: 1 of 1	

© 09-Mar-2020 Tyco Electronics Corporation. All rights reserved.

If this document is printed it becomes uncontrolled. Check for the latest revision.

TE Connectivity, TE connectivity (logo), Raychem, THERMOFIT, SolderSleeve are trademarks

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)