


UNIT OF MEASURE	A	B	C	D	E	G	L	MAX. BUNDLE DIA.	MIN. TENSILE STRENGTH
INCHES	.787	.346	.188	.242	.049	.212	8.48	1.75	50 lbs.
MM	19.99	8.79	4.78	6.15	1.24	5.38	215.	44.45	22.68 kg.

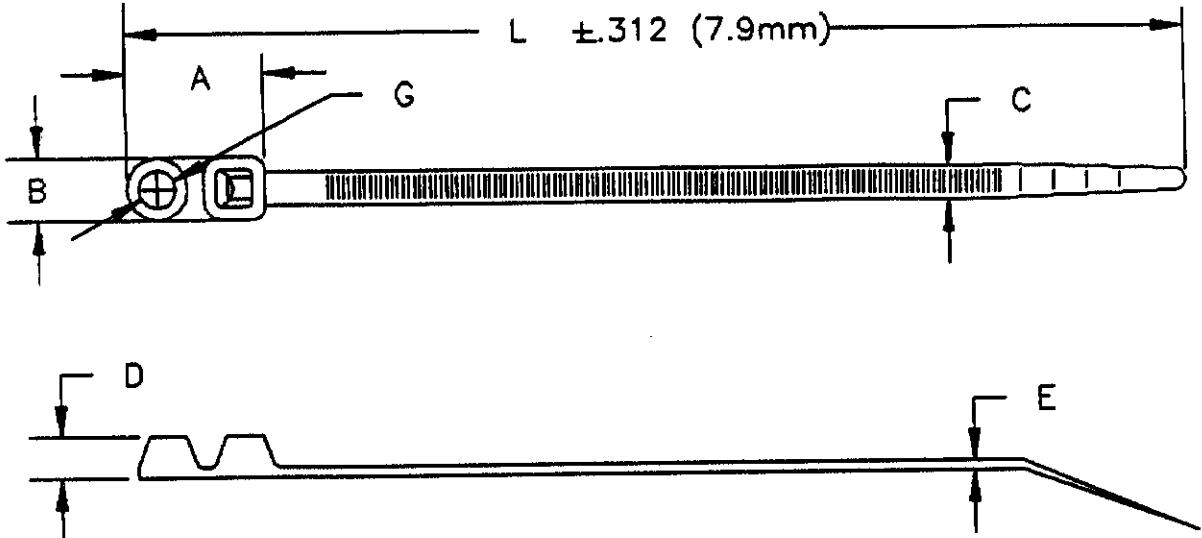

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN AMP PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM AMP INCORPORATED, HARRISBURG, PA.

NOTES:

1. MOISTURIZED 1 TO 2.5% WATER.
2. PACKAGED IN HEAT SEALED 3 MIL POLYBAG WITH LABEL PER DWG 404707.
3. OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

APC ENGINEERING

JUL 13 1990

ISSUED BY *Clu*

CUSTOMER DRAWING UNPUBLISHED

	2-608694-9	NATURAL-1000 PCS. SMY134M	
	1-608694-9	NATURAL-100 PCS. SMY134C	
3	2-608694-0	BLACK-1000 PCS. SMY134MB	
	1-608694-0	BLACK-100 PCS. SMY134CB	

LOC	DIST	DWG SIZE	PART No.	DESCRIPTION	ITEM NO
D	1				

QTY. REQ'D. PER ASSY.		PARTS LIST	
		MATERIAL	HEAT TREAT
		NYLON 6/6	
		FINISH	
		DRAWN BY:	DATE:
		AD-TEK/VL	8/22/90
		CHECK BY:	RELEASE:
		BJM 6/90	J. Hamed 6/90
		<b>AMP</b>   AMP INCORPORATED Harrisburg, Pa.	
		NAME: # 10 SCREW MOUNT CABLE TIE 8-1/2 INCH	
		REMOVE BURRS, BREAK SHARP EDGES, .013 R. MAX.	
		SCALE:	DRAWING No.:
		A	608694
		SHEET :	REV.:
		1 OF 1	01

P	F	LTR	REVISION RECORD	APP	DATE

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)