
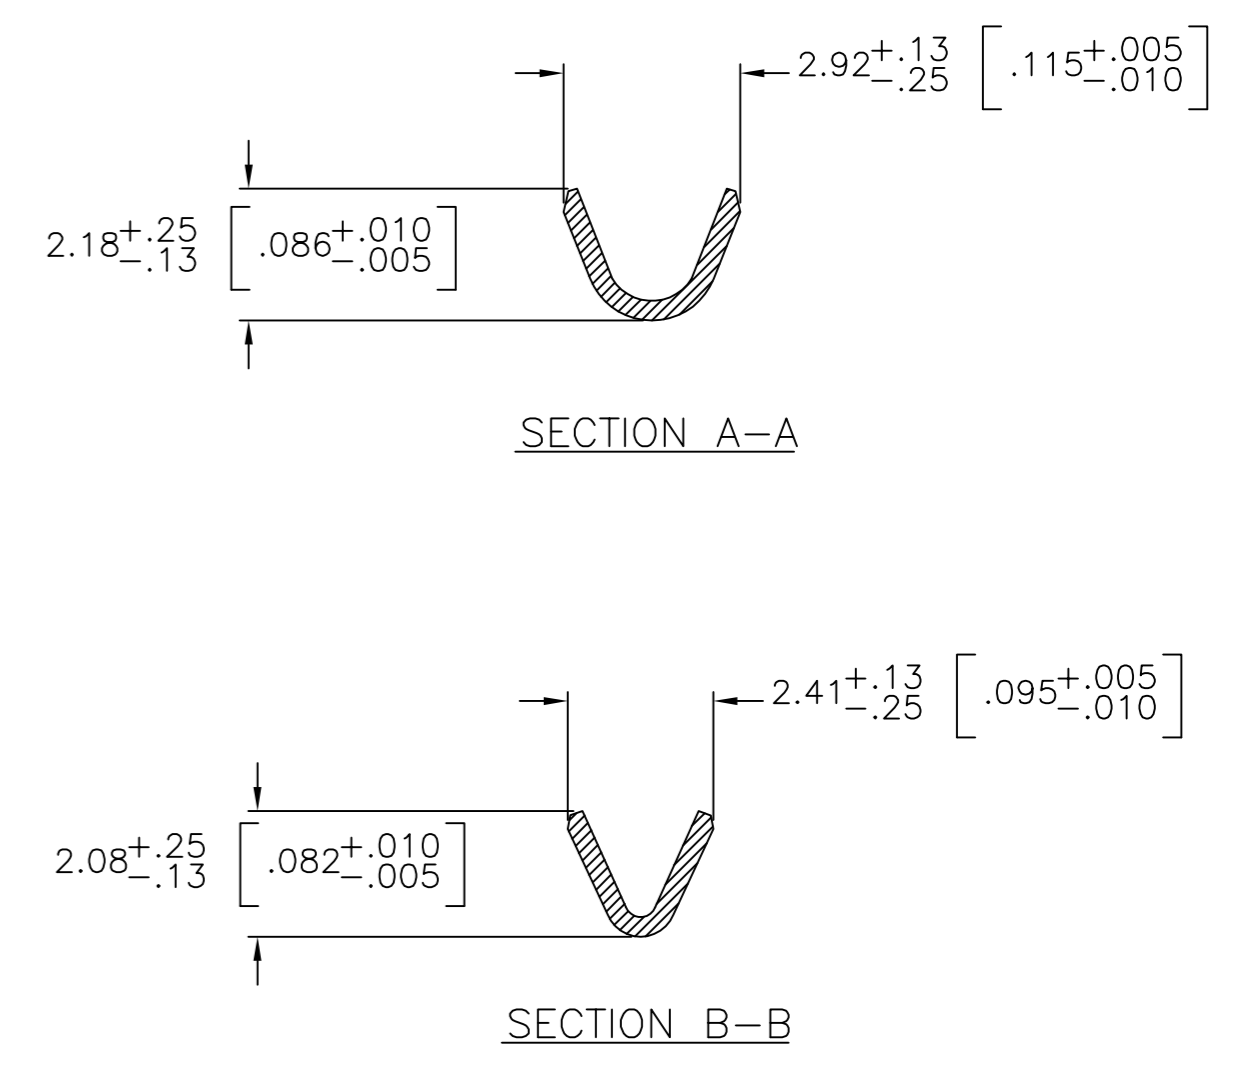


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

| REVISIONS | | | | | |
|-----------|-----|---------------------------|-----------|-----|------|
| P | LTR | DESCRIPTION | DATE | DWN | APVD |
| AZ | | REVISED PER ECO-12-012320 | 04JUL12 | KH | MZ |
| BA | | REVISED PER ECO-17-009977 | 12JUL2017 | RS | MZ |

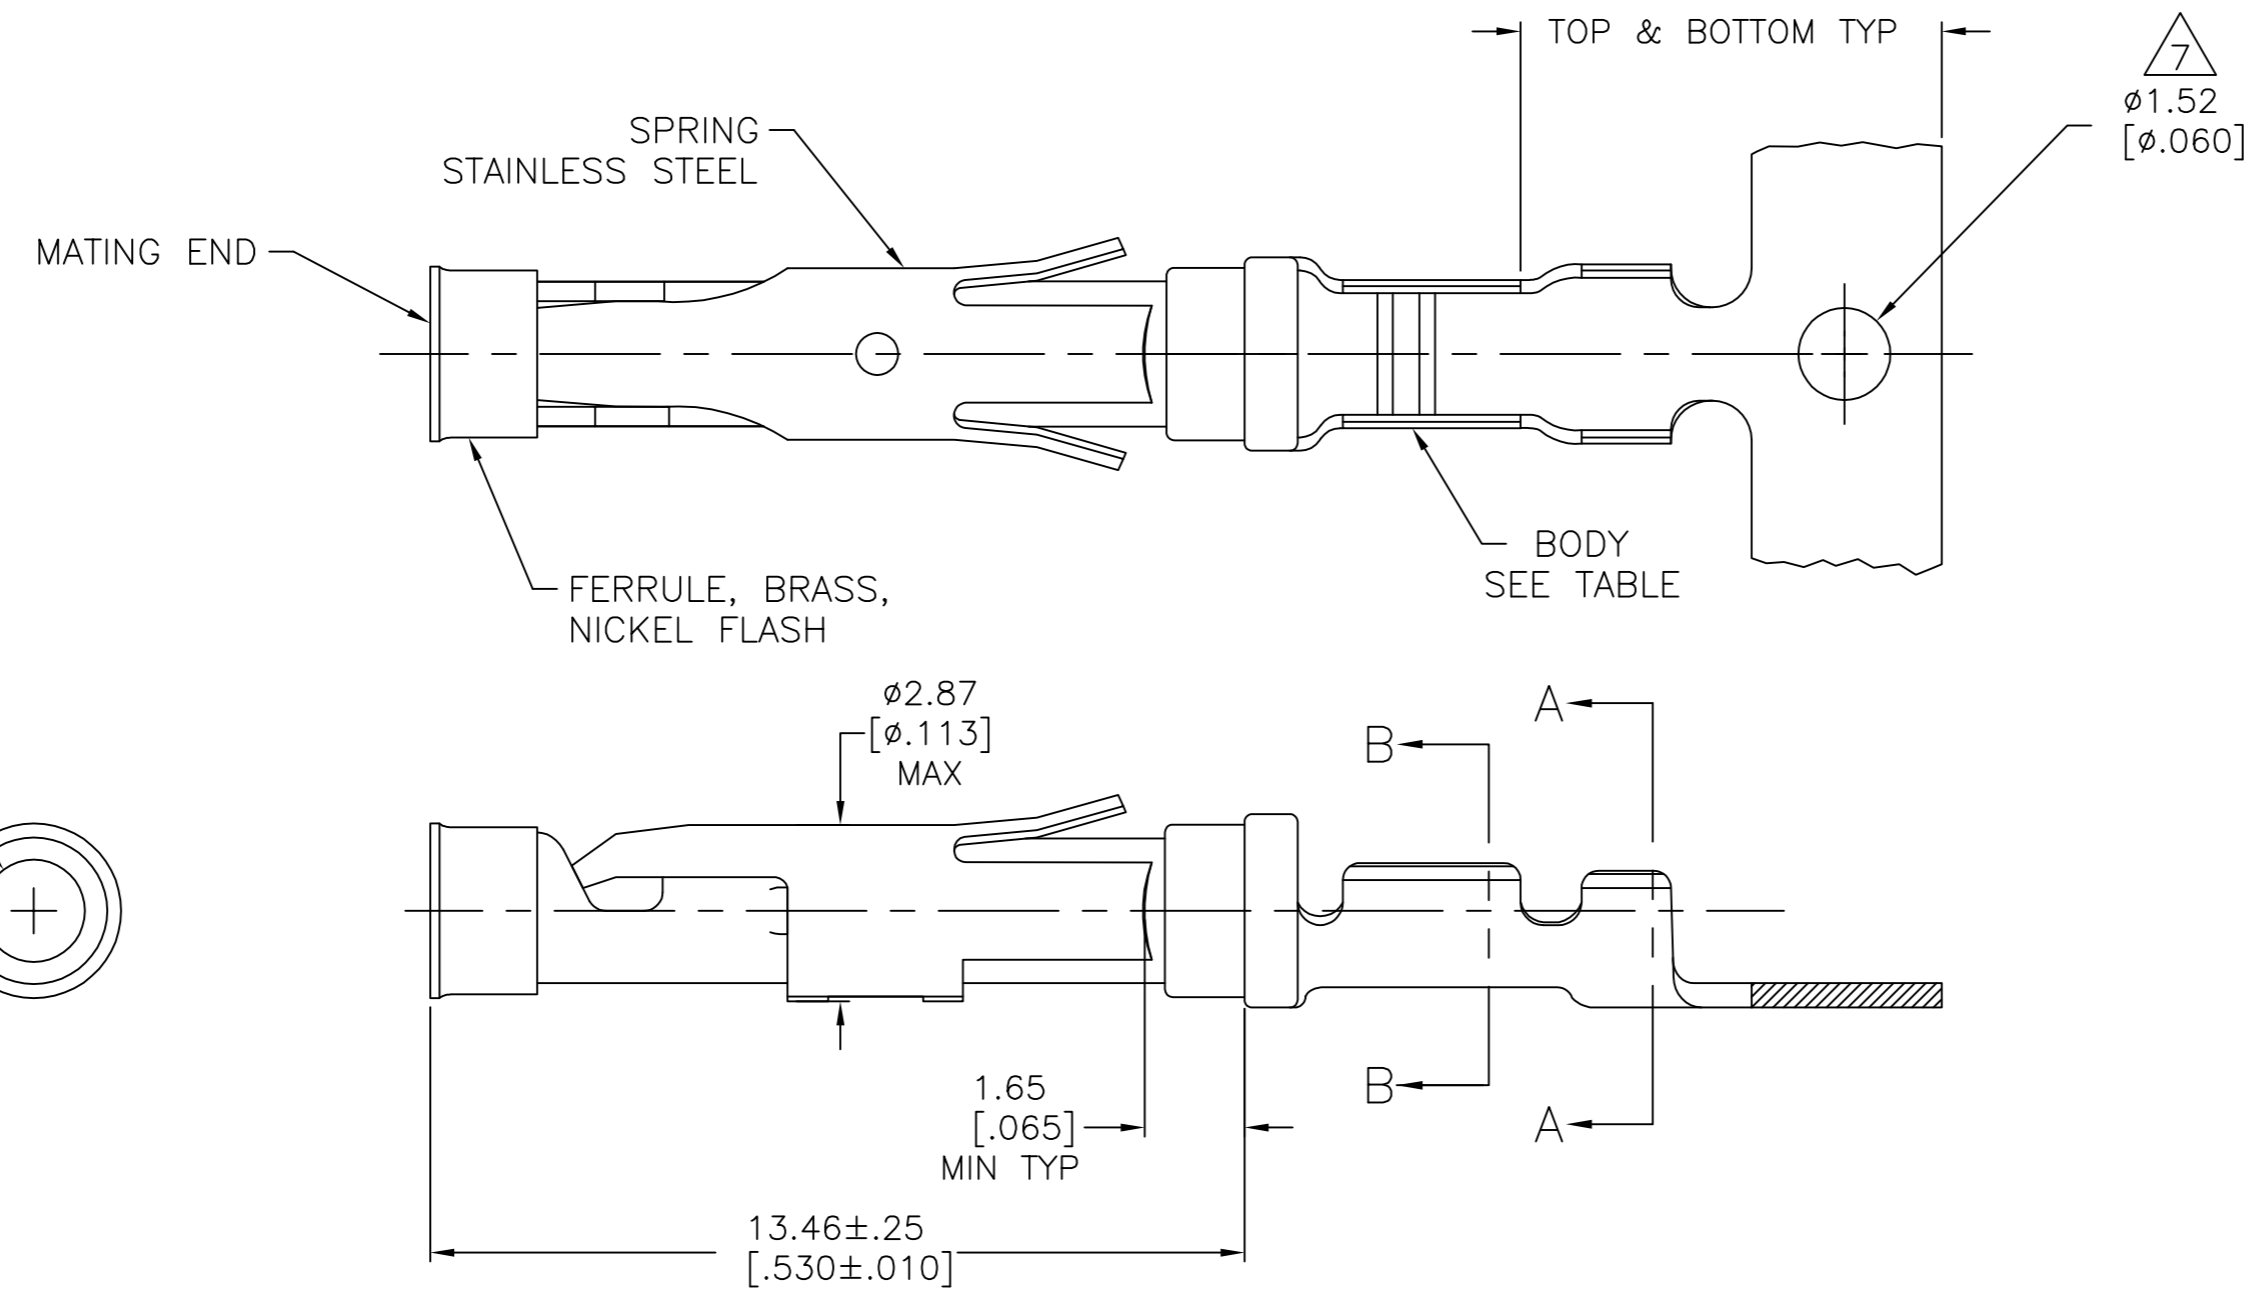

- 1 0.76µm [.000030] MIN GOLD PER MIL-G-45204 ON MATING END FOR A LENGTH OF 5.08 [.200] MIN WITH 1.27µm [.000050] MIN MATTE TIN PLATE IN WIRE CRIMP AREA, BOTH OVER 0.76µm [.000030] MIN NICKEL PER QQ-N-290.
- 2 1.27µm [.000050] MIN TIN-LEAD PER MIL-T-10727 OVER 0.76µm [.000030] MIN NICKEL PER QQ-N-290.
- 3 0.76µm [.000030] MIN GOLD PER MIL-G-45204 ON MATING END FOR A LENGTH OF 5.08 [.200] MIN WITH A UNIFORM GRADIENT TO 0.25 [.000010] MIN GOLD PER MIL-G-45204 ON THE REMAINDER OVER 0.76µm [.000030] NICKEL PER QQ-N-290.
- 4 0.38µm [.000015] MIN GOLD PER MIL-G-45204 ON MATING END FOR A LENGTH OF 5.08 [.200] MIN WITH 1.27µm [.000050] MIN MATTE TIN PLATE IN WIRE CRIMP AREA, BOTH OVER 0.76µm [.000030] MIN NICKEL PER QQ-N-290.
- 5 1.27µm [.000050] MIN GOLD PER MIL-G-45204 ON MATING END FOR A LENGTH OF 5.08 [.200] MIN WITH GOLD FLASH ON REMAINDER OVER 1.90µm [.000075] MIN NICKEL PER QQ-N-290.
- 6 0.15µm [.000020] MIN GOLD PER MIL-G-45204 ON MATING END FOR A LENGTH OF 5.08 [.200] MIN WITH GOLD FLASH ON REMAINDER OVER 1.27µm [.000050] MIN NICKEL PER QQ-N-290.
- 7 GOLD PLATING NEED NOT APPEAR IN THIS AREA EXCEPT 1-66104-6 & 1-66104-7 HAVE GOLD PLATING ON INSULATION BARREL.
- 8 REVERSE REELED FOR MINI-APPLICATOR.
- 9 WIRE RANGE 24-20 AWG. INSULATION RANGE 1.02 [.040]-2.03 [.080].
- 10 0.38µm [.000015] MIN GOLD PER MIL-G-45204 ON MATING END FOR A LENGTH OF 5.08 [.200] MIN, 1.27µm [.000050] MIN TIN-LEAD PER MIL-T-10727 FOR A LENGTH OF 5.69 [.224] MIN ON OPPOSITE END, BOTH OVER 1.27µm [.000050] MIN NICKEL PER QQ-N-290 ON ENTIRE CONTACT.
- 11 0.76µm [.000030] MIN GOLD PER MIL-G-45204 ON MATING END FOR A LENGTH OF 5.08 [.200] MIN WITH GOLD FLASH ON THE REMAINDER OVER 1.27µm [.000050] MIN NICKEL PER QQ-N-290.
- 12 1.27µm [.000050] MIN TIN PER MIL-T-10727 OVER .076µm [.000030] MIN NICKEL PER QQ-N-290.
- 13 0.38µm [.000015] MIN GOLD PER MIL-G-45204 ON MATING END FOR A LENGTH OF 5.08 [.200] MIN, 1.27µm [.000050] MIN TIN PER MIL-T-10727 FOR A LENGTH OF 5.69 [.224] MIN ON OPPOSITE END, BOTH OVER 1.27µm [.000050] MIN NICKEL PER QQ-N-290 ON ENTIRE CONTACT.
- 15 2.54µm [.000100] MIN SILVER OVER 0.76µm [.000030] MIN NICKEL PER QQ-N-290
- 16 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI
- 17 SUPERCEDED BY 3-66104-2

| | | | | | | |
|----|----------|-------------|----|-----------------|-----------------|-----------|
| 16 | OBSOLETE | 8 | 15 | BRASS | - | 3-66104-3 |
| | OBSOLETE | 8 | 13 | BRASS | - | 3-66104-2 |
| | OBSOLETE | 8 | 12 | BRASS | - | 3-66104-1 |
| | | 8 | 12 | BRASS | 1-66105-9 | 3-66104-0 |
| | STANDARD | 12 | | BRASS | 1-66105-9 | 2-66104-9 |
| 14 | | 8 | 11 | BRASS | - | 2-66104-7 |
| | OBSOLETE | 8 | 10 | BRASS | 1-66105-4 | 2-66104-6 |
| | | 8 | 2 | BRASS | - | 2-66104-5 |
| | OBSOLETE | 8 | 1 | PHOSPHOR BRONZE | 1-66105-3 | 2-66104-3 |
| | OBSOLETE | 8 | 2 | PHOSPHOR BRONZE | 1-66105-2 | 2-66104-2 |
| | OBSOLETE | 8 | 6 | BRASS | - | 1-66104-9 |
| | OBSOLETE | 8 | 5 | BRASS | - | 1-66104-7 |
| | OBSOLETE | STANDARD | 5 | BRASS | 1-66105-0 | 1-66104-6 |
| | | 8 | 1 | BRASS | 66105-4 | 66104-9 |
| | | 8 | 4 | BRASS | 66105-3 | 66104-8 |
| | | 8 | 2 | BRASS | 66105-2 | 66104-7 |
| | | 8 | 3 | BRASS | 66105-1 | 66104-6 |
| | STANDARD | 1 | | BRASS | 66105-4 | 66104-4 |
| | STANDARD | 4 | | BRASS | 66105-3 | 66104-3 |
| | STANDARD | 2 | | BRASS | 66105-2 | 66104-2 |
| | STANDARD | 3 | | BRASS | 66105-1 | 66104-1 |
| | REELING | BODY FINISH | | BODY MATERIAL | LOOSE PIECE REF | PART NO. |

THIS DRAWING IS A CONTROLLED DOCUMENT.

| | | | |
|-------------------------|--|----------------------------|--------------------|
| DIMENSIONS: mm [INCHES] | TOLERANCES UNLESS OTHERWISE SPECIFIED: | DWN V. FURLER 22JUL2003 | |
| | 0 PLC ± - | CHK G. STEINHAUER 22JUL03 | |
| | 1 PLC ± - | APVD G. STEINHAUER 22JUL03 | |
| | 2 PLC ± 0.13 [.005] | PRODUCT SPEC | |
| MATERIAL SEE CALLOUTS | FINISH SEE CALLOUTS | APPLICATION SPEC | NAME |
| | | WEIGHT - | SIZE A2 |
| | | CUSTOMER DRAWING | CAGE CODE 00779 |
| | | | DRAWING NO C=66104 |
| | | | RESTRICTED TO |
| | | | SCALE 8:1 |
| | | | SHEET 1 of 1 |
| | | | REV BA |

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)