
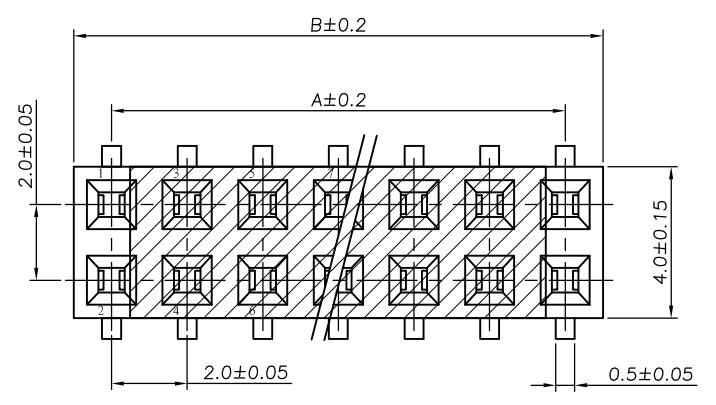
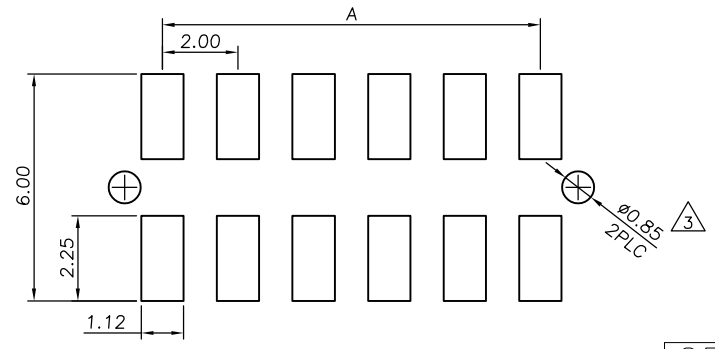


THIS DRAWING IS UNPUBLISHED
RELEASED FOR PUBLICATION AUG 2006.
ALL RIGHTS RESERVED.

© COPYRIGHT 2006 By -

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
IR	-		A4	REVISED PER ECO-12-013073	16JUL12	KH	JO

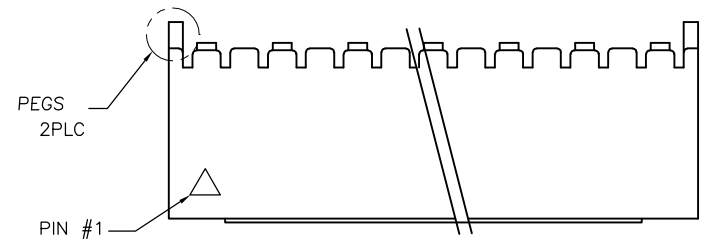


RECOMMENDED PCB LAYOUT


OBSOLETE
OBSOLETE
OBSOLETE
OBSOLETE
OBSOLETE
OBSOLETE
OBSOLETE
OBSOLETE
OBSOLETE
OBSOLETE

NO, SEE VIEWS 2a, 2b

38.00	40.00	40	9-1734516-0
36.00	38.00	38	8-1734516-8
34.00	36.00	36	8-1734516-6
32.00	34.00	34	8-1734516-4
30.00	32.00	32	8-1734516-2
28.00	30.00	30	8-1734516-0
26.00	28.00	28	7-1734516-8
24.00	26.00	26	7-1734516-6
22.00	24.00	24	7-1734516-4
20.00	22.00	22	7-1734516-2
18.00	20.00	20	7-1734516-0
16.00	18.00	18	6-1734516-8
14.00	16.00	16	6-1734516-6
12.00	14.00	14	6-1734516-4
10.00	12.00	12	6-1734516-2
8.00	10.00	10	6-1734516-0
6.00	8.00	8	5-1734516-8

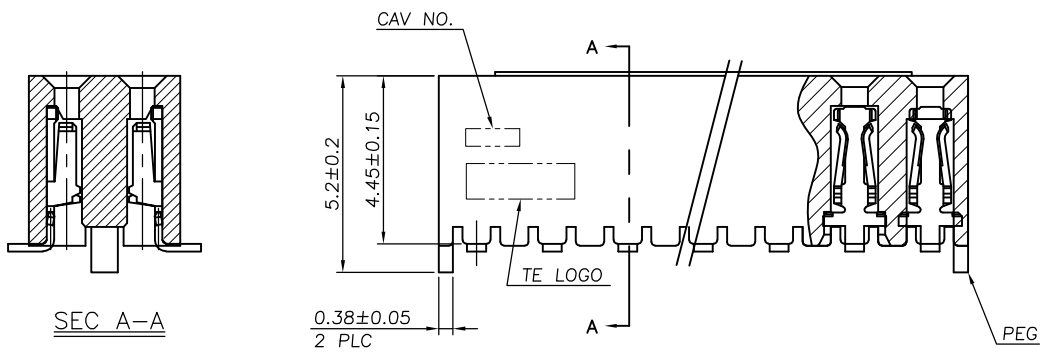

1a

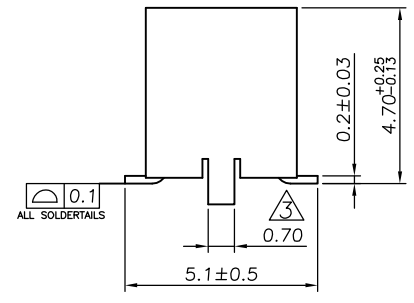


1b


OBSOLETE
OBSOLETE
OBSOLETE
OBSOLETE
OBSOLETE
OBSOLETE
OBSOLETE

YES, SEE VIEWS 1a, 1b

38.00	40.00	40	4-1734516-0
36.00	38.00	38	3-1734516-8
34.00	36.00	36	3-1734516-6
32.00	34.00	34	3-1734516-4
30.00	32.00	32	3-1734516-2
28.00	30.00	30	3-1734516-0
26.00	28.00	28	2-1734516-8
24.00	26.00	26	2-1734516-6
22.00	24.00	24	2-1734516-4
20.00	22.00	22	2-1734516-2
18.00	20.00	20	2-1734516-0
16.00	18.00	18	1-1734516-8
14.00	16.00	16	1-1734516-6
12.00	14.00	14	1-1734516-4
10.00	12.00	12	1-1734516-2
8.00	10.00	10	1-1734516-0
6.00	8.00	8	0-1734516-8

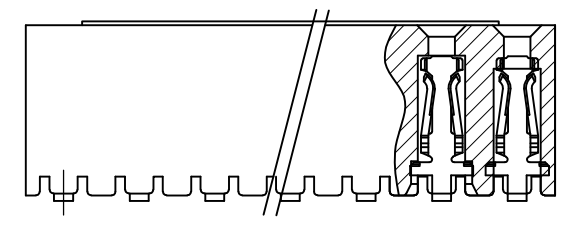

2a



2b


OBSOLETE
OBSOLETE
OBSOLETE
OBSOLETE
OBSOLETE
OBSOLETE
OBSOLETE

ALIGNMENT PEGS	A	B	No. of CONTACTS	PART NUMBER
	DIMENSIONS			



- 1 MATERIAL :
HOUSING : THERMOPLASTIC, UL94V-0, BLACK COLOR.
CONTACT : PHOSPHOR BRASS, THICKNESS=0.20MM.
- 2 FINISH :
30M" MIN. GOLD PLATED ON CONTACT AREA
100M" MIN. MATTE TIN PLATED ON SOLDER TAIL,
50M" MIN. NICKEL UNDERPLATED OVER ALL.
- 3 ONLY APPLIES TO
P/NS. : 0-1734516-8 ~ 4-1734516-0
- 4 REFLOW SOLDER CAPABLE TO 245°C PER TE SPEC 109-201, CONDITION A.
- 5 QUALIFICATION TEST REPORT: 501-57197

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 07APR2006 O.HU	TE Connectivity AMPMODU 2.0mm PITCH, REC CONN, SMT, VERTICAL MOUNT													
DIMENSIONS: mm		CHK 07APR2006 S.HOU														
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD 07APR2006 W.J.KE														
<table border="1"> <tr><td>0 PLC</td><td>± -</td></tr> <tr><td>1 PLC</td><td>± 0.20</td></tr> <tr><td>2 PLC</td><td>± 0.10</td></tr> <tr><td>3 PLC</td><td>± 0.05</td></tr> <tr><td>4 PLC</td><td>± -</td></tr> <tr><td>ANGLES</td><td>± 3'</td></tr> </table>		0 PLC			± -	1 PLC	± 0.20	2 PLC	± 0.10	3 PLC	± 0.05	4 PLC	± -	ANGLES	± 3'	PRODUCT SPEC 108-57197
0 PLC	± -															
1 PLC	± 0.20															
2 PLC	± 0.10															
3 PLC	± 0.05															
4 PLC	± -															
ANGLES	± 3'															
MATERIAL		APPLICATION SPEC -														
FINISH		WEIGHT -	SIZE A3	CAGE CODE 00779	DRAWING NO C-1734516	RESTRICTED TO -										
CUSTOMER DRAWING			SCALE 5:1	SHEET 1 OF 2	REV A4											


THIS DRAWING IS UNPUBLISHED
 © COPYRIGHT 2006 By -
 ALL RIGHTS RESERVED.

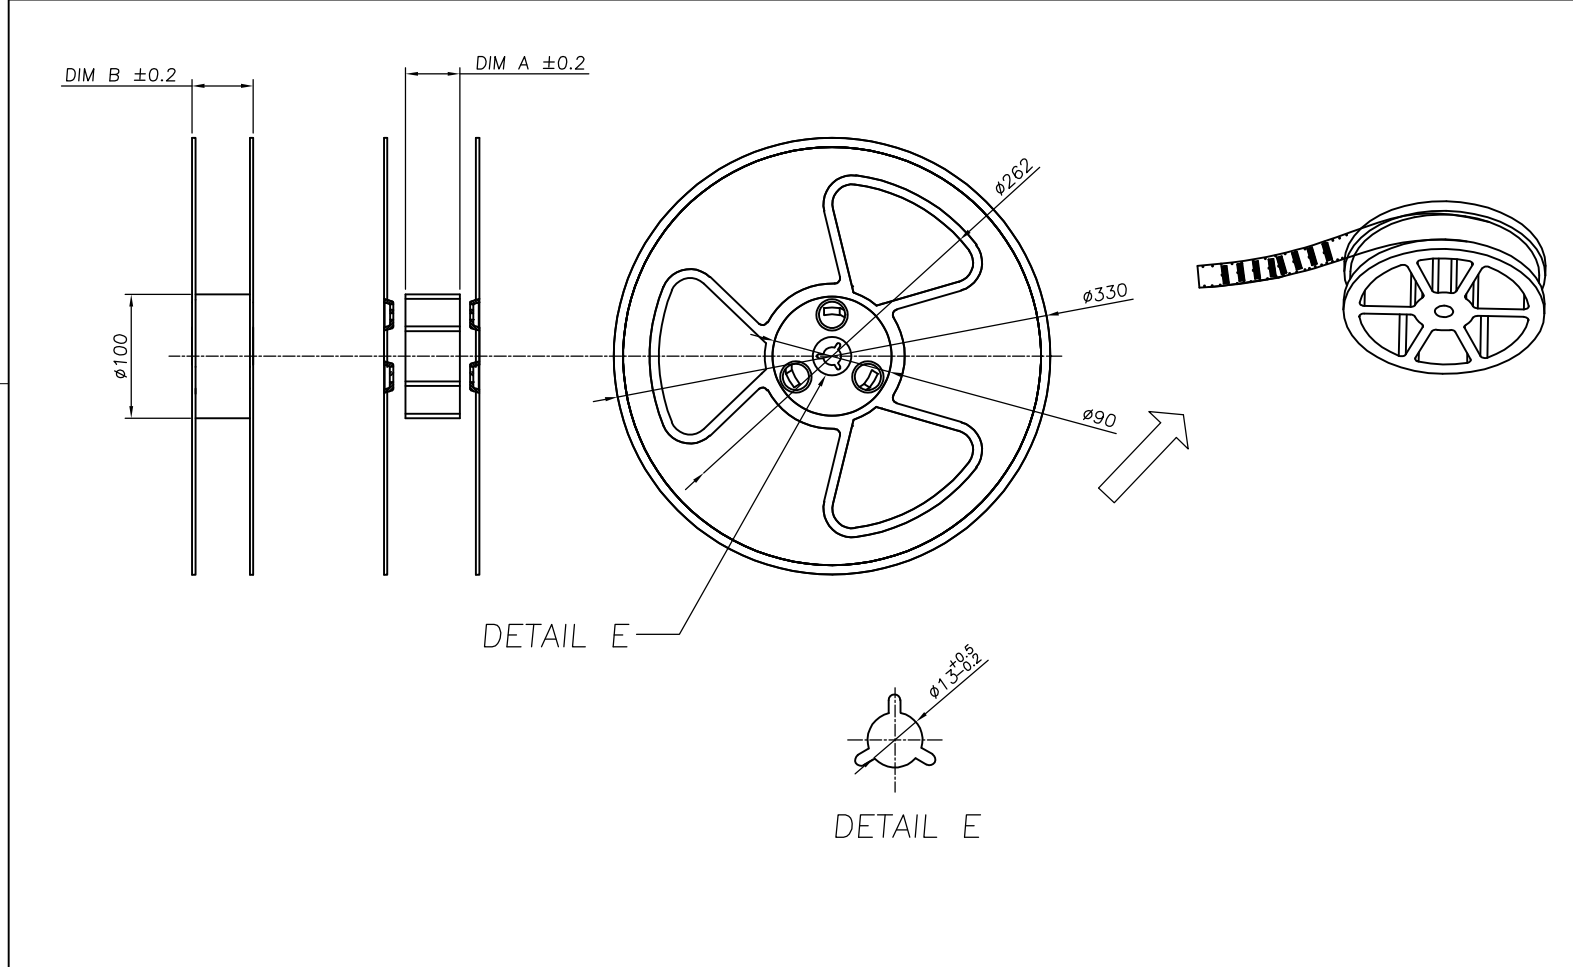

LOC	DIST	REVISIONS					
IR	-	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-

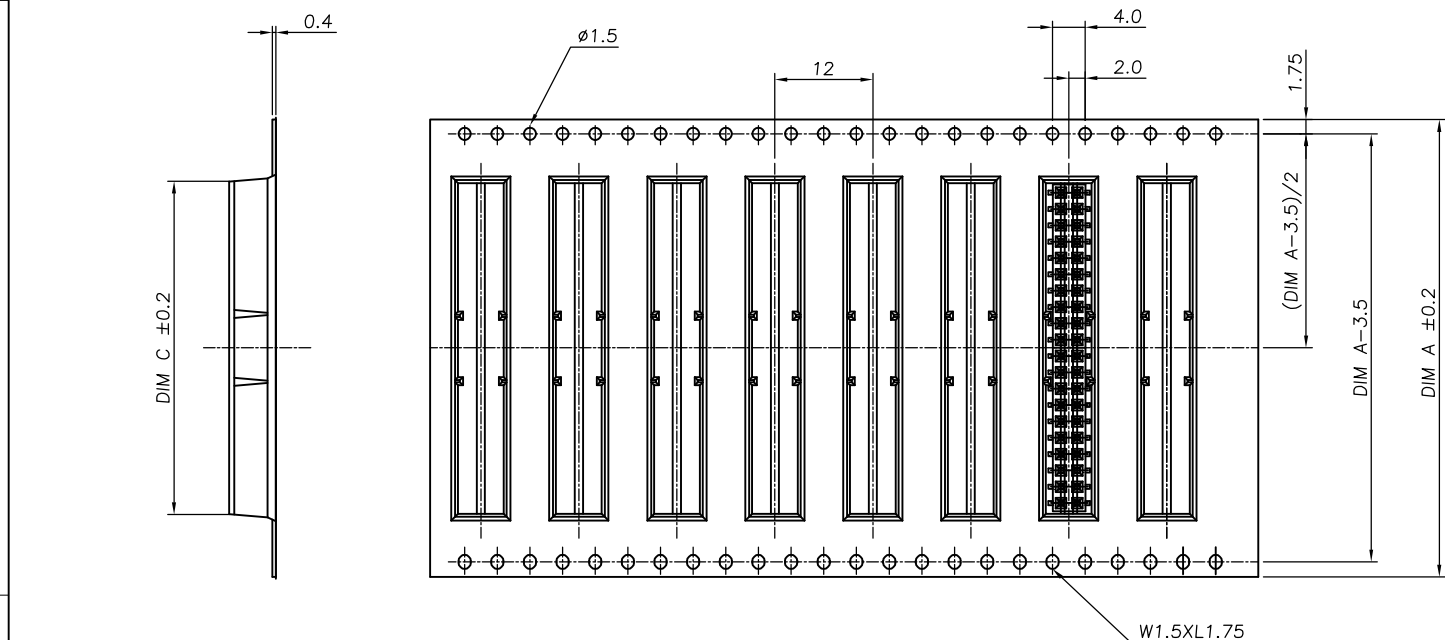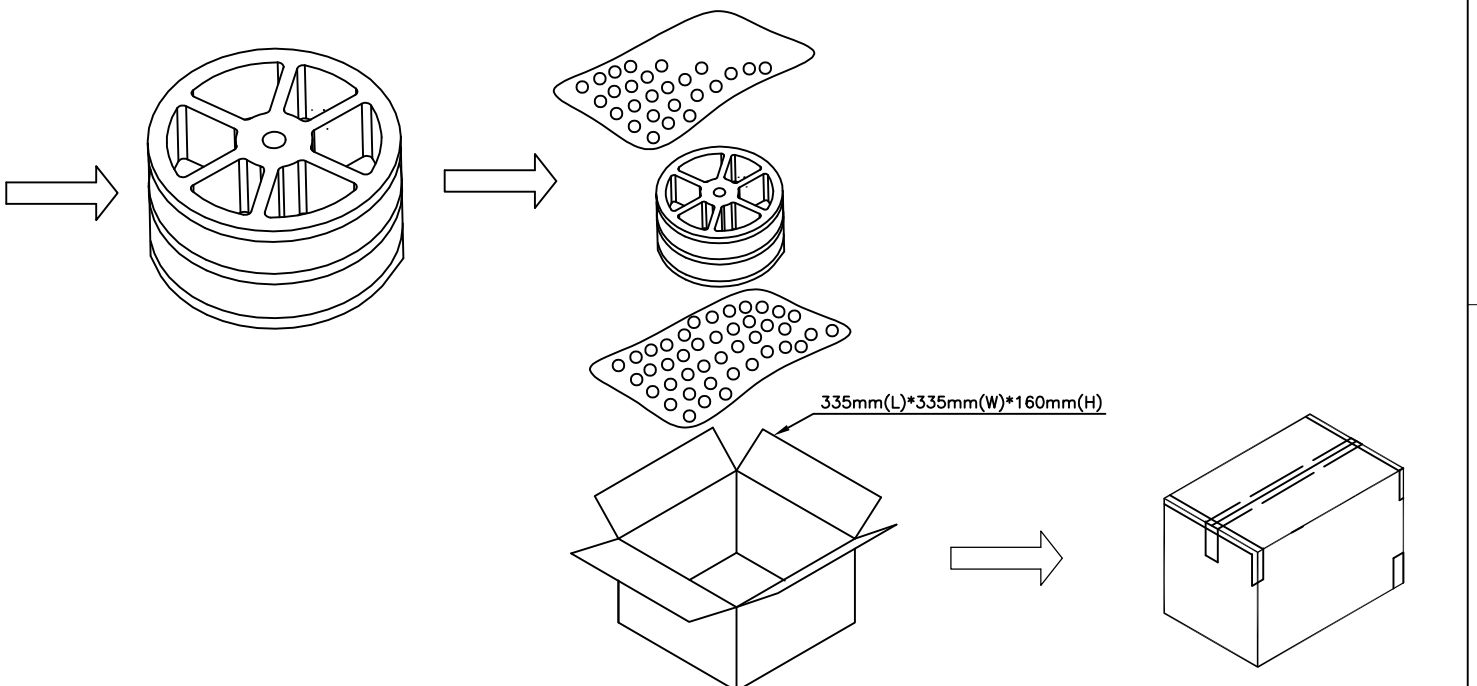

DIM B	DIM A (REEL WIDTH)	PCS/CARTON	PCS/REEL	No. of Contacts	PART NO.	
OBSOLETE	61	56	1,800	900	40	9-1734516-0
OBSOLETE			1,800	900	38	8-1734516-8
OBSOLETE			1,800	900	36	8-1734516-6
OBSOLETE			1,800	900	34	8-1734516-4
OBSOLETE			1,800	900	32	8-1734516-2
			1,800	900	30	8-1734516-0
OBSOLETE			1,800	900	28	7-1734516-8
OBSOLETE			1,800	900	26	7-1734516-6
OBSOLETE	49	44	2,700	900	24	7-1734516-4
OBSOLETE			2,700	900	22	7-1734516-2
OBSOLETE			2,700	900	20	7-1734516-0
OBSOLETE			2,700	900	18	6-1734516-8
OBSOLETE			2,700	900	16	6-1734516-6
OBSOLETE			2,700	900	14	6-1734516-4
OBSOLETE	29	24	2,700	900	12	6-1734516-2
			2,700	900	10	6-1734516-0
			2,700	900	8	5-1734516-8
			1,800	900	40	4-1734516-0
OBSOLETE	61	56	1,800	900	38	3-1734516-8
OBSOLETE			1,800	900	36	3-1734516-6
OBSOLETE			1,800	900	34	3-1734516-4
OBSOLETE			1,800	900	32	3-1734516-2
OBSOLETE			1,800	900	30	3-1734516-0
OBSOLETE			1,800	900	28	2-1734516-8
			1,800	900	26	2-1734516-6
OBSOLETE	49	44	2,700	900	24	2-1734516-4
OBSOLETE			2,700	900	22	2-1734516-2
OBSOLETE			2,700	900	20	2-1734516-0
OBSOLETE			2,700	900	18	1-1734516-8
OBSOLETE			2,700	900	16	1-1734516-6
OBSOLETE			2,700	900	14	1-1734516-4
OBSOLETE	29	24	2,700	900	12	1-1734516-2
OBSOLETE			2,700	900	10	1-1734516-0
OBSOLETE			2,700	900	8	0-1734516-8

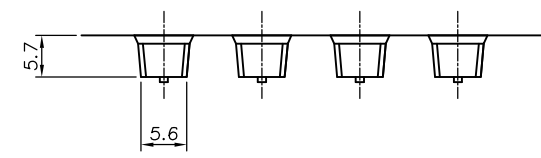

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DWN	07APR2006	 TE Connectivity			
mm		CHK	07APR2006				
		APVD	07APR2006				
		NAME	W.J.KE				
		PRODUCT SPEC	108-57197	AMPMODU 2.0mm PITCH, REC CONN, SMT, VERTICAL MOUNT			
		APPLICATION SPEC	-	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
MATERIAL	FINISH	WEIGHT	-	A3	00779	C-1734516	-
SEE SHEET 1	SEE SHEET 1	CUSTOMER DRAWING		SCALE	SHEET	REV	
				5:1	2 OF 2	A4	

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)