
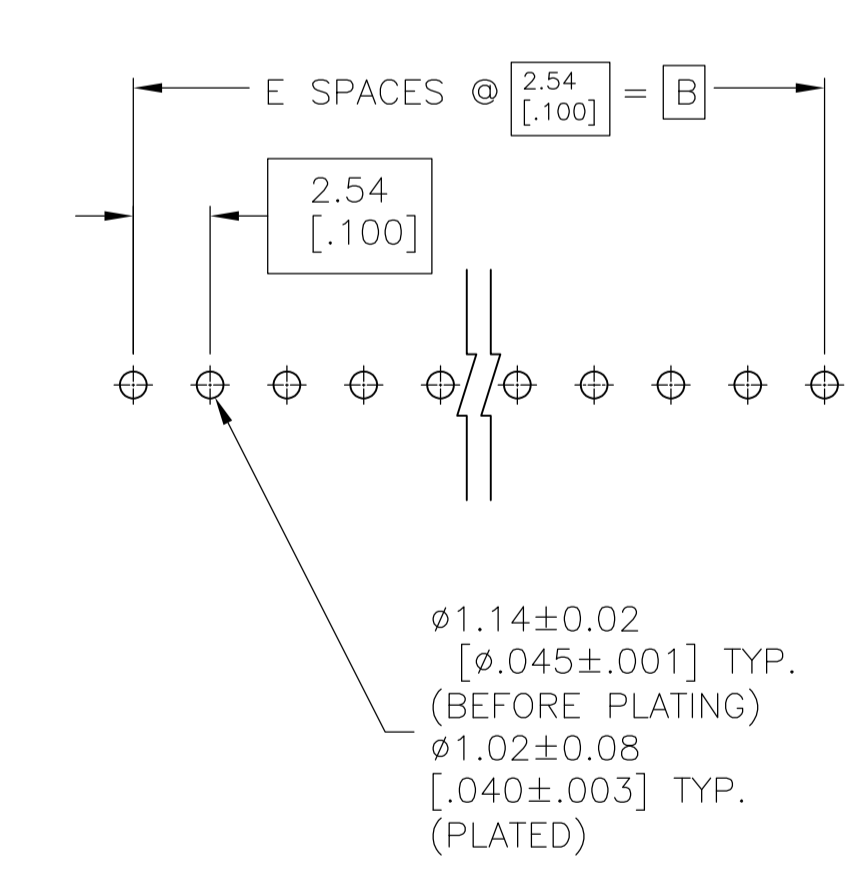


REVISONS		DATE	BY	APPV
NO.	DESCRIPTION			
D	REVISED PER ECO-14-000260	05JUL2014	NK	MM

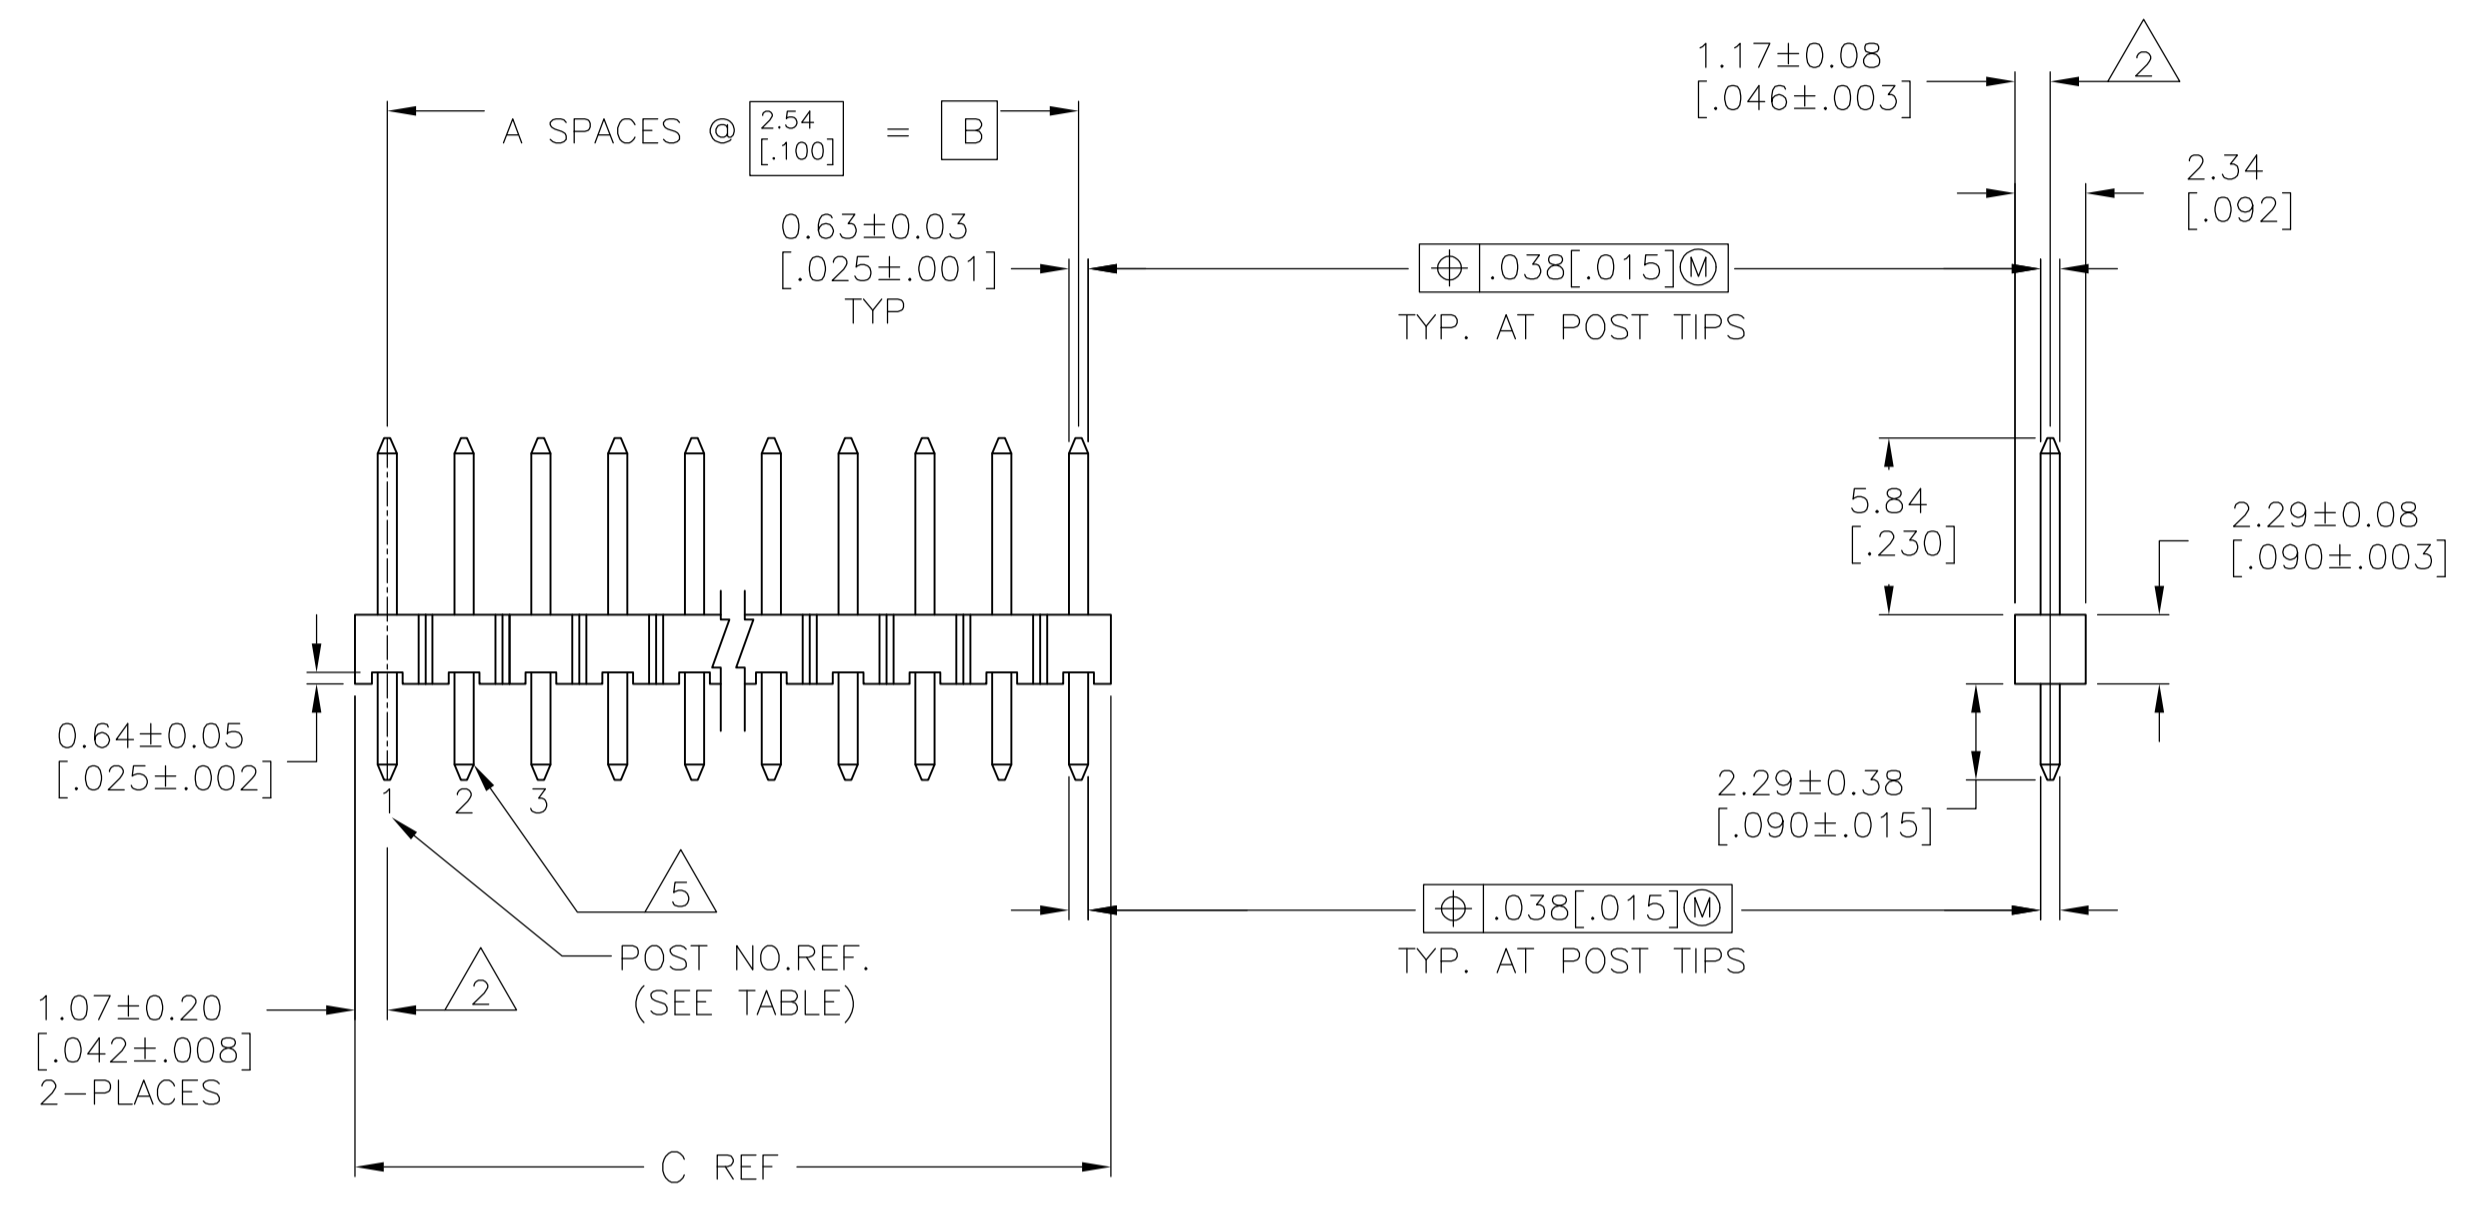

RECOMMENDED HOLE LAYOUT

- 1 TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADERS ARE HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD.
- 2 THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND THE HOUSING.
- 3 MATERIAL - HOUSING: FLAME RETARDANT THERMOPLASTIC, COLOR - BLACK. POSTS: COPPER ALLOY
- 4 0.000127 [.000005] GOLD IN CONTACT AREA, 0.00254-0.00508 [.000100-.000200] MATTE TIN-LEAD, ON SOLDER TAIL, ALL OVER 0.00127 [.000005] NICKEL.
- 5 RETENTION FEATURES ON SOLDER TAILS, LOCATED AT MANUFACTURERS OPTION.
- 6 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

LOC	DIST	P	LTR	DESCRIPTION	DATE	BY	APPV
		D	REVISED PER	ECO-14-000260	05JUL2014	NK	MM

LOC	DIST	P	LTR	DESCRIPTION	DATE	BY	APPV
101.19	99.06	39	40	3-146425-8			
3.984	3.900						
98.65	96.52	38	39	3-146425-7			
3.884	3.800						
96.11	93.98	37	38	3-146425-6			
3.784	3.700						
93.57	91.44	36	37	3-146425-5			
3.684	3.600						
91.03	88.90	35	36	3-146425-4			
3.584	3.500						
88.49	86.36	34	35	3-146425-3			
3.484	3.400						
85.95	83.82	33	34	3-146425-2			
3.384	3.300						
83.41	81.28	32	33	3-146425-1			
3.284	3.200						
80.87	78.74	31	32	3-146425-0			
3.184	3.100						
78.33	76.20	30	31	2-146425-9			
3.084	3.000						
75.79	73.66	29	30	2-146425-8			
2.984	2.900						
73.25	71.12	28	29	2-146425-7			
2.884	2.800						
70.71	68.58	27	28	2-146425-6			
2.784	2.700						
68.17	66.04	26	27	2-146425-5			
2.684	2.600						
65.63	63.5	25	26	2-146425-4			
2.584	2.500						
63.09	60.96	24	25	2-146425-3			
2.484	2.400						
60.55	58.42	23	24	2-146425-2			
2.384	2.300						
58.01	55.88	22	23	2-146425-1			
2.284	2.200						
55.47	53.34	21	22	2-146425-0			
2.184	2.100						
52.93	50.80	20	21	1-146425-9			
2.084	2.000						
50.39	48.26	19	20	1-146425-8			
1.984	1.900						
47.85	45.72	18	19	1-146425-7			
1.884	1.800						
45.31	43.18	17	18	1-146425-6			
1.784	1.700						
42.77	40.64	16	17	1-146425-5			
1.684	1.600						
40.23	38.10	15	16	1-146425-4			
1.584	1.500						
37.69	35.56	14	15	1-146425-3			
1.484	1.400						
35.15	33.02	13	14	1-146425-2			
1.384	1.300						
32.61	30.48	12	13	1-146425-1			
1.284	1.200						
30.07	27.94	11	12	1-146425-0			
1.184	1.100						
27.53	25.40	10	11	146425-9			
1.084	1.000						
24.99	22.86	9	10	146425-8			
.984	.900						
22.45	20.32	8	9	146425-7			
.884	.800						
19.91	17.78	7	8	146425-6			
.784	.700						
17.37	15.24	6	7	146425-5			
.684	.600						
14.83	12.70	5	6	146425-4			
.584	.500						
12.29	10.16	4	5	146425-3			
.484	.400						
9.75	7.62	3	4	146425-2			
.384	.300						
7.21	5.08	2	3	146425-1			
.284	.200						

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIN T. HOFFMAN 9/7/95  
 CHK G. DUBNICZKI 10/3/95  
 APPV G. DUBNICZKI 10/3/95

STE TE Connectivity

PRODUCT SPEC NAME: HEADER ASSEMBLY, MOD II, BREAKAWAY, SINGLE ROW, .100 CL, VERTICAL, .025 SQ. POSTS, WITH RETENTION FEATURE

APPLICATION SPEC SIZE: A1 CAGE CODE: 00779 DRAWING NO: 146425

MATERIAL: POSTS FINISH: WEIGHT: CUSTOMER DRAWING SCALE: 4:1 SHEET 1 OF 1 REV D

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)