

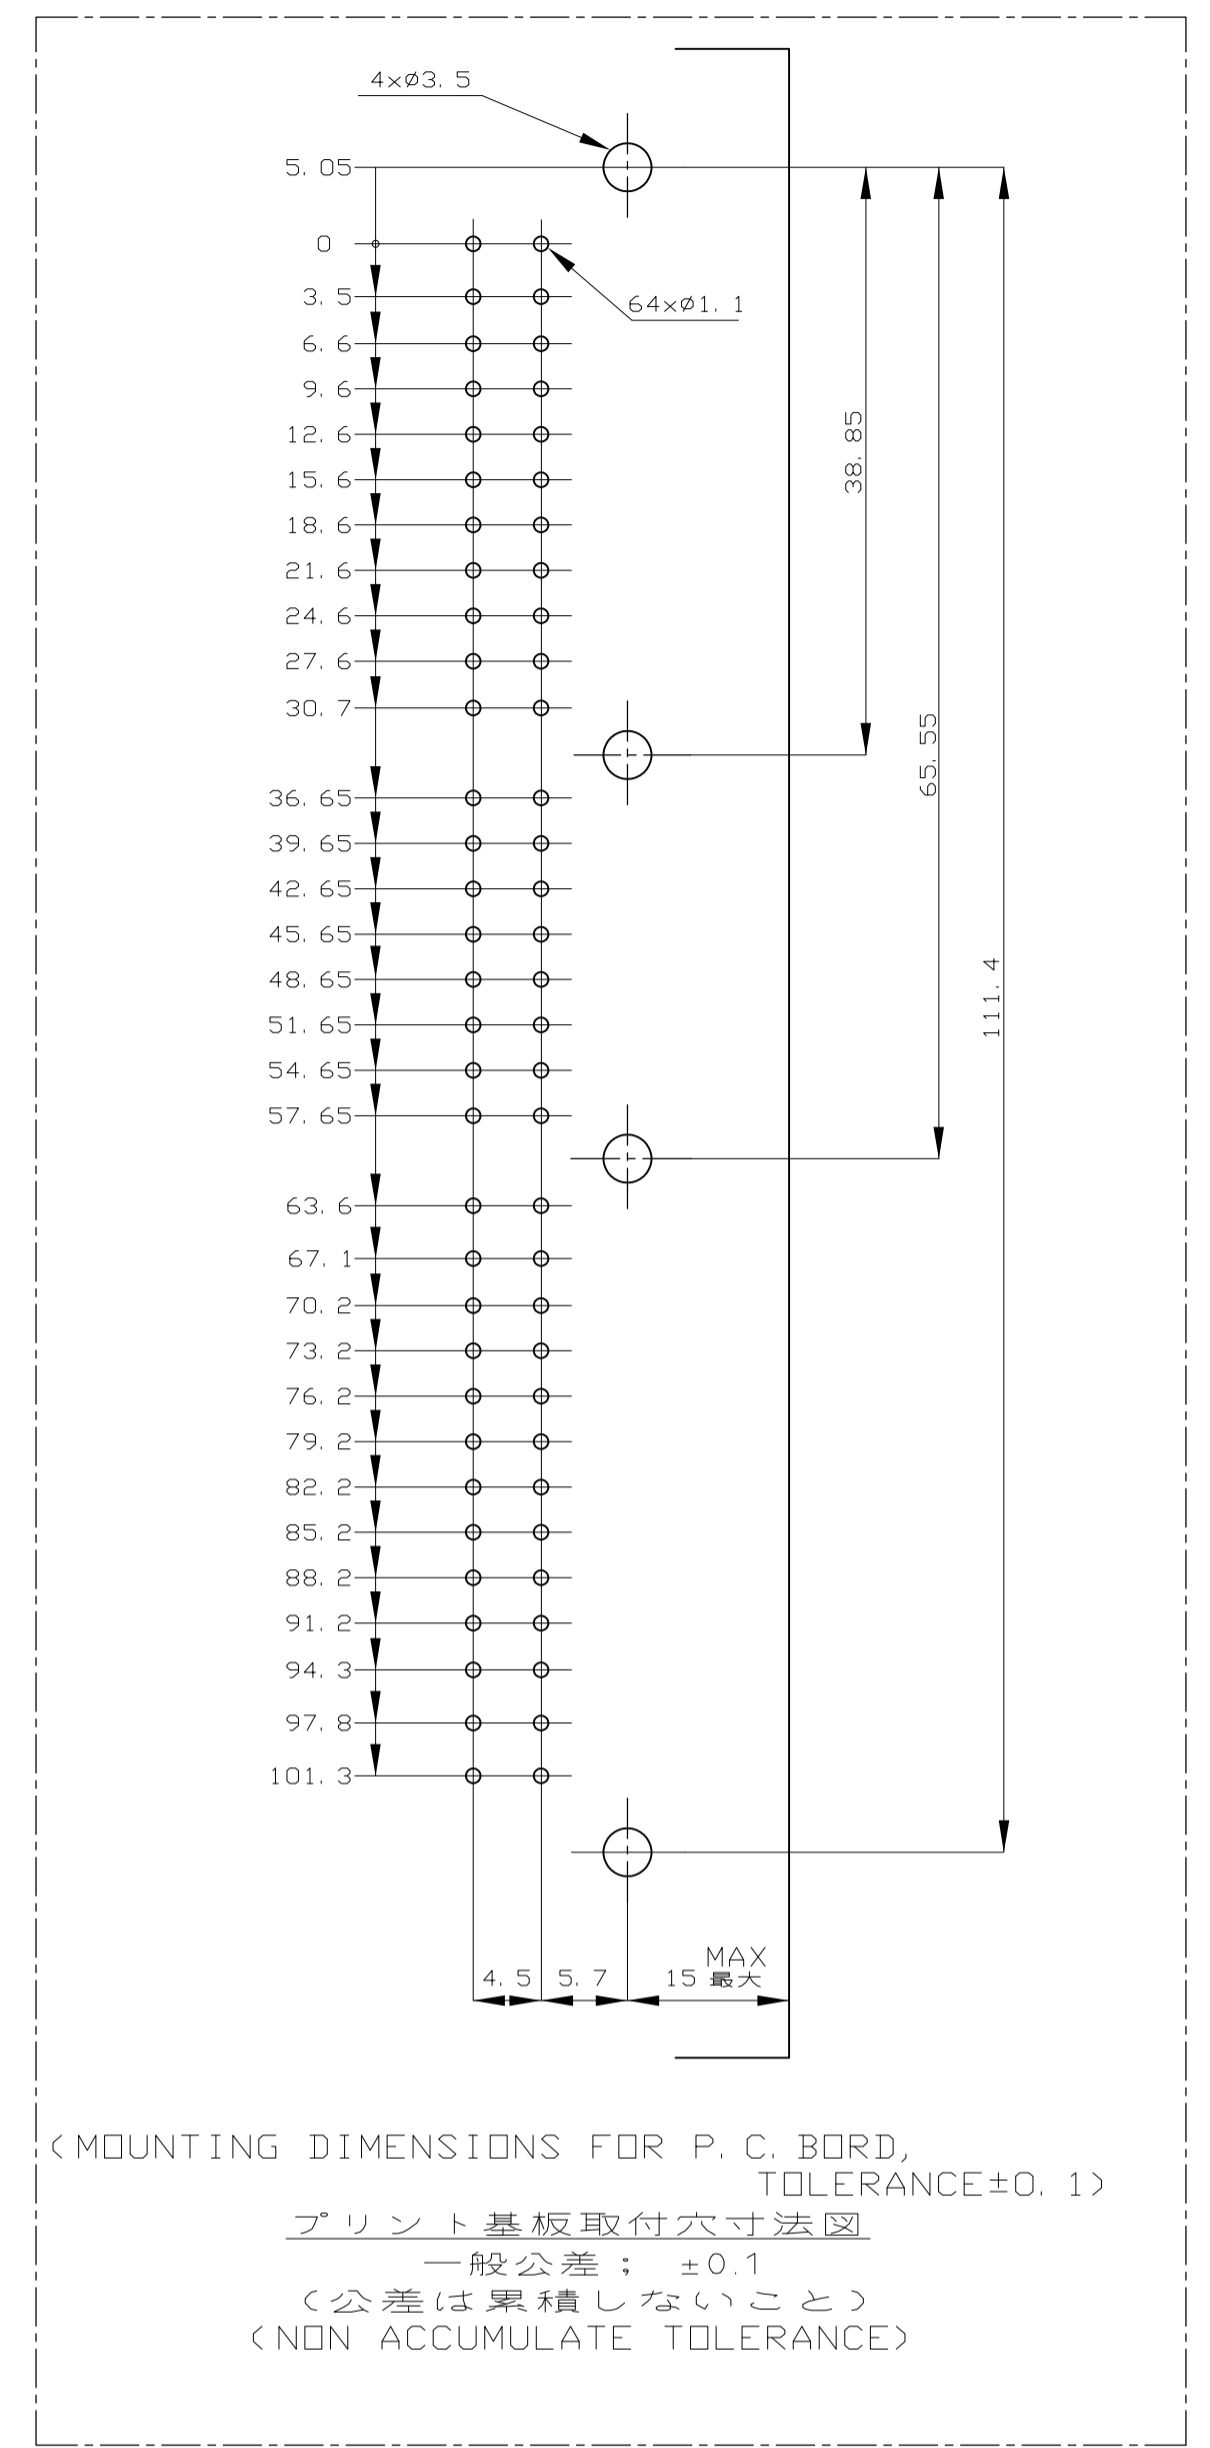
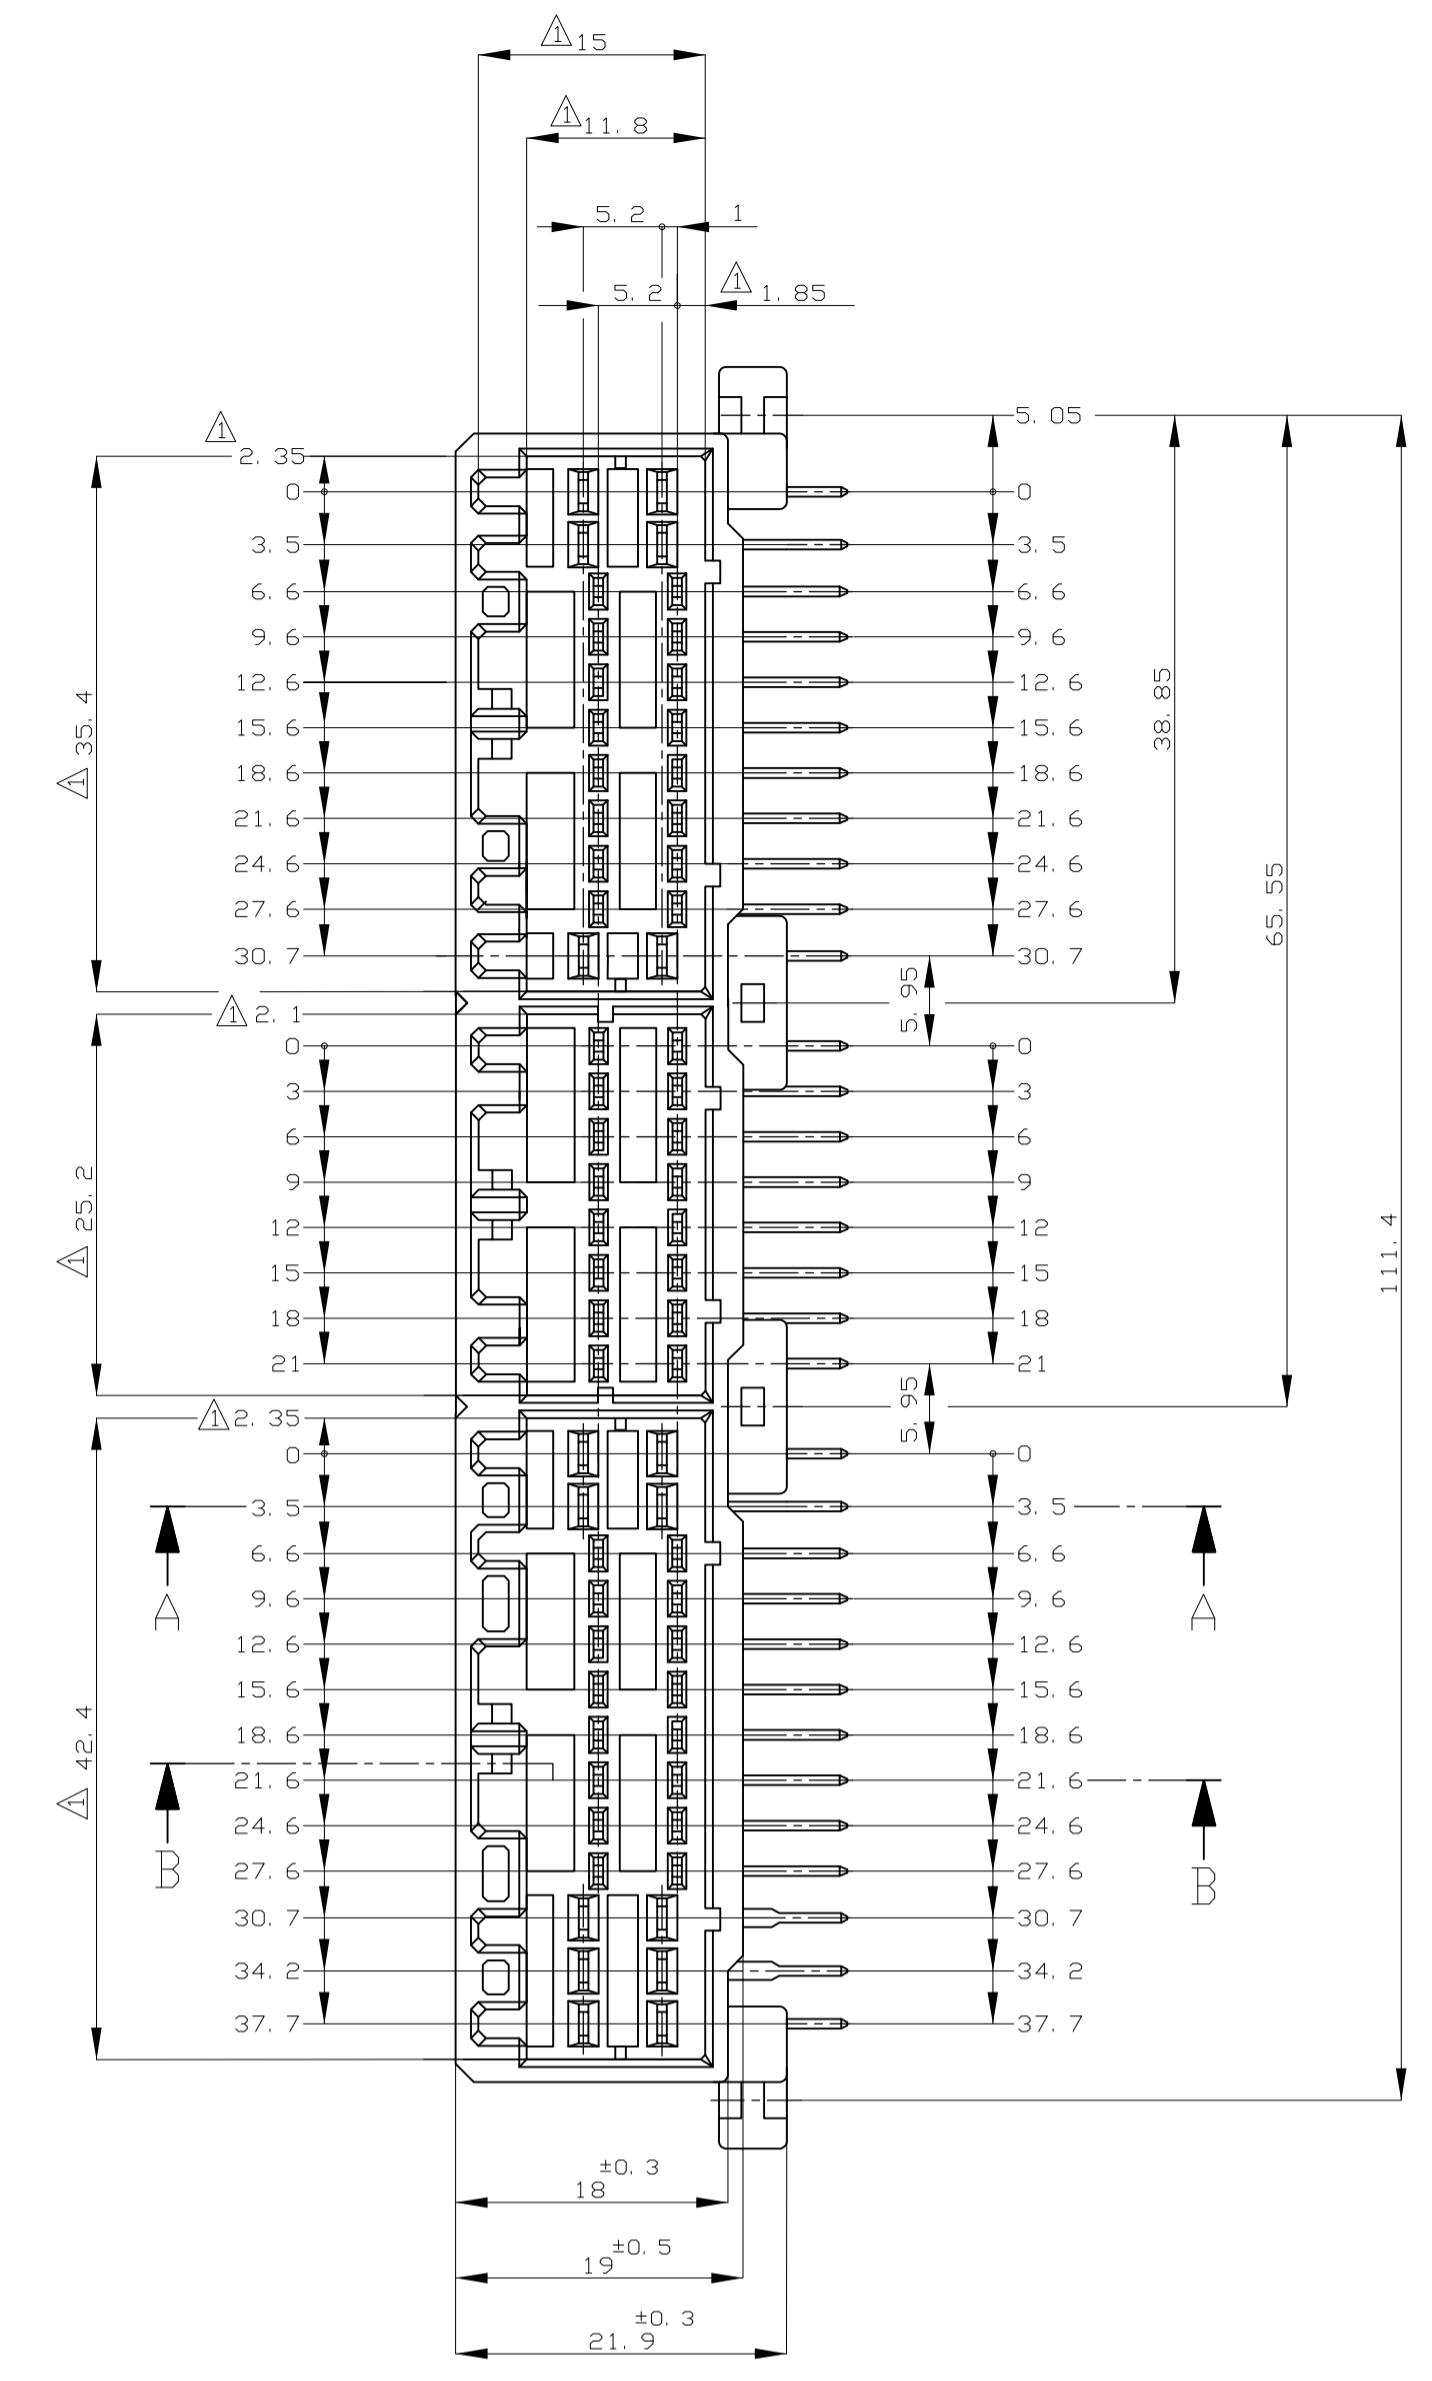
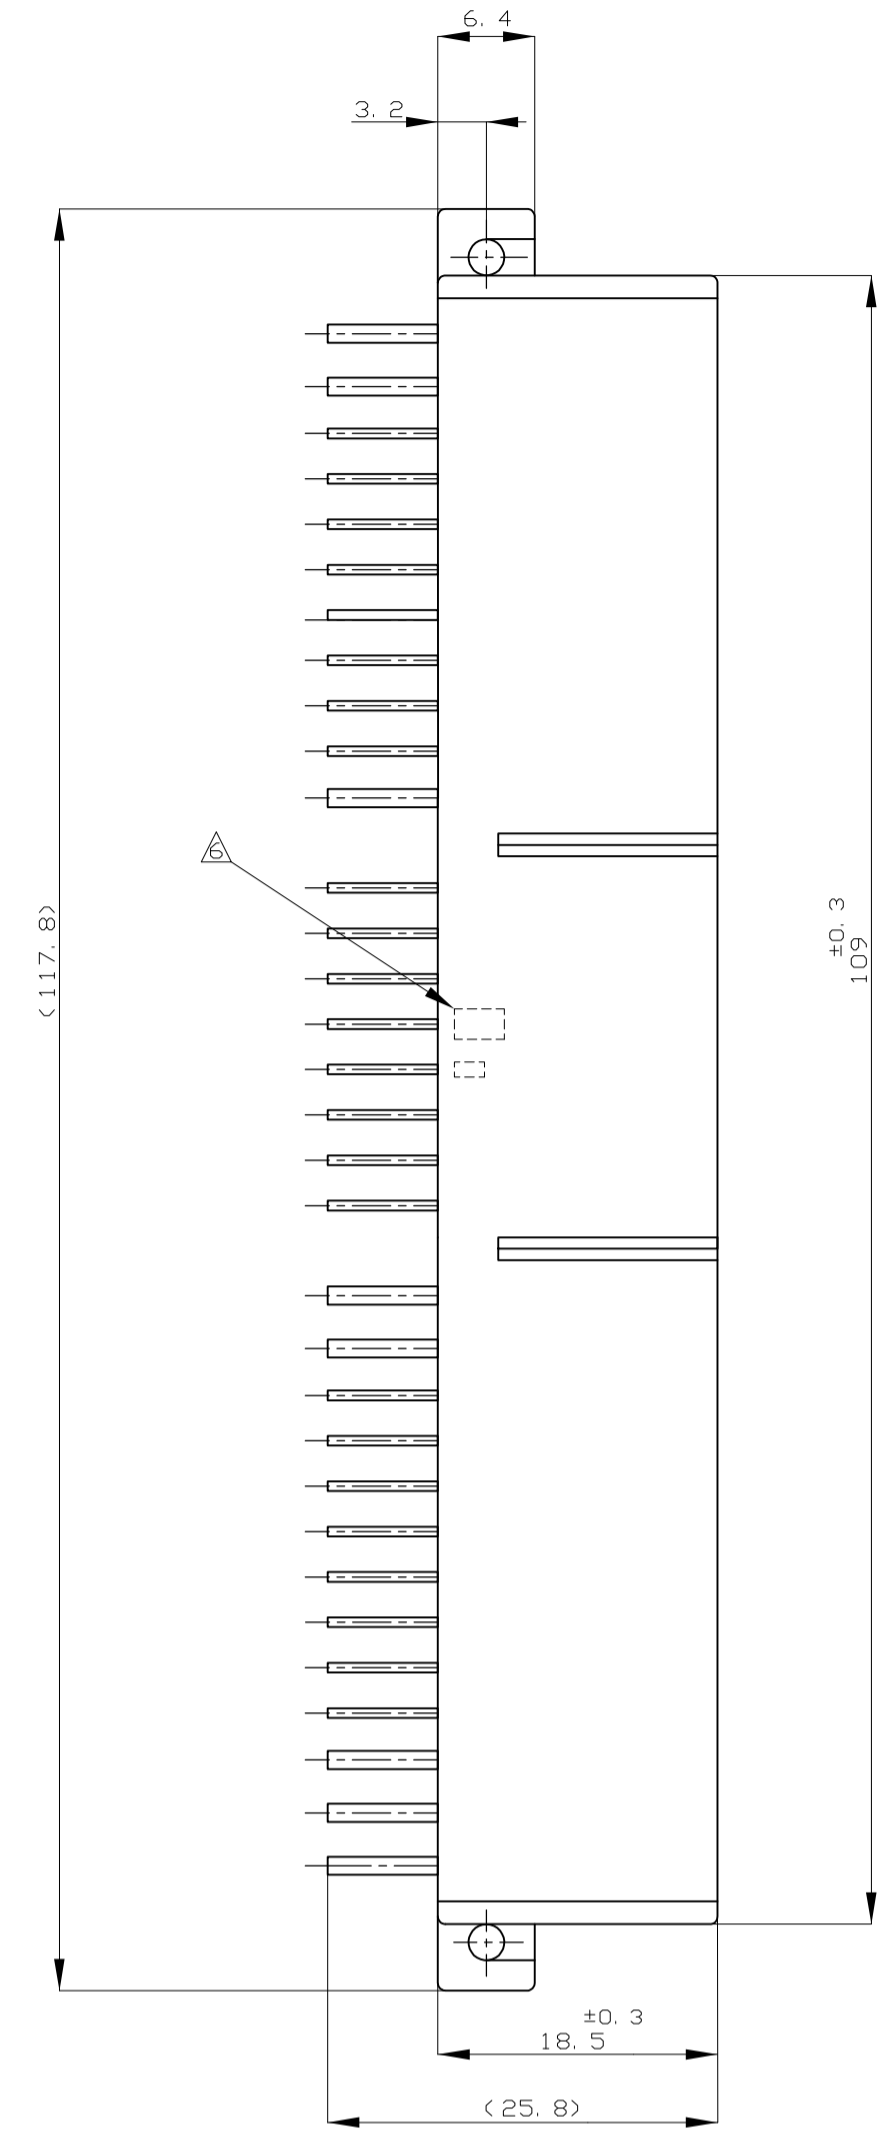


REVISIONS				
REV	DATE	BY	CHK	APPV
D7	REVISED	ECR-16-003344	25OCT2016	KF HY

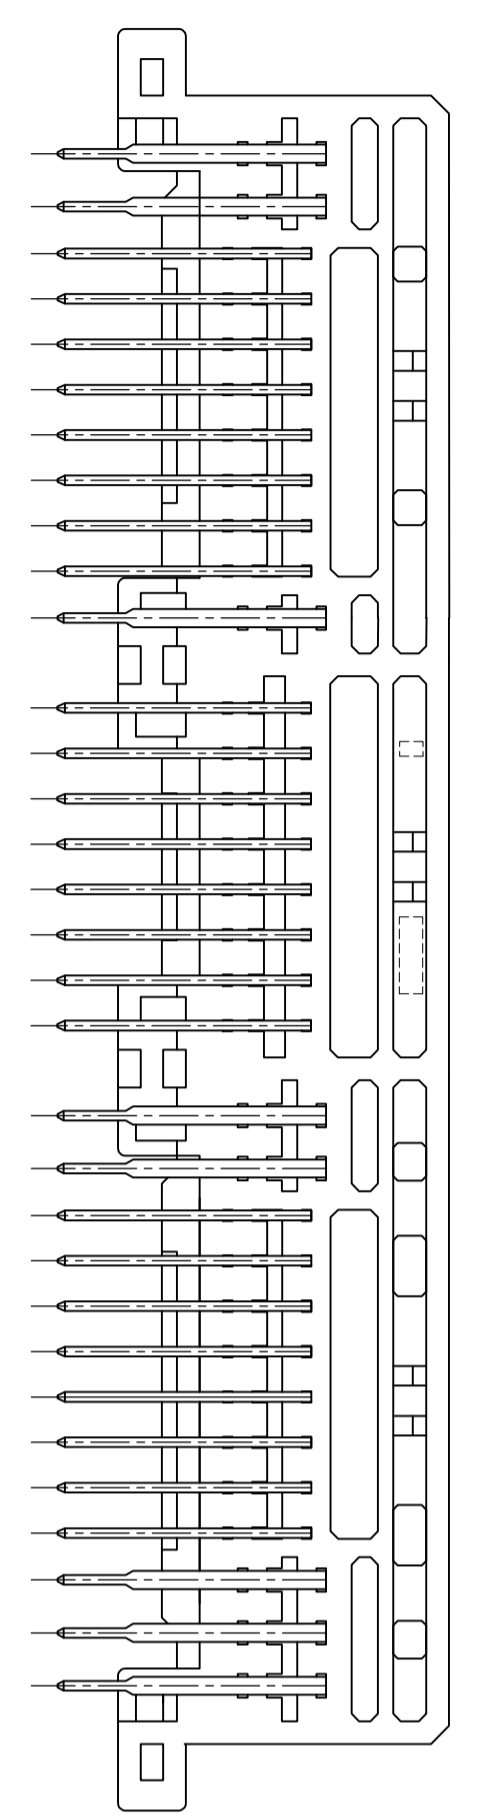

(MOUNTING DIMENSIONS FOR P. C. BOARD, TOLERANCE±0.1)  
 プリント基板取付寸法図  
 一般公差: ±0.1  
 <公差は累積しないこと>  
 (NON ACCUMULATE TOLERANCE)

- NOTES
- △ MUST BE KEPT BETWEEN [X] AND 2
  - 2 THE MATING PLUG HSG. PART NUMBER; 174516, 174515, 174514, 917992, 917989, 917981
  - 3 RECOMMENDED MOUNTING SCREW; 3mm DIA, 6mm LENGTH (MAX.) PAN HEAD, CLASS 2 TAPPING SCREW SPECIFIED IN JIS B1115, B1122
  - < TIGHTENING TORQUE; 0.4N.m (4Kg-cm) MAX. >
  - 4 APPLICABLE PRODUCT SPEC NO. 108-5280, 108-5342
  - △ CIRCUI NUMBER; SEE FIG. 1
  - POWER CIRCUIT NO. ① ~ ⑬
  - SIGNAL CIRCUIT NO. ⑭ ~ ⑥④
  - △ MARKING FOR DISCERNMENT OF THE CONTACT FINISH

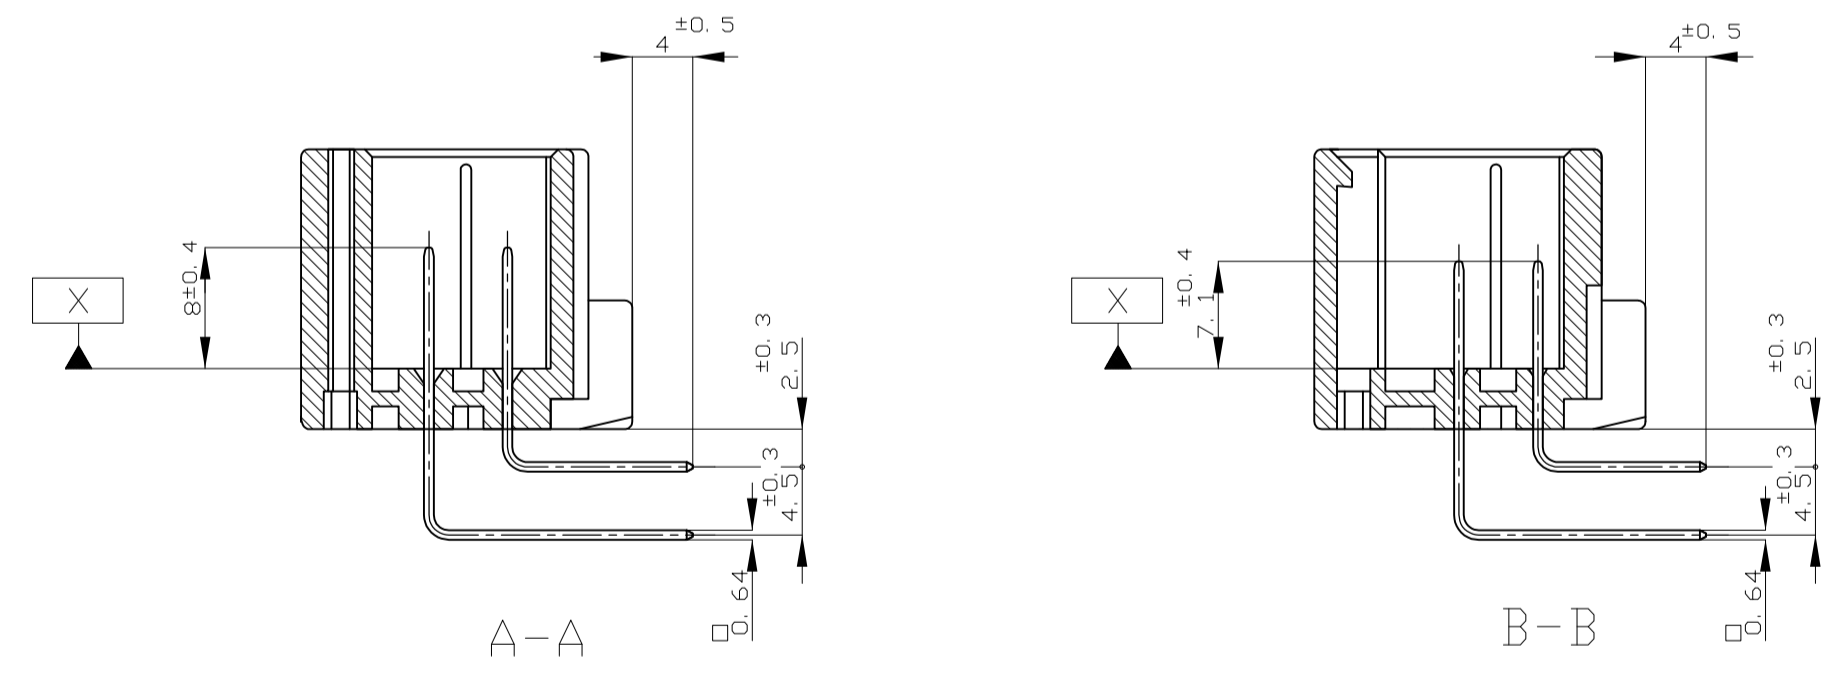

- 注記
- △ [X] 面から2mmの範囲で測定
  - 2. 嵌合相手ハウジング型 174516, 174515, 174514, 917992, 917989, 917981
  - 3. 推奨取付ねじ; JIS B1115, B1122 タッピンねじ, なべ2種  
 呼び径3, 長さ6mm以下 (締付トルク: 0.4N.m(4Kg-cm)以下)
  - 4. 適用製品規格番号; 108-5280, 108-5342
  - △ 回路番号; FIG.1参照のこと  
 パワー回路: ① ~ ⑬  
 シグナル回路: ⑭ ~ ⑥④
  - △ コンタクト仕上識別マーク

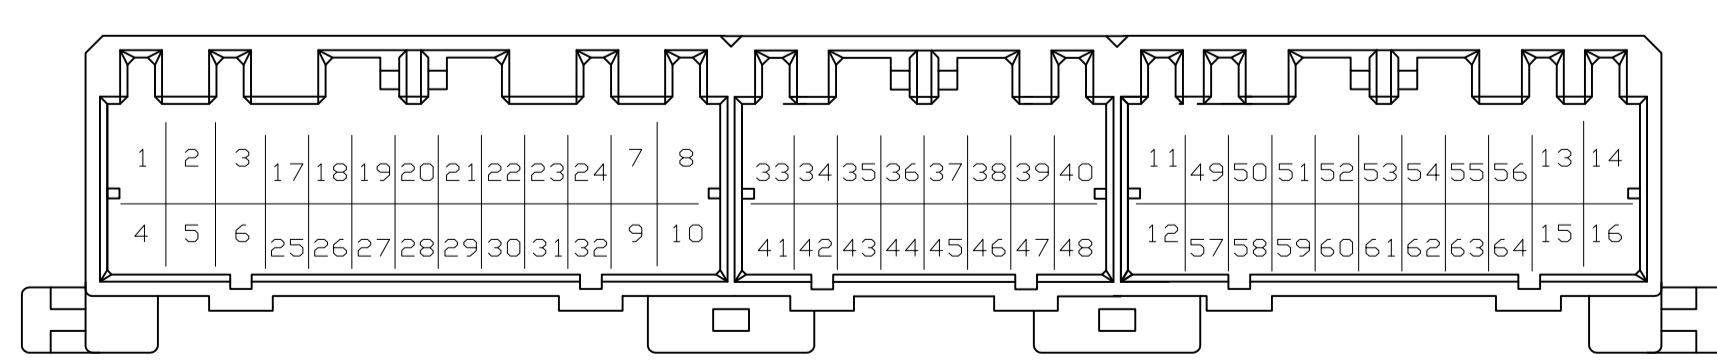


FIG.1

NO.	MARKING	NO CONTACT CIRCUIT NO.	FINISH OF CONTACT	POWER CIRCUIT NO.	SIGNAL CIRCUIT NO.	HOUSING COLOR	P/N
59	---	---	PRE-TIN x 54 SELECTIVE TIN (MATTE)   SELECTIVE GOLD x 10	⑭ - ⑮	⑦ ~ ⑥④	GRAY 灰色	9-5178764-6
55	---	---	PRE-TIN x 40 SELECTIVE TIN (MATTE)   SELECTIVE GOLD x 24	---	⑦ - ⑥④	YELLOW 黄色	5-5178764-7
54	---	---	PRE-TIN x 42 SELECTIVE TIN (MATTE)   SELECTIVE GOLD x 22	---	⑦ - ⑥④	YELLOW 黄色	4-5178764-7
53	---	---	PRE-TIN x 18 SELECTIVE TIN (MATTE)   SELECTIVE GOLD x 52	⑦ - ⑮	⑦ ~ ⑥④	GRAY 灰色	3-5178764-6
52	---	---	PRE-TIN x 16 SELECTIVE TIN (MATTE)   SELECTIVE GOLD x 48	---	⑦ ~ ⑥④	GRAY 灰色	2-5178764-6
52	---	---	PRE-TIN x 16 SELECTIVE TIN (MATTE)   SELECTIVE GOLD x 48	---	⑦ ~ ⑥④	NATURAL 自然色	2-5178764-1
51	---	---	PRE-TIN x 16 SELECTIVE TIN (MATTE)   SELECTIVE GOLD x 48	① - ⑮	⑦ ~ ⑥④	GRAY 灰色	1-5178764-6
8	---	---	PRE-TIN x 52 TIN-LEAD   SELECTIVE GOLD x 12	---	③③③③-③③③③③③③③	YELLOW 黄色	8-178764-7
7	---	---	PRE-TIN x 44 TIN-LEAD   SELECTIVE GOLD x 16	---	③③③③-③③③③	YELLOW 黄色	7-178764-7
6	---	---	PRE-TIN x 55 TIN-LEAD   SELECTIVE GOLD x 9	⑭ - ⑮	⑦ ~ ⑥④	NATURAL 自然色	6-178764-1
5	---	---	PRE-TIN x 40 TIN-LEAD   SELECTIVE GOLD x 24	---	⑦ - ⑥④	YELLOW 黄色	5-178764-7
4	---	---	PRE-TIN x 42 TIN-LEAD   SELECTIVE GOLD x 22	---	⑦ - ⑥④	YELLOW 黄色	4-178764-7
3	---	---	PRE-TIN x 18 TIN-LEAD   SELECTIVE GOLD x 52	⑦ - ⑮	⑦ ~ ⑥④	YELLOW 黄色	3-178764-7
3	---	---	PRE-TIN x 12 TIN-LEAD   SELECTIVE GOLD x 52	⑦ - ⑮	⑦ ~ ⑥④	GRAY 灰色	3-178764-6
2	---	---	PRE-TIN x 16 TIN-LEAD   SELECTIVE GOLD x 48	---	⑦ ~ ⑥④	YELLOW 黄色	2-178764-7
2	---	---	PRE-TIN x 16 TIN-LEAD   SELECTIVE GOLD x 48	---	⑦ ~ ⑥④	GRAY 灰色	2-178764-6
2	---	---	PRE-TIN x 16 TIN-LEAD   SELECTIVE GOLD x 48	---	⑦ ~ ⑥④	NATURAL 自然色	2-178764-1
1	---	---	TIN-LEAD   SELECTIVE GOLD x 64	① - ⑮	⑦ ~ ⑥④	YELLOW 黄色	1-178764-7
1	---	---	TIN-LEAD   SELECTIVE GOLD x 64	① - ⑮	⑦ ~ ⑥④	GRAY 灰色	1-178764-6
0	---	---	PRE-TIN x 64	---	---	YELLOW 黄色	178764-7
A	⑬ ⑭	---	PRE-TIN x 62	---	---	NATURAL 自然色	178764-2
0	---	---	PRE-TIN x 64	---	---	NATURAL 自然色	178764-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: 単位: 寸 (mm)

TOLERANCES UNLESS OTHERWISE SPECIFIED: 公差: 寸 (mm)

MATERIAL: HOUSING: PBT; CONTACT: BRASS

FINISH: 仕上

SEE TABLE

DWG: T. SHINOHARA; CHK: K. BETSUJI; APPV: K. BETSUJI

NAME: 氏名

PRODUCT SPEC: 製品規格

APPLICATION SPEC: 取付適用規格

SIZE: A1; CODE: 00779; DRAWING NO: 178764

RESTRICTED TO: 制限

WEIGHT: 28.4 g

CUSTOMER DRAWING

SCALE: 2:1; SHEET: 1 of 1; REV: D7

STE TE Connectivity

64POS CAP HOUSING ASSY  
 .040/.070 SERIES HYBRID I/O CONN.

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)