
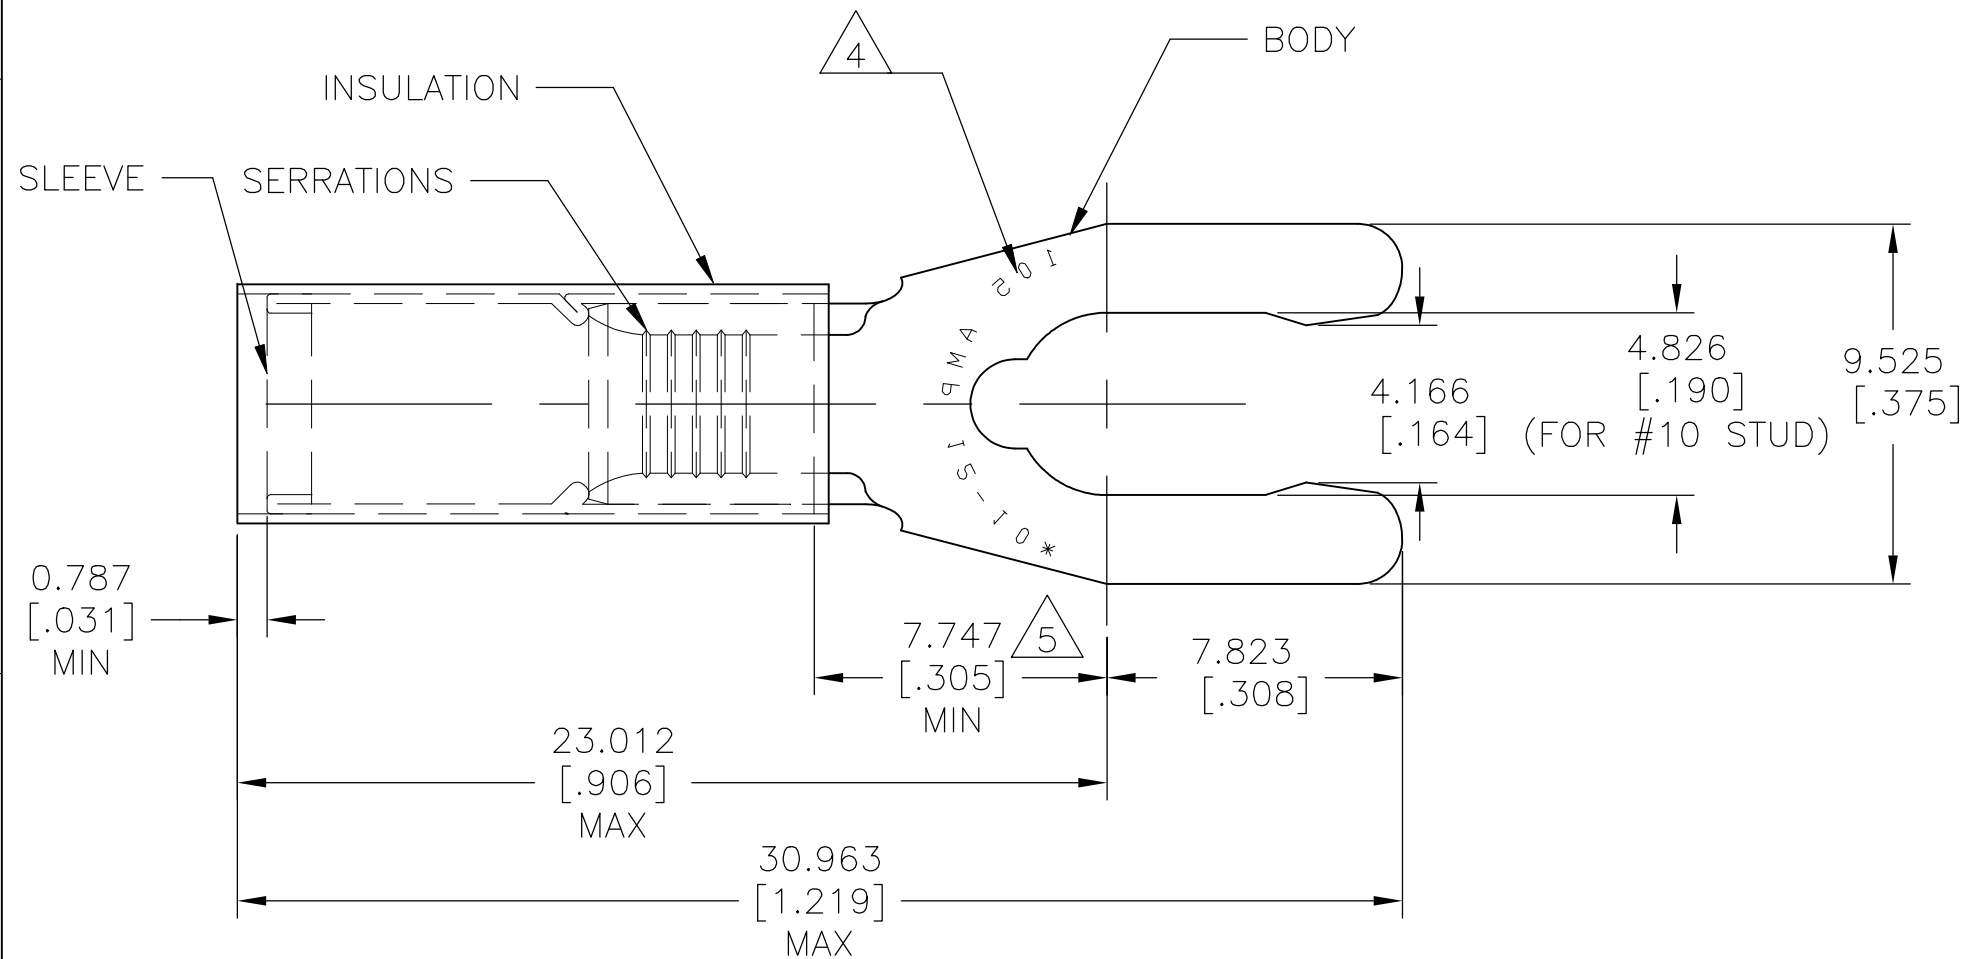


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	F1	NEW DRAWING PER ECO-11-019045	09APR12	KH	DR
	F2	REVISED PER ECO-17-008114	31MAY2018	RS	DR

AMP WIRE RANGE	 Listed FILE E13288
12-10 AWG SOLID OR STRANDED	12-10 AWG SOLID OR STRANDED



- 1 FOR WIRE INSULATION DIA:
3.810[.150] TO 6.350[.250]
- 2 NOTE DELETED
- 3 BODY MATERIAL THK: 0.991±0.051[.039±.002]
- 4 STAMP 10S AMP 12-10* APPROX AS SHOWN
- 5 APPLIES FROM EDGE OF METAL
WIRE BARREL TO CENTER OF STUD
- 6 MATERIAL:
BODY: PHOSPHOR BRONZE PER ASTM B103
SLEEVE: COPPER PER ASTM B152
INSULATION: NYLON
- 7 FINISH:
BODY & SLEEVE: TIN PLATE PER ASTM B545
INSULATION: COLOR-YELLOW

1	500	LOOSE PIECE	52432-1
	QTY	PACKAGE TYPE	PART NO

AMP INCORPORATED
 CUSTOMER SERVICE SYSTEMS

FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS
 PRODUCT INFORMATION CENTER
 1-800-522-6752

FOR APPLICATION TOOLING INFORMATION
 TOOLING ASSISTANCE CENTER
 1-800-722-1111

FOR ORDER ENTRY
 1-800-526-5142


RECOMMENDED OPERATING TEMPERATURE:
 105°C [221°F]

VOLTAGE RATING:
 300V MAX

WIRE CROSS SECTIONAL AREA RANGE:
 2.62-6.64mm² [5,180-13,100]
 SOLID OR STRANDED

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
 mm [INCHES]



TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	± -
1 PLC	± -
2 PLC	± -
3 PLC	± 0.127[.005]
4 PLC	± -
ANGLES	± 5°


MATERIAL



FINISH



DWN	KIRAN HOLAL	27MAR12
CHK	ROHDE DANIEL	27MAR12
APVD	ROHDE DANIEL	27MAR12
PRODUCT SPEC	UL 486 A-B	
APPLICATION SPEC	114-2157	
WEIGHT	CUSTOMER DRAWING	

 TE Connectivity Ltd.			
NAME WIRE TERMINAL P.I.D.G SPRING SPADE WIRE SIZE: 12-10 AWG			
SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-52432	-
SCALE 5:1		SHEET 1 OF 1	REV F2

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)