

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.


LOC	DIST	REVISIONS					
FT	0	P	LTR	DESCRIPTION	DATE	DWN	APVD
			B2	OBSOLETING PART NUMBERS 15 POSITION AND ABOVE	27MAR2015	CR	PS

**MATERIAL:**  
 HOUSING: THERMOPLASTIC PA, UL94V-0, BLACK.  
 TERMINALS: BRIGHT TIN PLATED, COPPER ALLOY.  
 SCREWS: 6-32, STEEL, ZINC PLATED W/ CLEAR CHROMATE.


**ELECTRICAL:**  
 UL CLASS C: 20A, 150V.  
 UL CLASS D: 10A, 300V.  
 CSA TYPE B: 20A, 300V.  
 CSA TYPE C: 20A, 300V.  
 CSA TYPE D: 10A, 300V.  
 CSA TYPE E: 20A, 300V.  
 WIRE RANGE: 12-22 AWG.

**MECHANICAL:**  
 OPERATING TEMP.: -40° TO +105°C.  
 RECOMMENDED TIGHTENING TORQUE: 7 IN-LBS.

- ① SCREWS BOTTOMED.
- ② PRELIMINARY PART NUMBER.
- ③ OBSOLETE PARTS.

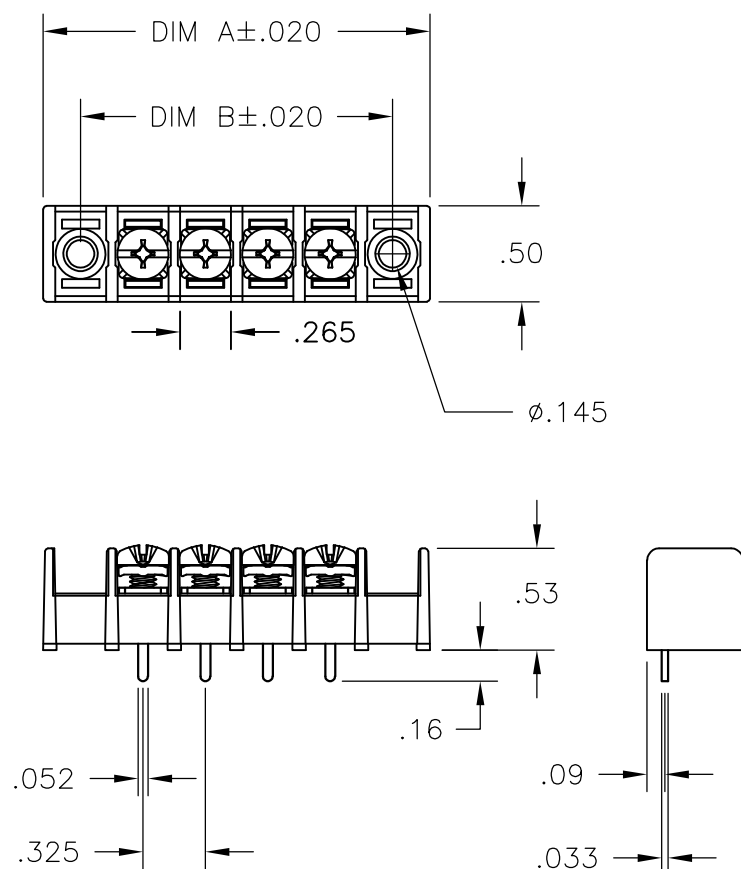

REV	DESCRIPTION	DATE	DWN	APVD		
③	OBSOLETE SEE NOTE	9.425	9.815	28	4DB-P208-28	2-1546460-8
③	OBSOLETE SEE NOTE	9.100	9.490	27	4DB-P208-27	2-1546460-7
③	OBSOLETE SEE NOTE	8.775	9.165	26	4DB-P208-26	2-1546460-6
③	OBSOLETE SEE NOTE	8.450	8.840	25	4DB-P208-25	2-1546460-5
③	OBSOLETE SEE NOTE	8.125	8.515	24	4DB-P208-24	2-1546460-4
③	OBSOLETE SEE NOTE	7.800	8.190	23	4DB-P208-23	2-1546460-3
①③	OBSOLETE SEE NOTE	7.475	7.865	22	4DB-P208-22-092	2-796988-0
③	OBSOLETE SEE NOTE	7.150	7.865	22	4DB-P208-22	6-1437667-2
③	OBSOLETE SEE NOTE	6.825	7.540	21	4DB-P208-21	2-1546460-1
③	OBSOLETE SEE NOTE	6.825	7.215	20	4DB-P208-20	2-1546460-0
③	OBSOLETE SEE NOTE	6.500	6.890	19	4DB-P208-19	1-1546460-9
③	OBSOLETE SEE NOTE	6.175	6.565	18	4DB-P208-18	1-1546460-8
③	OBSOLETE SEE NOTE	5.850	6.240	17	4DB-P208-17	1-1546460-7
③	OBSOLETE SEE NOTE	5.525	5.915	16	4DB-P208-16	1-1546460-6
③	OBSOLETE SEE NOTE	5.200	5.590	15	4DB-P208-15	1-1546460-5
		4.875	5.265	14	4DB-P208-14	1-1546460-4
		4.550	4.940	13	4DB-P208-13	1-1546460-3
		4.225	4.615	12	4DB-P208-12	1-1546460-2
		3.900	4.290	11	4DB-P208-11	1-1546460-1
		3.575	3.965	10	4DB-P208-10	1-1546460-0
		3.250	3.640	9	4DB-P208-09	1546460-9
		2.925	3.315	8	4DB-P208-08	796658-5
		2.600	2.990	7	4DB-P208-07	796658-5
		2.275	2.665	6	4DB-P208-06	796658-4
		1.950	2.340	5	4DB-P208-05	1546460-5
		1.625	2.015	4	4DB-P208-04	6-1437667-1
		1.300	1.690	3	4DB-P208-03	1546460-3
		.975	1.365	2	4DB-P208-02	6-1437667-0
COMMENTS	DIM B	DIM A	NO. OF POS.	CATALOG NUMBER	TE PART NO.	



RECOMMENDED PCB LAYOUT

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S SCHLEGEL 10/3/03	TE Connectivity			
DIMENSIONS: INCHES		CHK S YODER 10/3/03				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD S YODER 10/3/03	NAME			
0 PLC ± - 1 PLC ± - 2 PLC ± .01 3 PLC ± .005 4 PLC ± - ANGLES ± 2°		PRODUCT SPEC	4DB SERIES P208 STYLE			
MATERIAL		APPLICATION SPEC	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
FINISH		WEIGHT	A3	00779	C-6-1437667-0	-
CUSTOMER DRAWING			SCALE	SHEET	REV	
			NTS	1 OF 1	B2	

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)