



REVISIONS				
P.	LTN	DESCRIPTION	DATE	DWN APVD
7		DRAWING RELEASE	13SEP2017	ML SZ
A1		DRAWING STATUS UPDATED	01FEB2018	ML SZ
A2		RELEASE NEW PN -2	05AUG2020	ML SZ



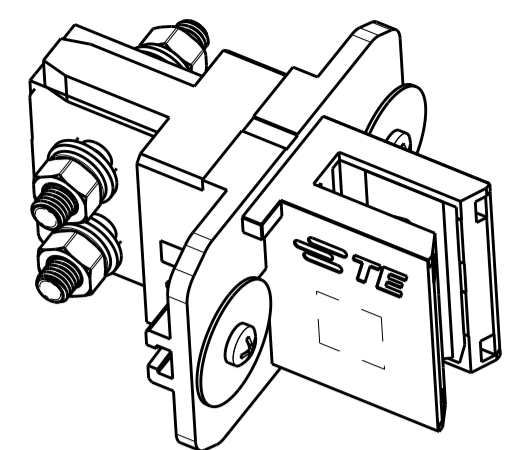


SCALE 1:1
 REFERENCE PRODUCT VIEW
 P/N: 2204866-1

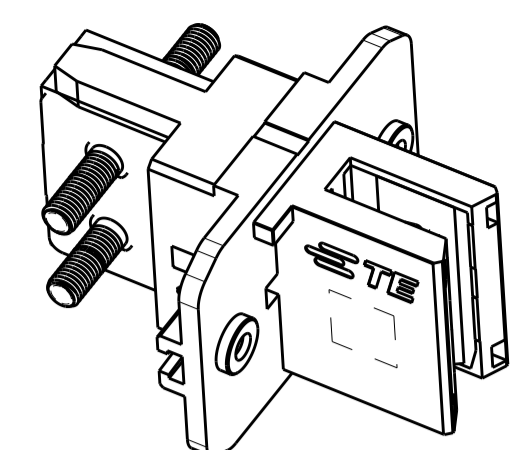

SCALE 1:1
 REFERENCE PRODUCT VIEW
 P/N: 2204866-2

- NOTES: UNLESS OTHERWISE SPECIFIED
- 1. PART NUMBER AND DATE CODE TO BE MARKED IN AREA SHOWN
 - 2. MATERIAL:
 HOUSING: THERMO PLASTIC, BLACK, UL94 V-0
 CONTACT: HIGH CONDUCTIVITY COPPER ALLOY.
 - 3. PLATING:
 SILVER PLATING OVER NICKEL BASE-PLATED ON CONTACT INTERFACE
 - 4. RECOMMENDED BUS BAR BOARD:
 MATERIAL: COPPER C10100/C10200/C11000
 PLATING: BUS BAR BOARD PLATING SHALL BE MATCHING WITH CONNECTOR PLATING.
 DETAIL SPECIFICATION PLEASE REFER TO SHEET 2 AND APPLICATION SPECIFICATION.
 - 5. PANEL BOARD:
 RECOMMENDED PANEL BOARD LAYOUT PLEASE REFER TO THE SHEET 3.
 THE SCREW M3 SHALL BE WITH LOCTITE DRI-LOCK OR EQUIVALENT IN MOUNTING AREA.
 RECOMMENDED TORQUE OF M3 SCREW : 3.9 Kgf.cm
 - 6. PCB OR BUS BAR BOARD IS RECOMMENDED TO SCREW-MOUNT WITH CONNECTOR.
 RECOMMENDED TORQUE OF M5 SCREW : 15-20 Kgf.cm
 - 7. ALL THE HARDWARE SHALL BE PACKAGED WITH CONNECTOR IN BULK. HARDWARE LIST SHOWN IN THE SHEET 2.

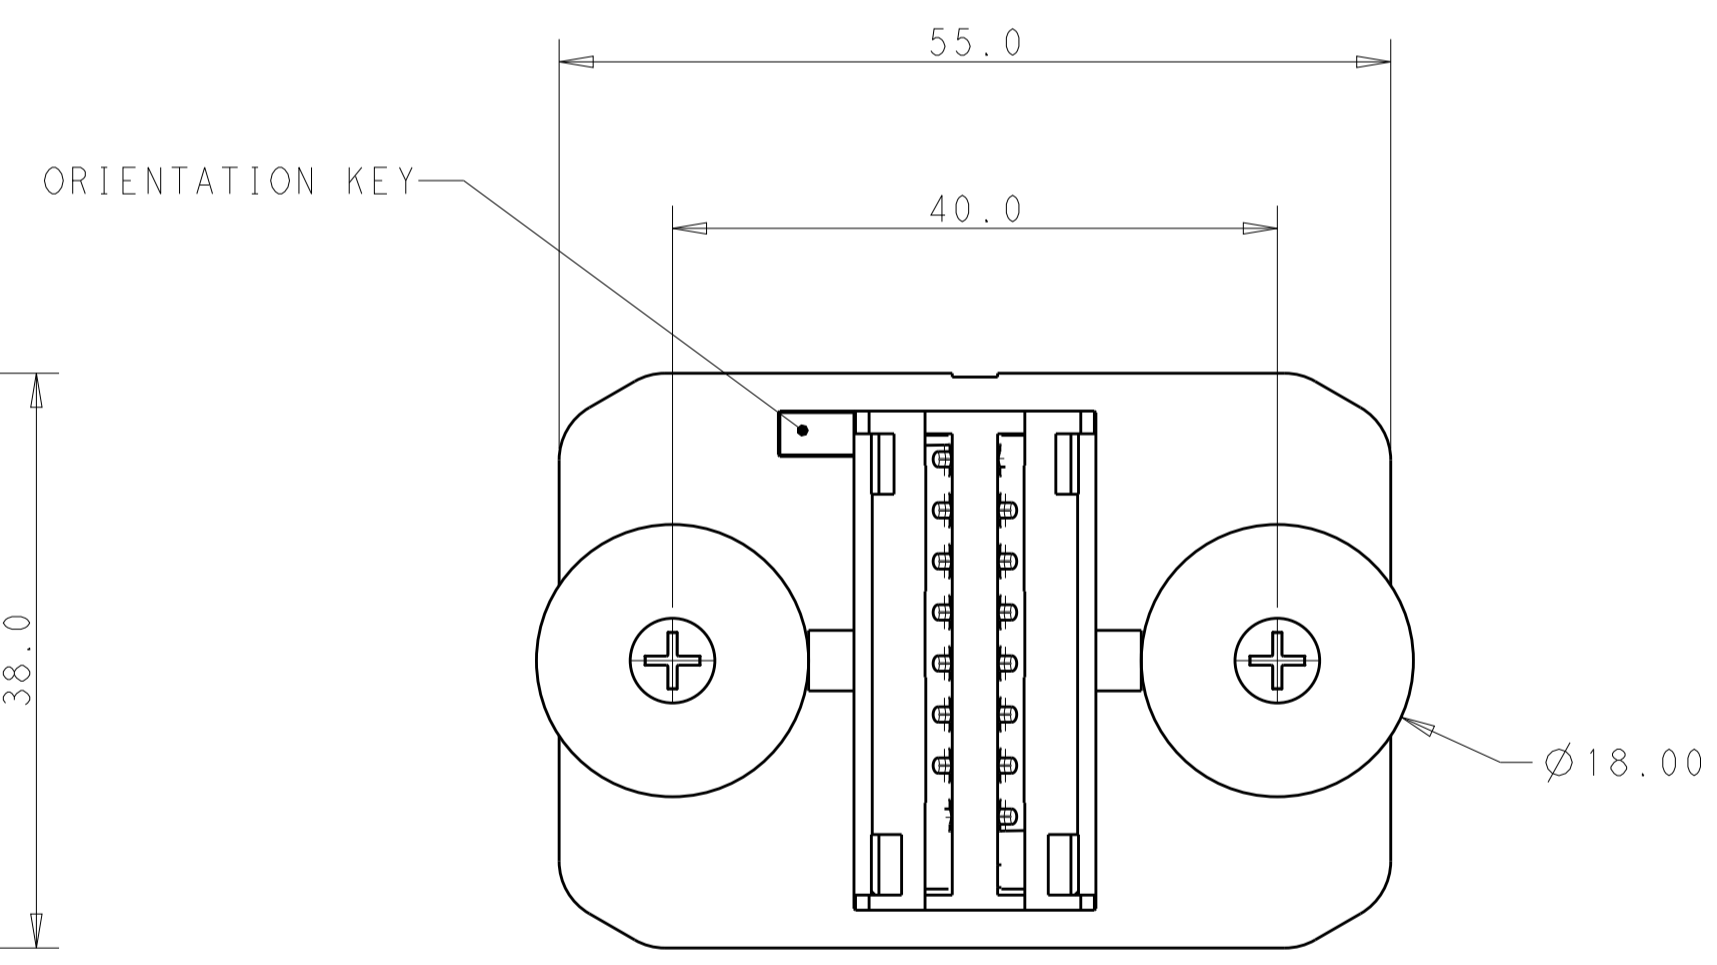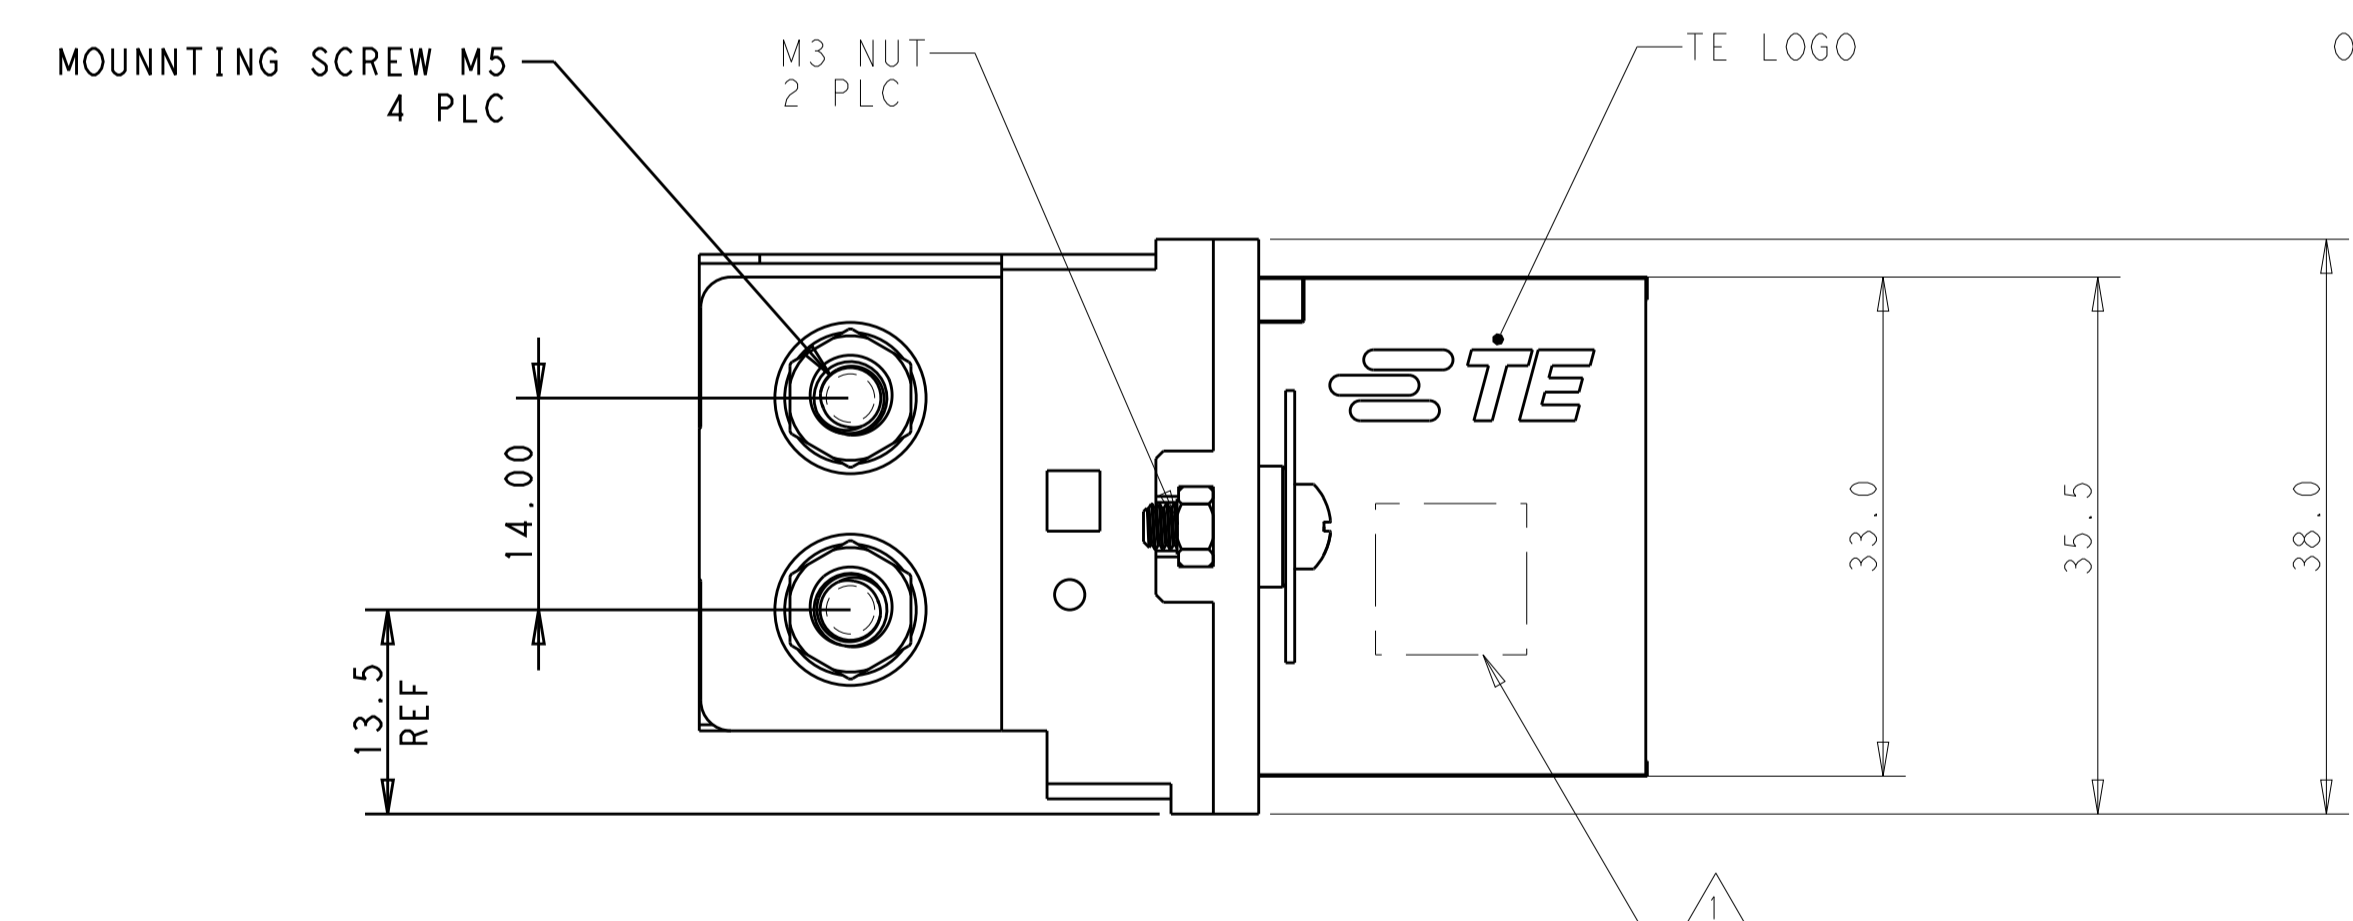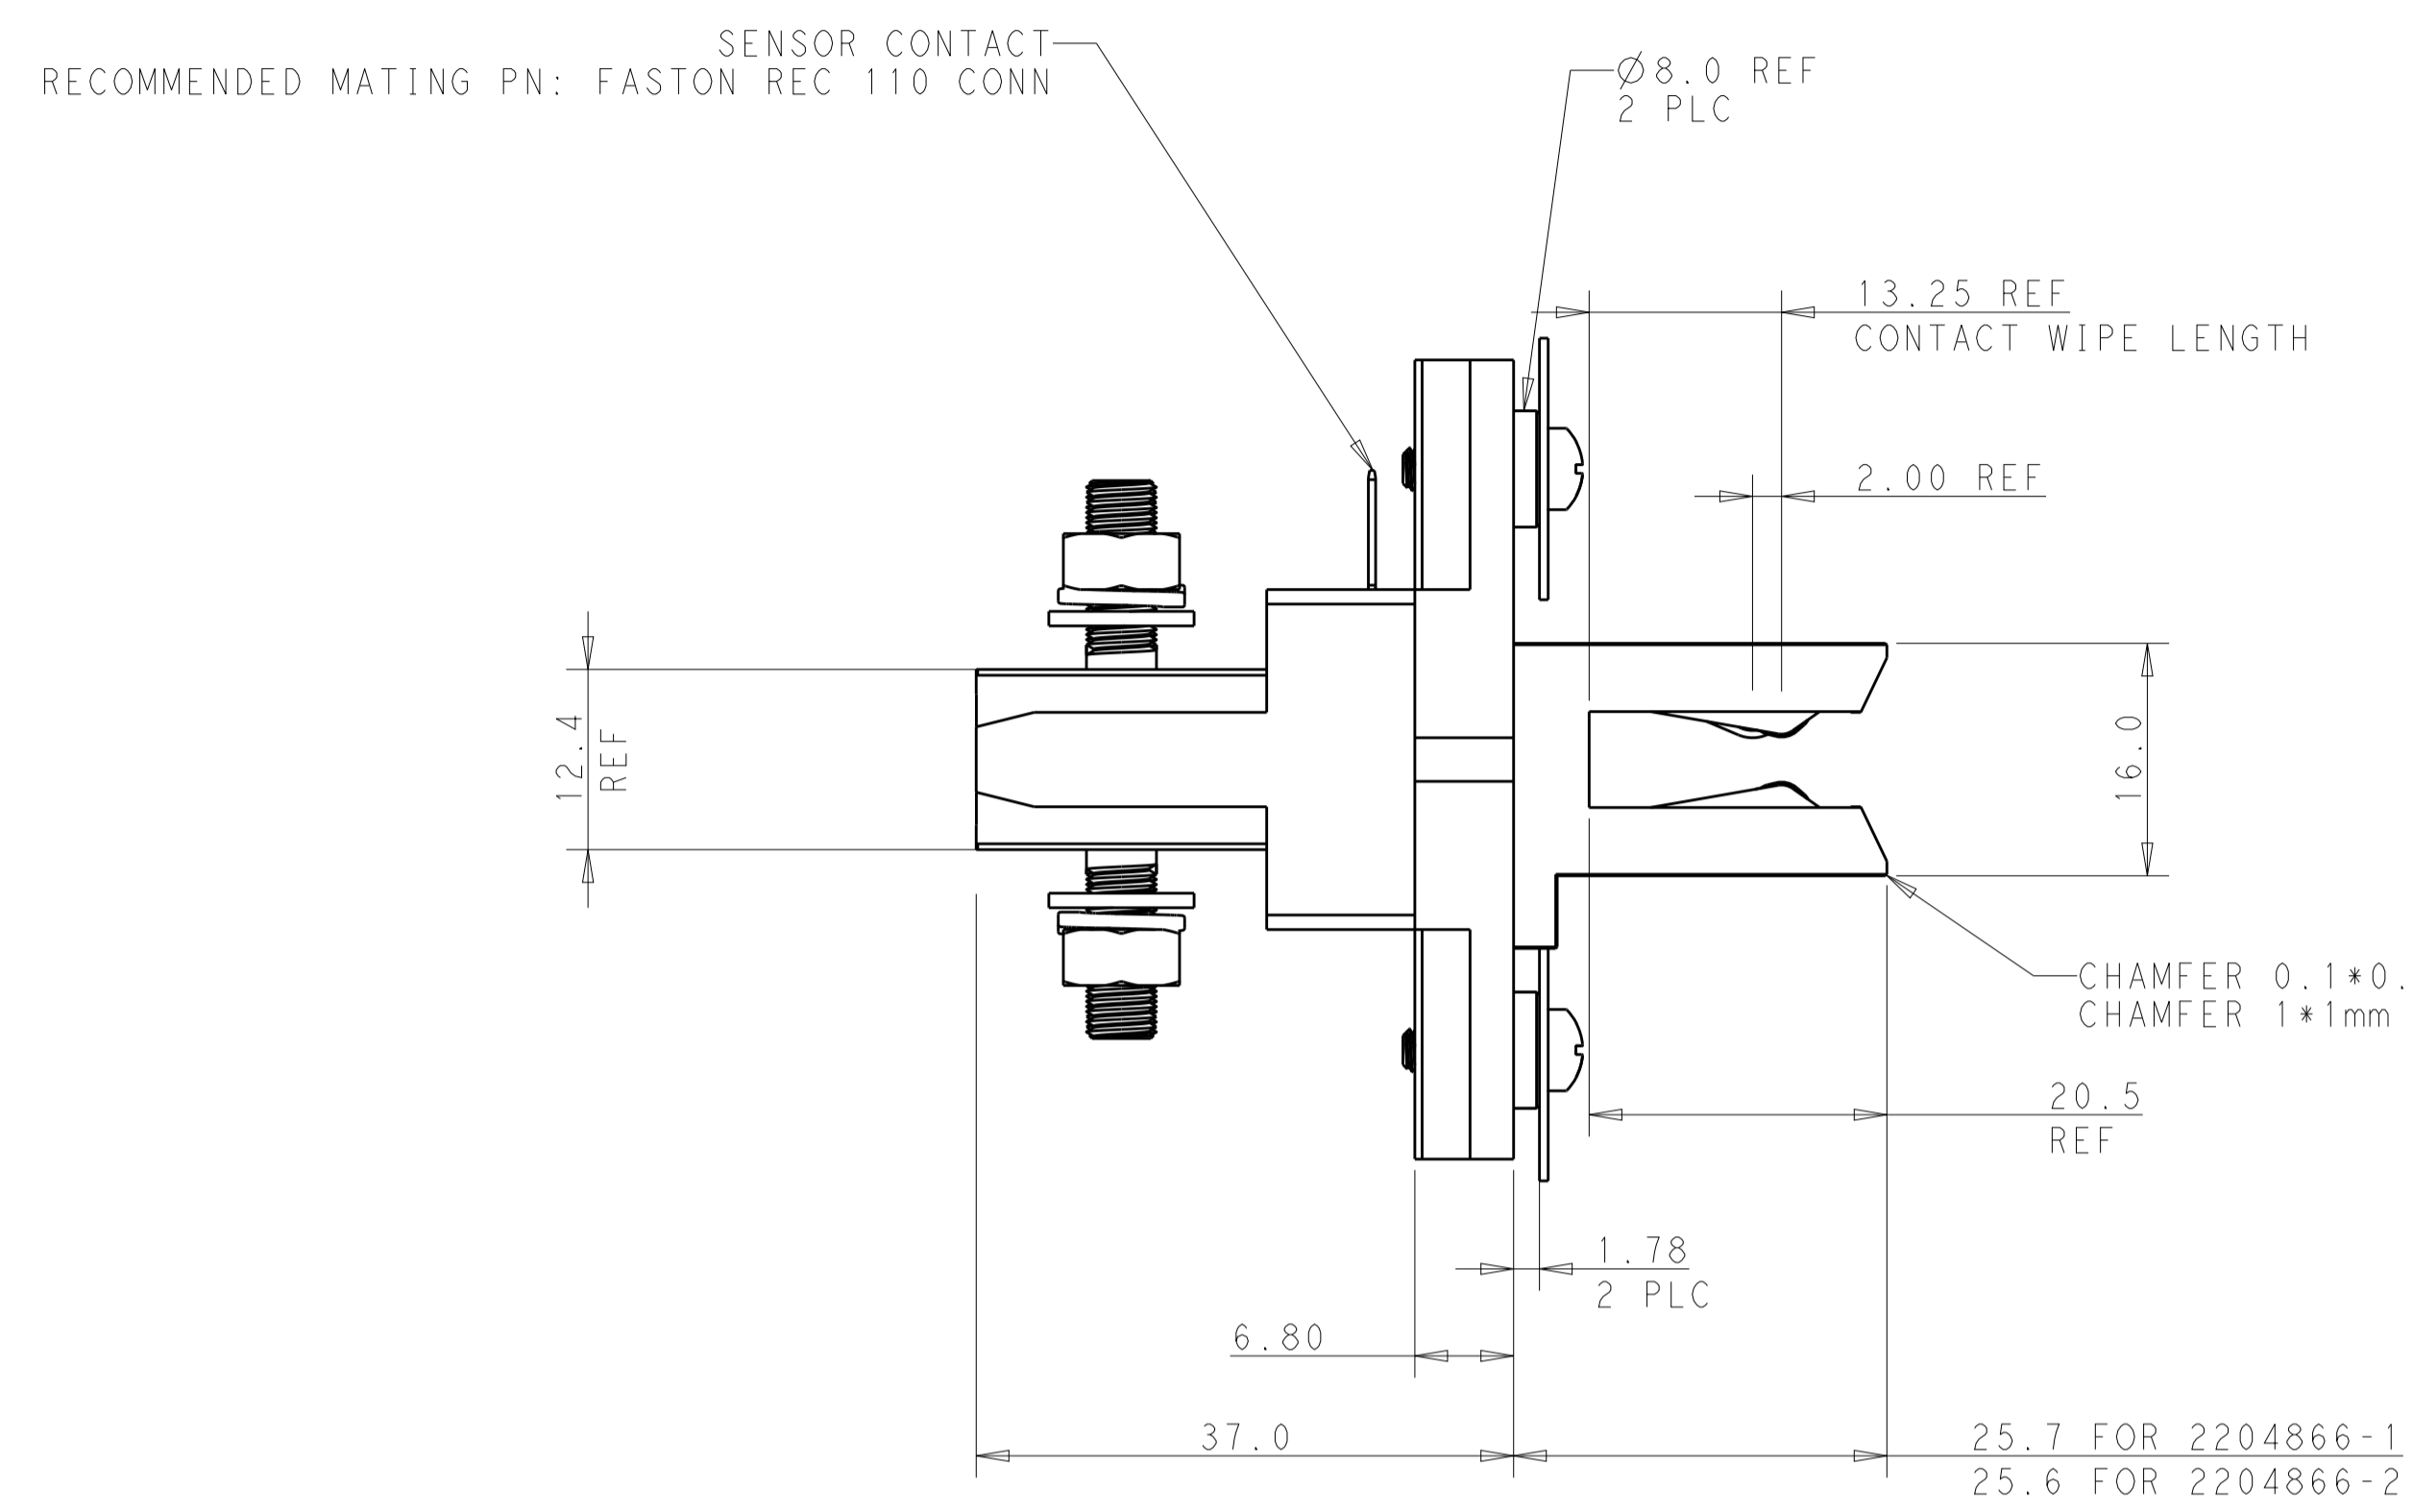

SILVER PLATING	3um SILVER PLATING OVER 1.25um MIN. NICKEL BASE-PLATED	3.0±0.05	6.0±0.20	BB500A RACK BUS BAR DUAL POWER CONNECTOR	2204866-2
SILVER PLATING	3um SILVER PLATING OVER 1.25um MIN. NICKEL BASE-PLATED	3.0±0.05	6.0±0.20	BB500A RACK BUS BAR DUAL POWER CONNECTOR	2204866-1
CONNECTOR PLATING	MATING BLADE PLATING	SEPERATE BUS BAR THICKNESS	MATING BLADE THICKNESS	DESCRIPTION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	±1
1 PLC	±0.5
2 PLC	±0.30
3 PLC	±0.150
4 PLC	±0.1
ANGLES	±0°

MATERIAL: THERMO PLASTIC, BLACK, UL94 V-0

FINISH: SILVER PLATING OVER NICKEL BASE-PLATED

THIS DRAWING IS A CONTROLLED DOCUMENT. DWN: MAC LIU 10JAN2017, CHK: SUNY ZHAO 10JAN2017, APVD: SUNY ZHAO 10JAN2017

NAME: CUSTOMER DRAWING DUAL-POLE RACK BUS BAR POWER CONN

PRODUCT SPEC: 108-128050


APPLICATION SPEC: 114-128051

SIZE: A1, CAGE CODE: -

SCALE: 2:1, SHEET: 1 OF 3, REV: A2



REVISIONS				
P.	LTN.	DESCRIPTION	DATE	APVD.
-	-	SEE SHEET 1	-	-

HARDWARE LIST		
ITEM	DESCRIPTION	QTY/PC
1	M5 NUT	4
2	M5 WASHER	4
3	M5 SPRING WASHER	4
4	M3 PANEL SCREW	2
5	M3 PANEL WASHER	2

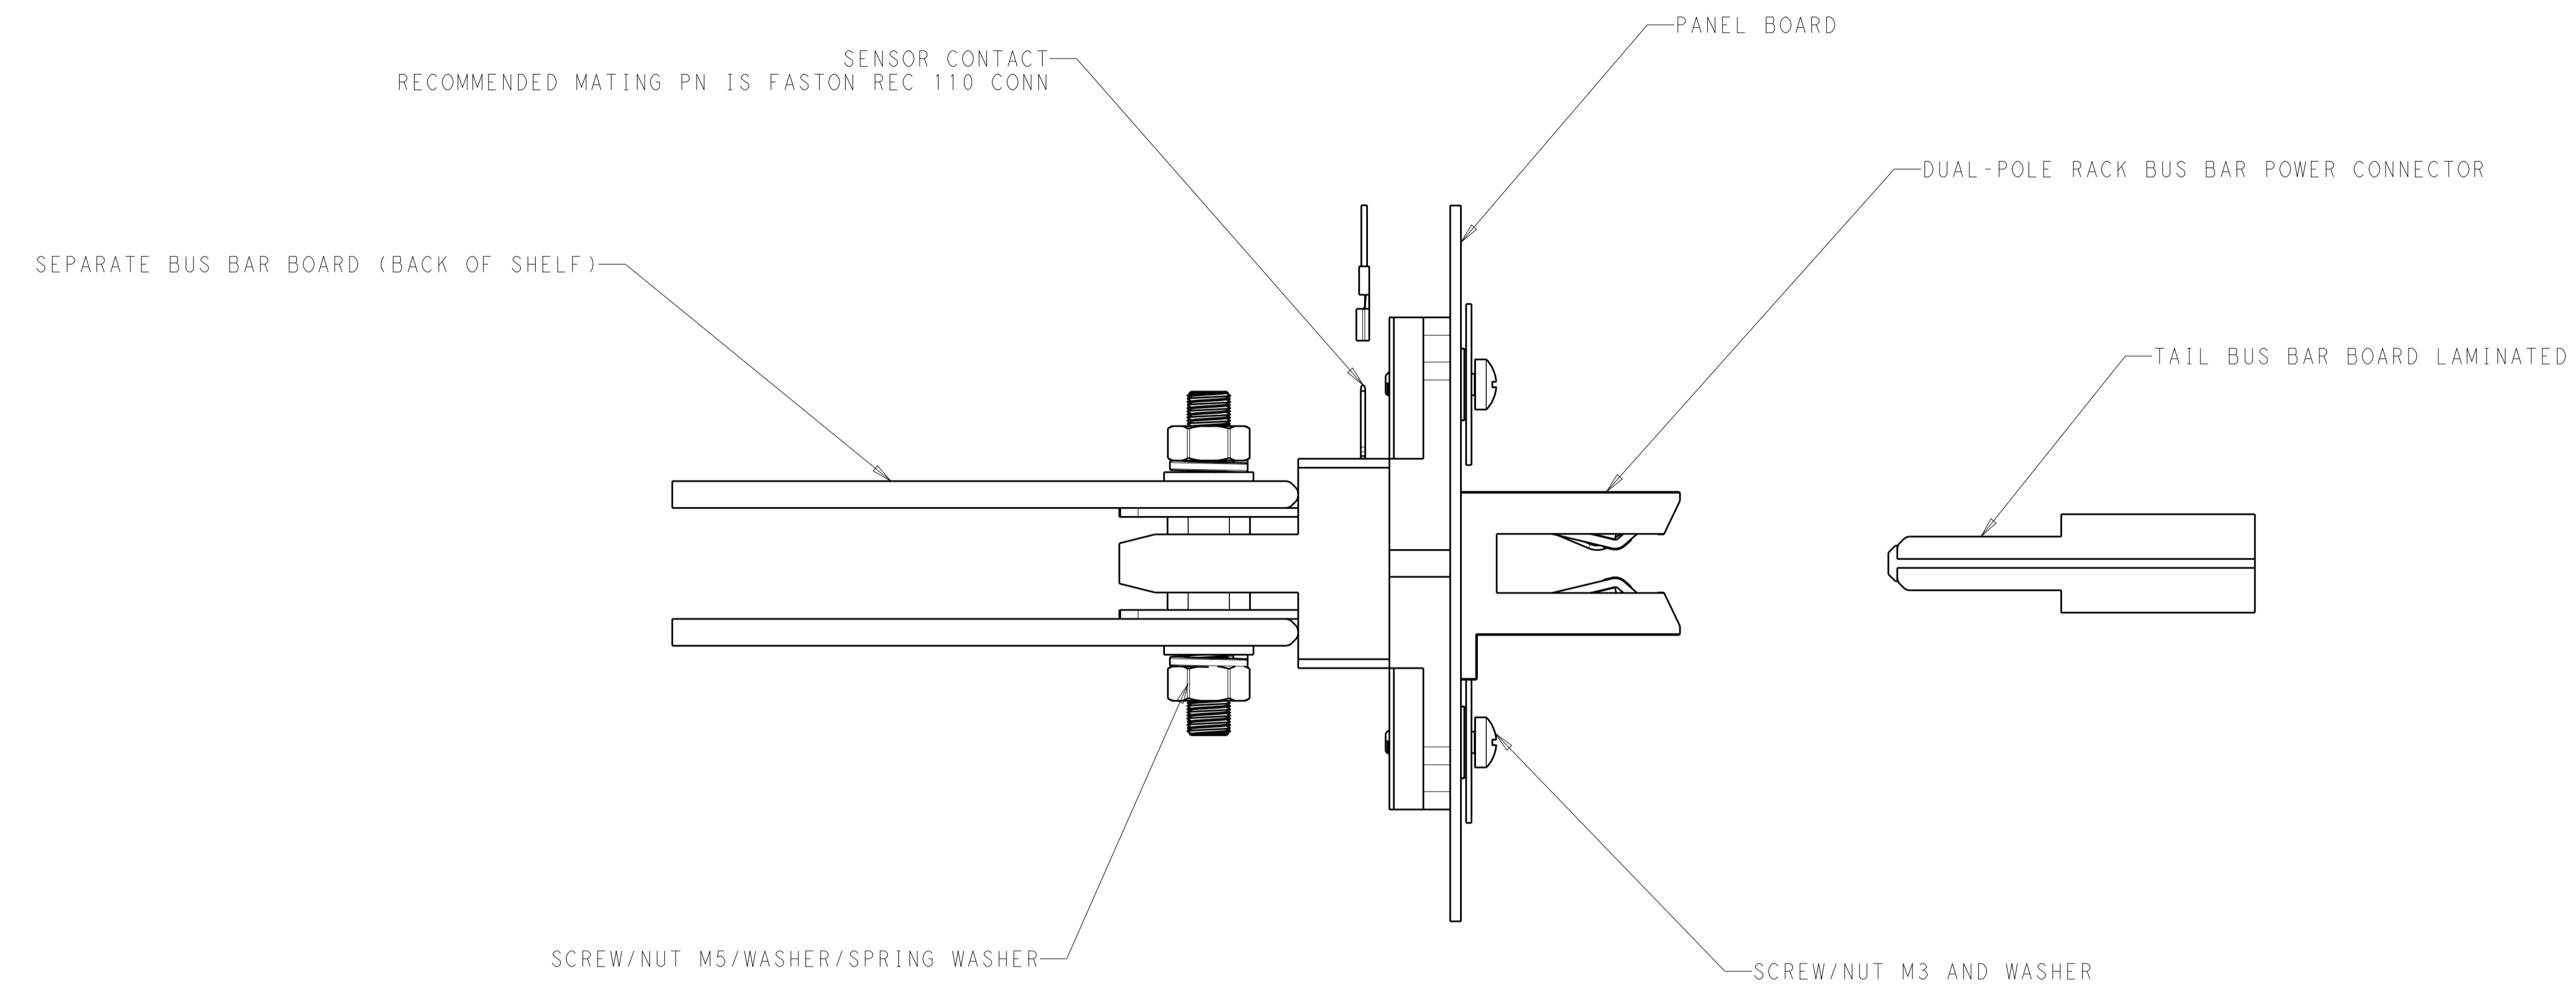


PRODUCT BOARD APPLICATION PREFERENCE VIEW
P/N: 2204866-*

SCALE 2:1

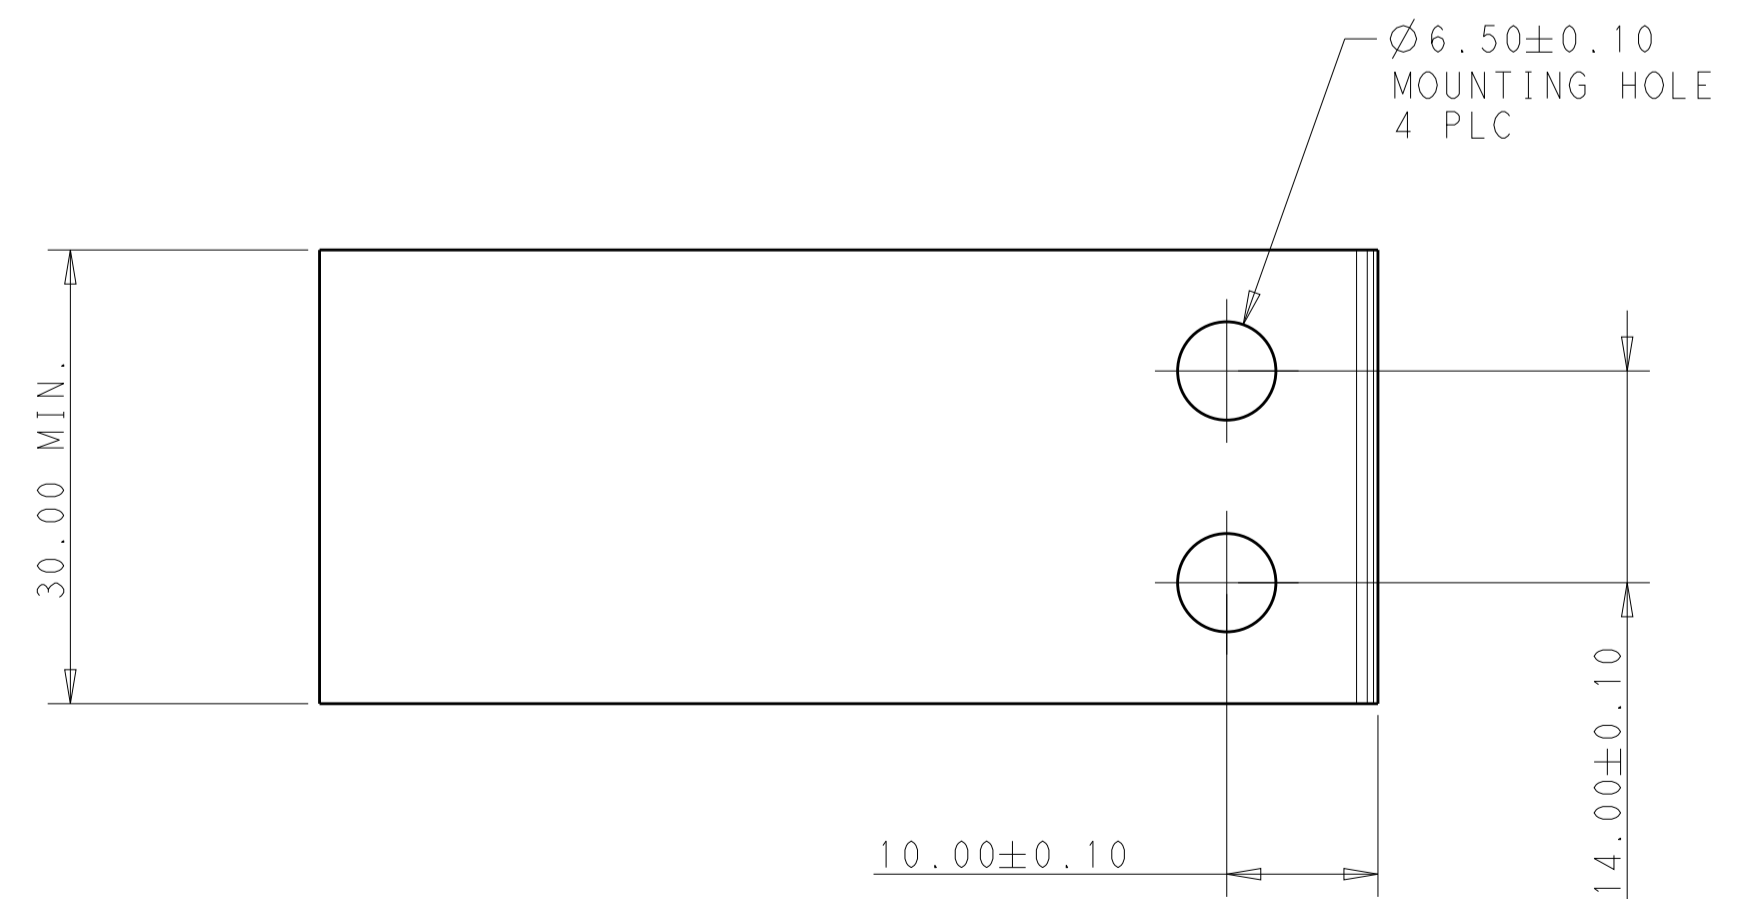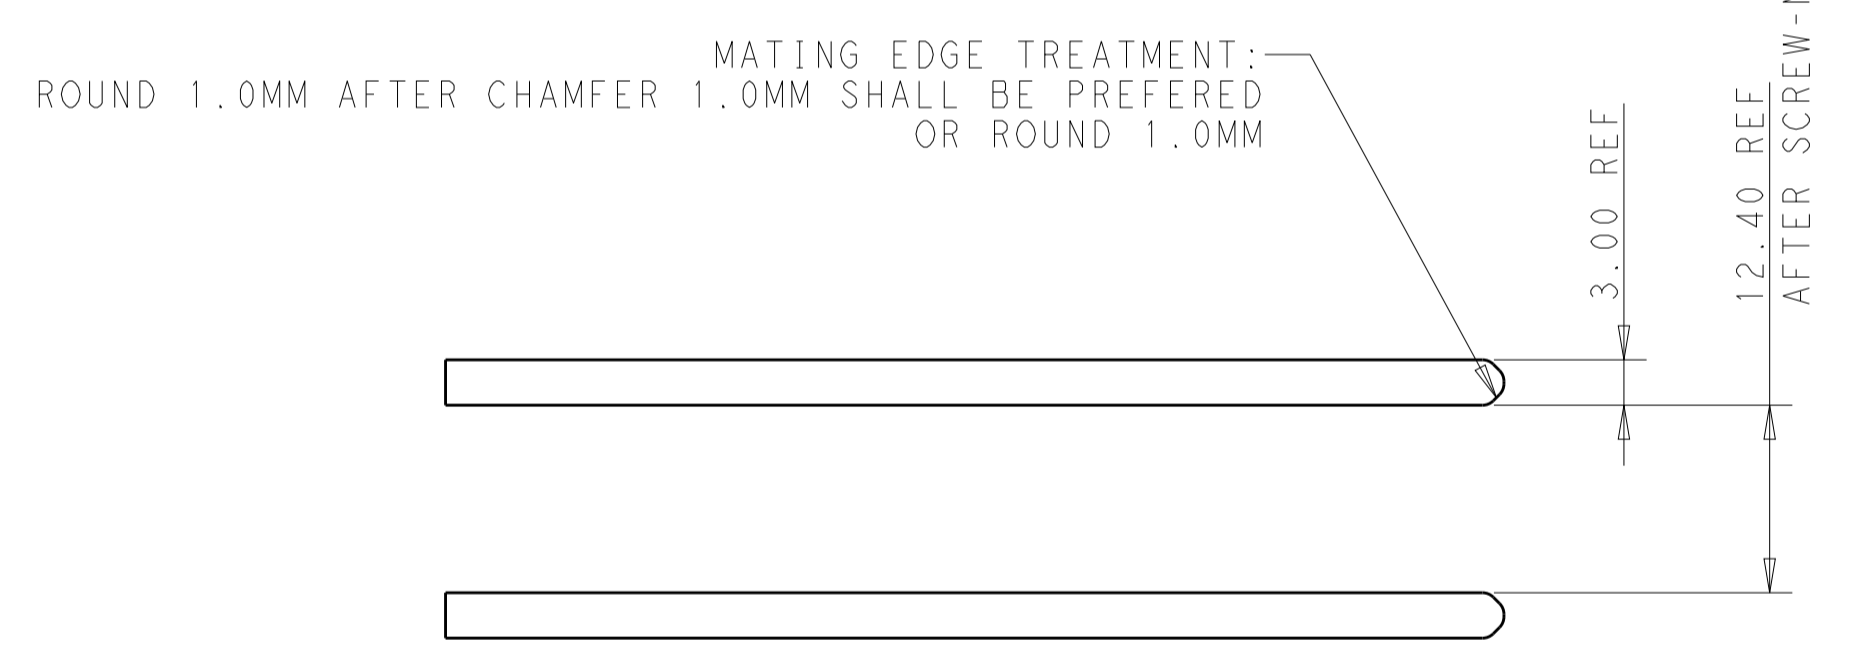

RECOMMENDED SEPARATE BUS BAR BOARD VIEW
PLATING SPEC.: 3um Sn PLATING OVER 1.27um NICKEL BASE-PLATED ON COPPER

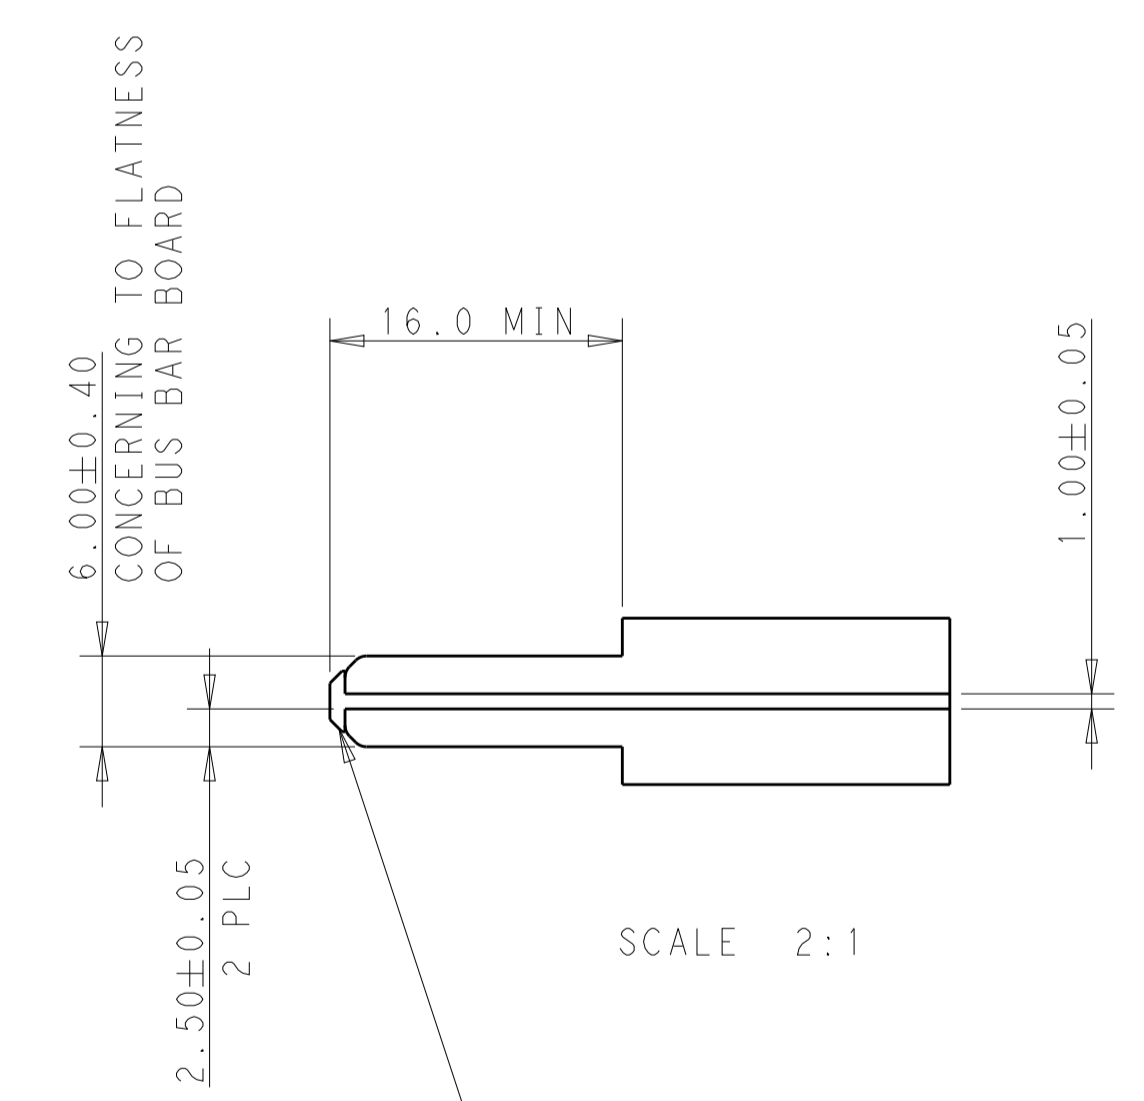


SCALE 2:1

RECOMMENDED TAIL BUS BAR BOARD VIEW
PLATING SPEC.: 3um SILVER PLATING OVER 1.27um NICKEL BASE-PLATED ON COPPER IN CONTACT AREA


THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN: MAC LIU 10JAN2017	 TE Connectivity
DIMENSIONS: mm		CHK: SUNY ZHAO 10JAN2017	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD: SUNY ZHAO 10JAN2017	
0 PLC ±1 1 PLC ±0.5 2 PLC ±0.30 3 PLC ±0.150 4 PLC ±* ANGLES ±2°		NAME: CUSTOMER DRAWING PRODUCT SPEC: 108-128050 APPLICATION SPEC: 114-128051 WEIGHT: - CUSTOMER DRAWING	
MATERIAL: -		SIZE: A1	RESTRICTED TO: -
FINISH: -		CAGE CODE: C=2204866	SCALE: 2:1
		SHEET: 2 OF 3	REV: A2

REVISIONS				
P.	LTN.	DESCRIPTION	DATE	APVD.
-	-	SEE SHEET 1	-	-

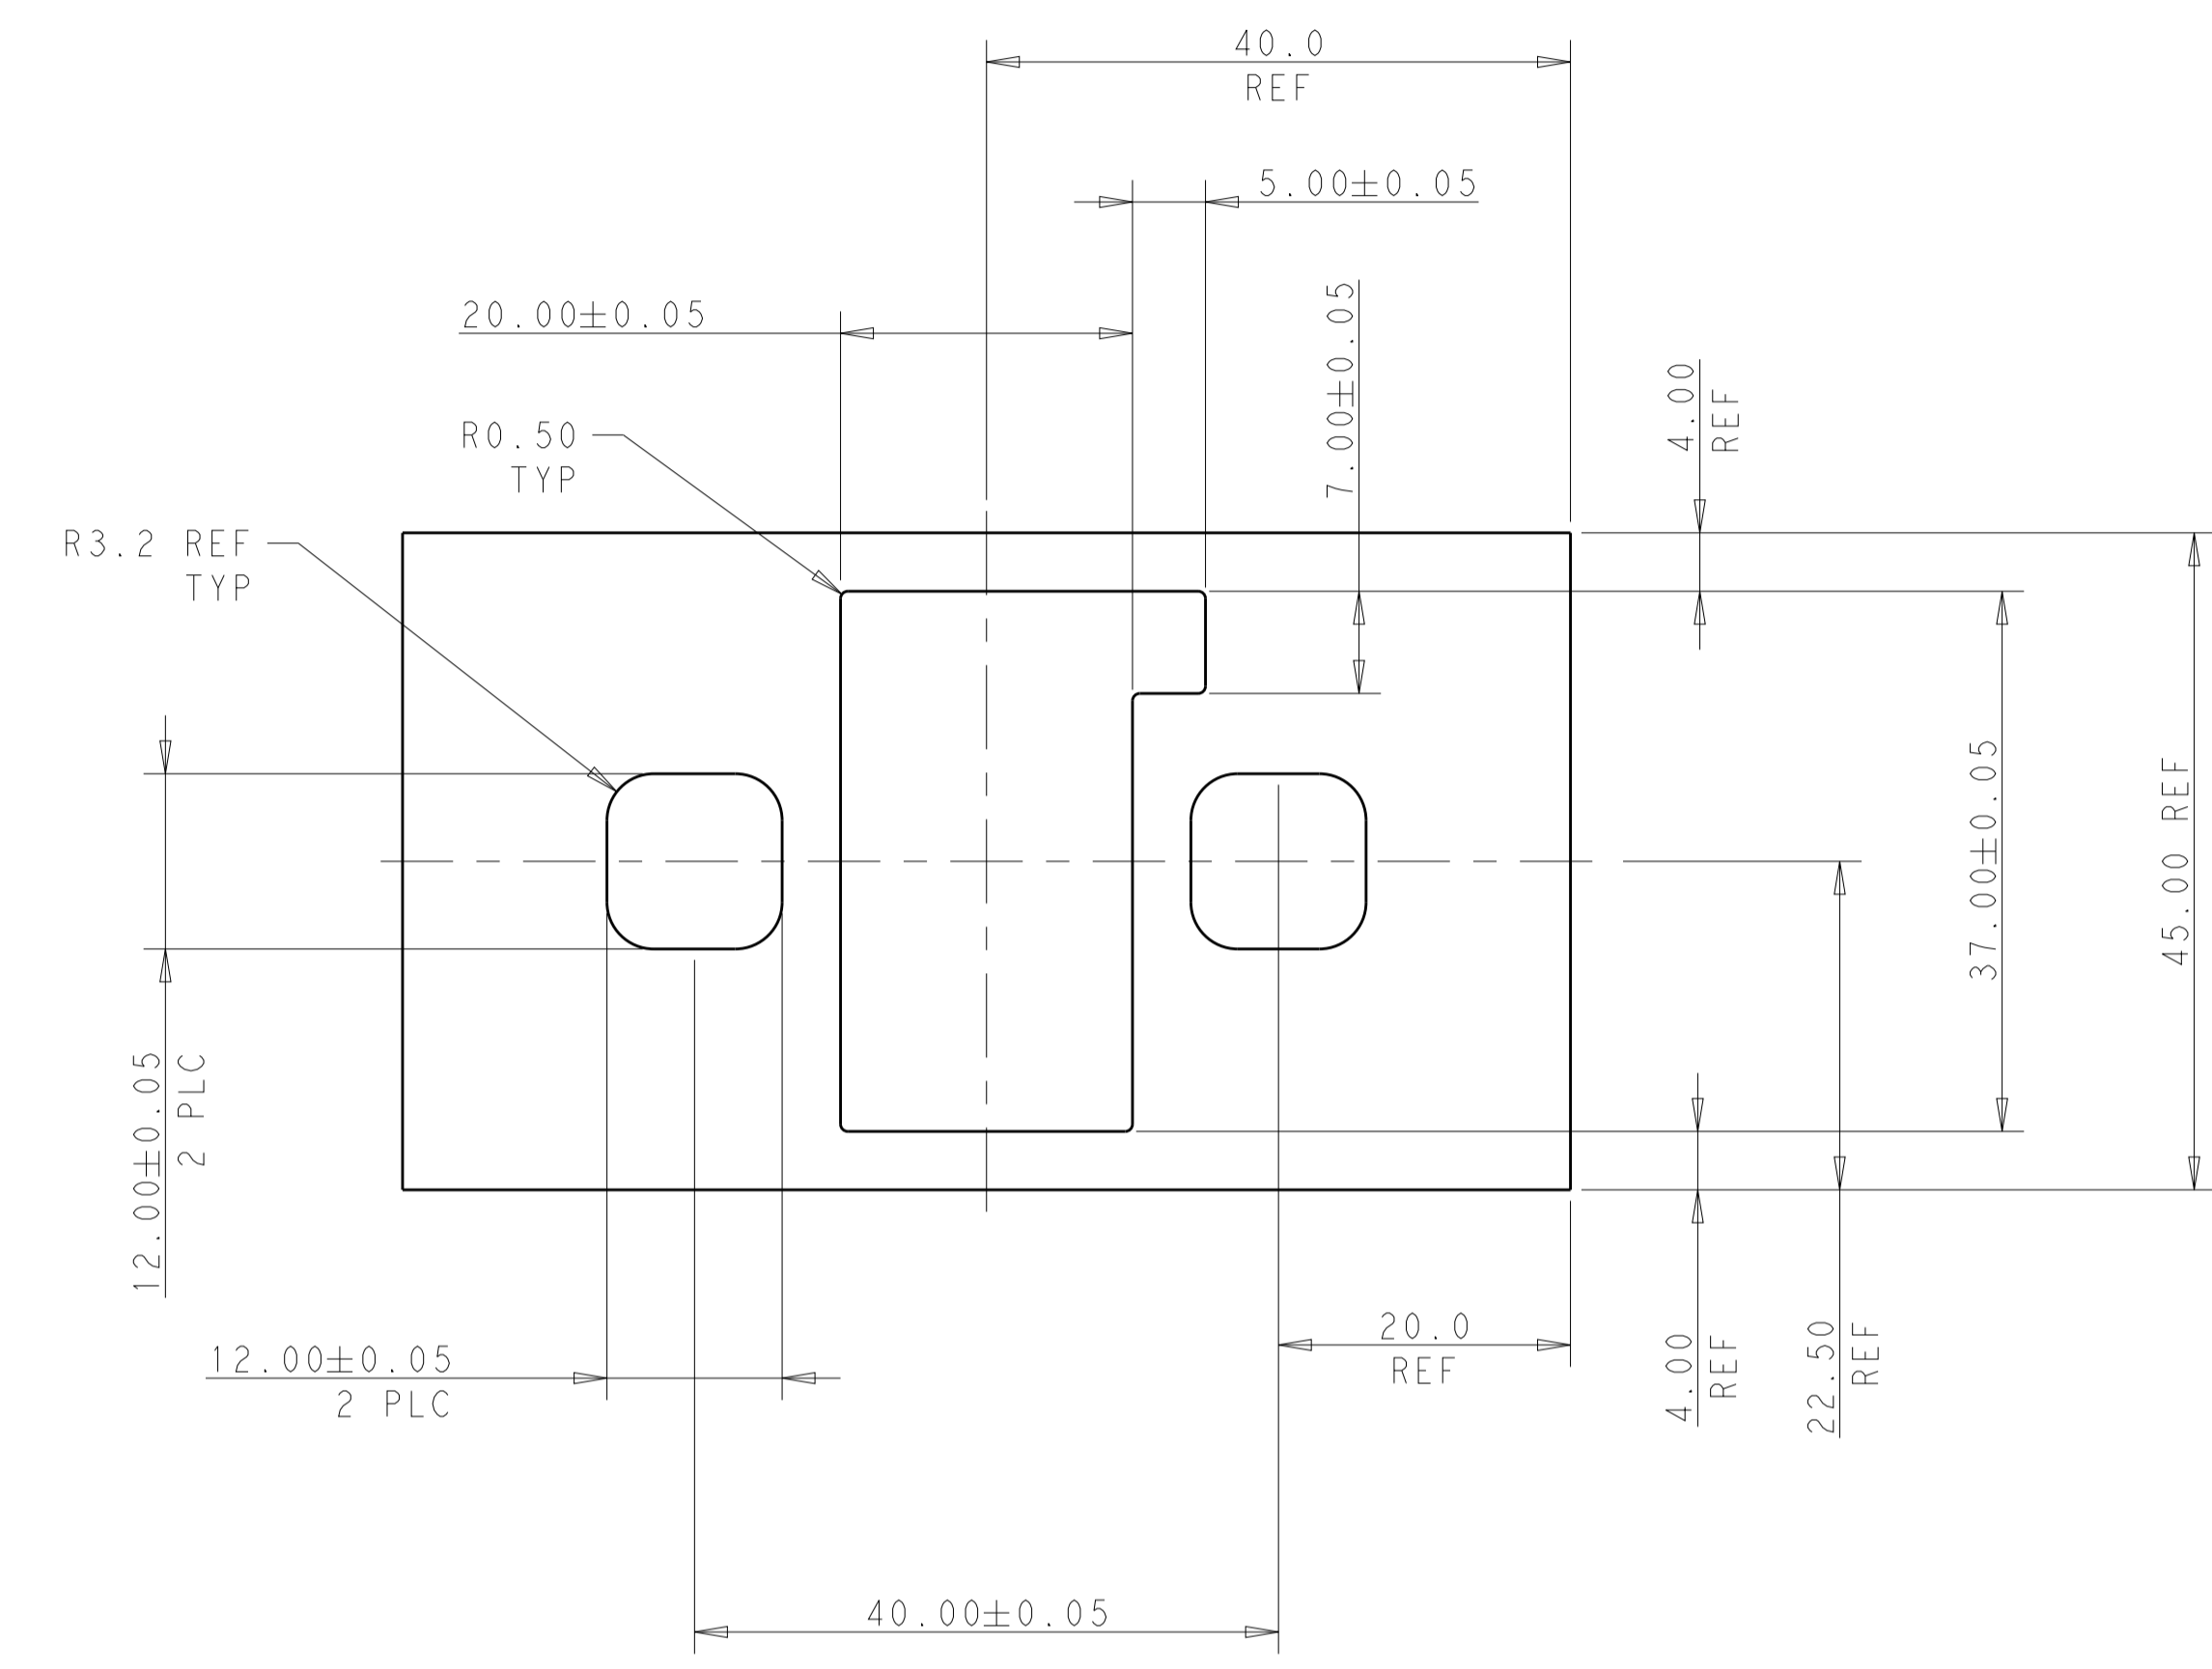

SCALE 2:1

REFERENCE PANEL BOARD LAYOUT BACK VIEW
 THICKNESS 1.20MM

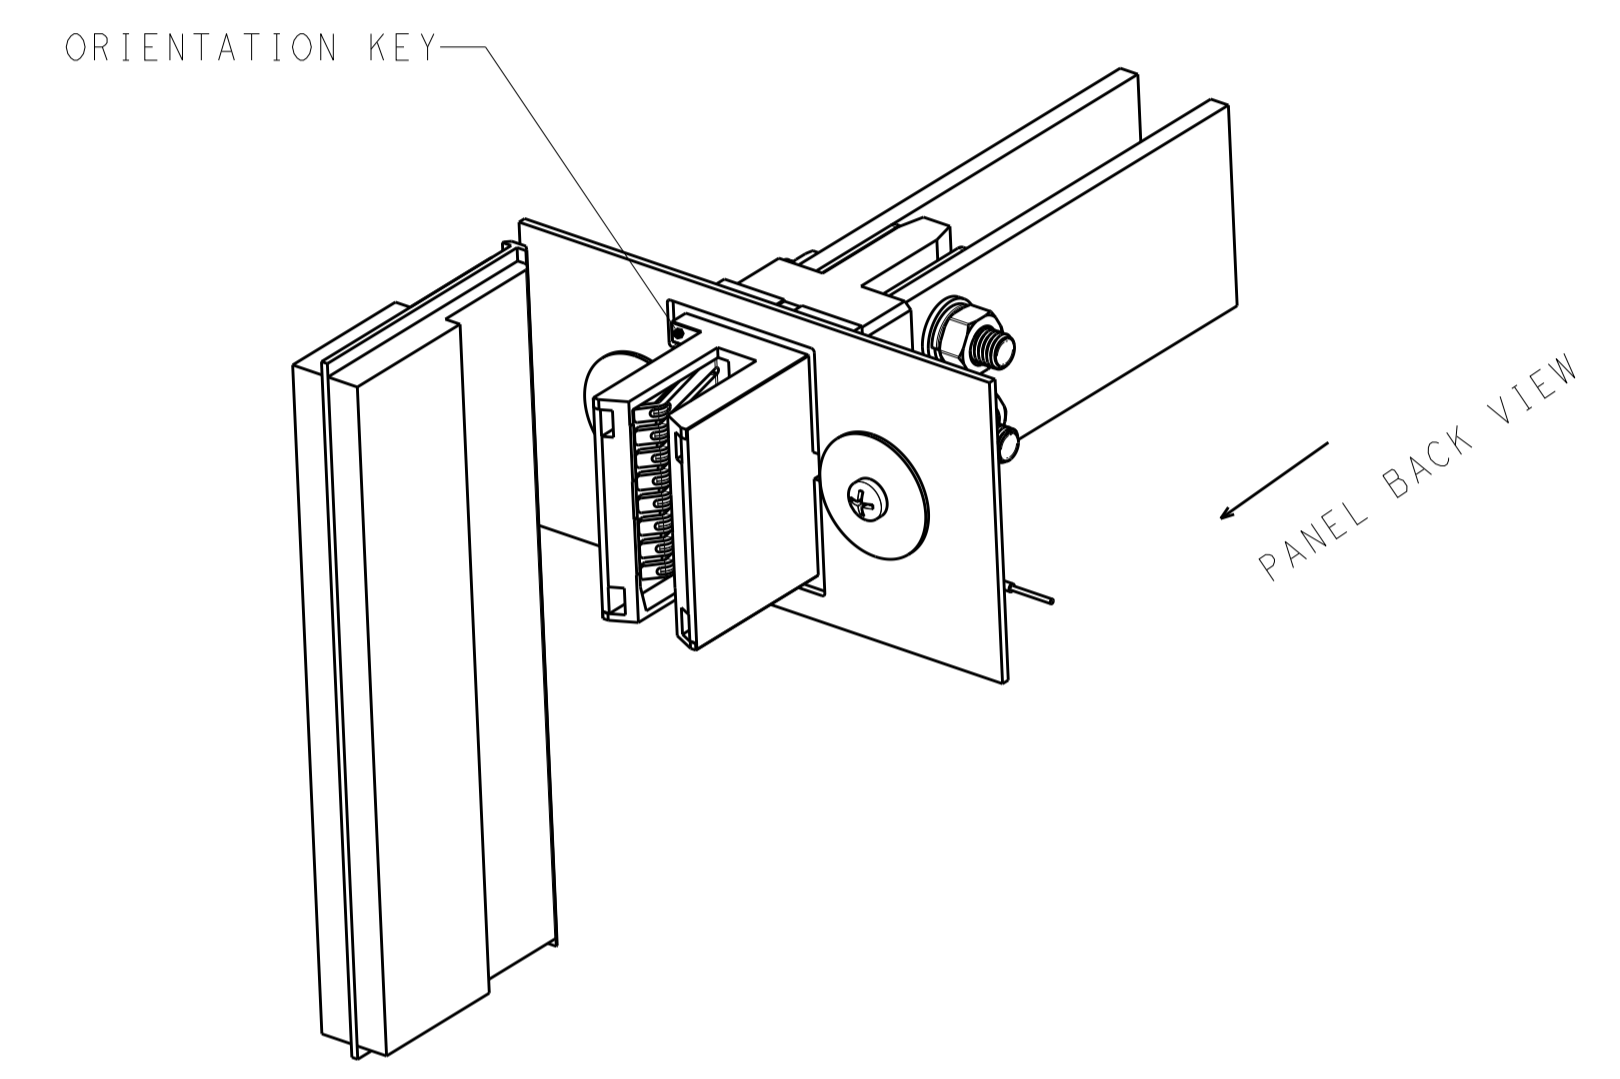

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN: MAC LIU 10JAN2017	
DIMENSIONS: mm		CHK: SUNY ZHAO 10JAN2017	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±1 1 PLC ±0.5 2 PLC ±0.30 3 PLC ±0.150 4 PLC ±* ANGLES ±2°		APVD: SUNY ZHAO 10JAN2017	NAME: CUSTOMER DRAWING
MATERIAL: -		PRODUCT SPEC: 108-128050	DUAL-POLE RACK BUS BAR POWER CONN
FINISH: -		APPLICATION SPEC: 114-128051	POWER CONNECTOR
CUSTOMER DRAWING		WEIGHT: -	RESTRICTED TO: -
SCALE: 2:1		SIZE: A1	CAGE CODE: C=2204866
SHEET: 3 OF 3		REV: A2	

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)