


- 1 ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
- 2 TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
- 3 THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
- 4 POST PLATING: .000100-.000200 BRIGHT TIN OVER .000050 NICKEL ENTIRE POST.
- 5 HOUSING: LCP, COLOR-BLACK.
- 6 POST MATERIAL: COPPER ALLOY.
- 7 PACKAGED IN TAPE AND REEL PER EIA-481 SPECIFICATION.

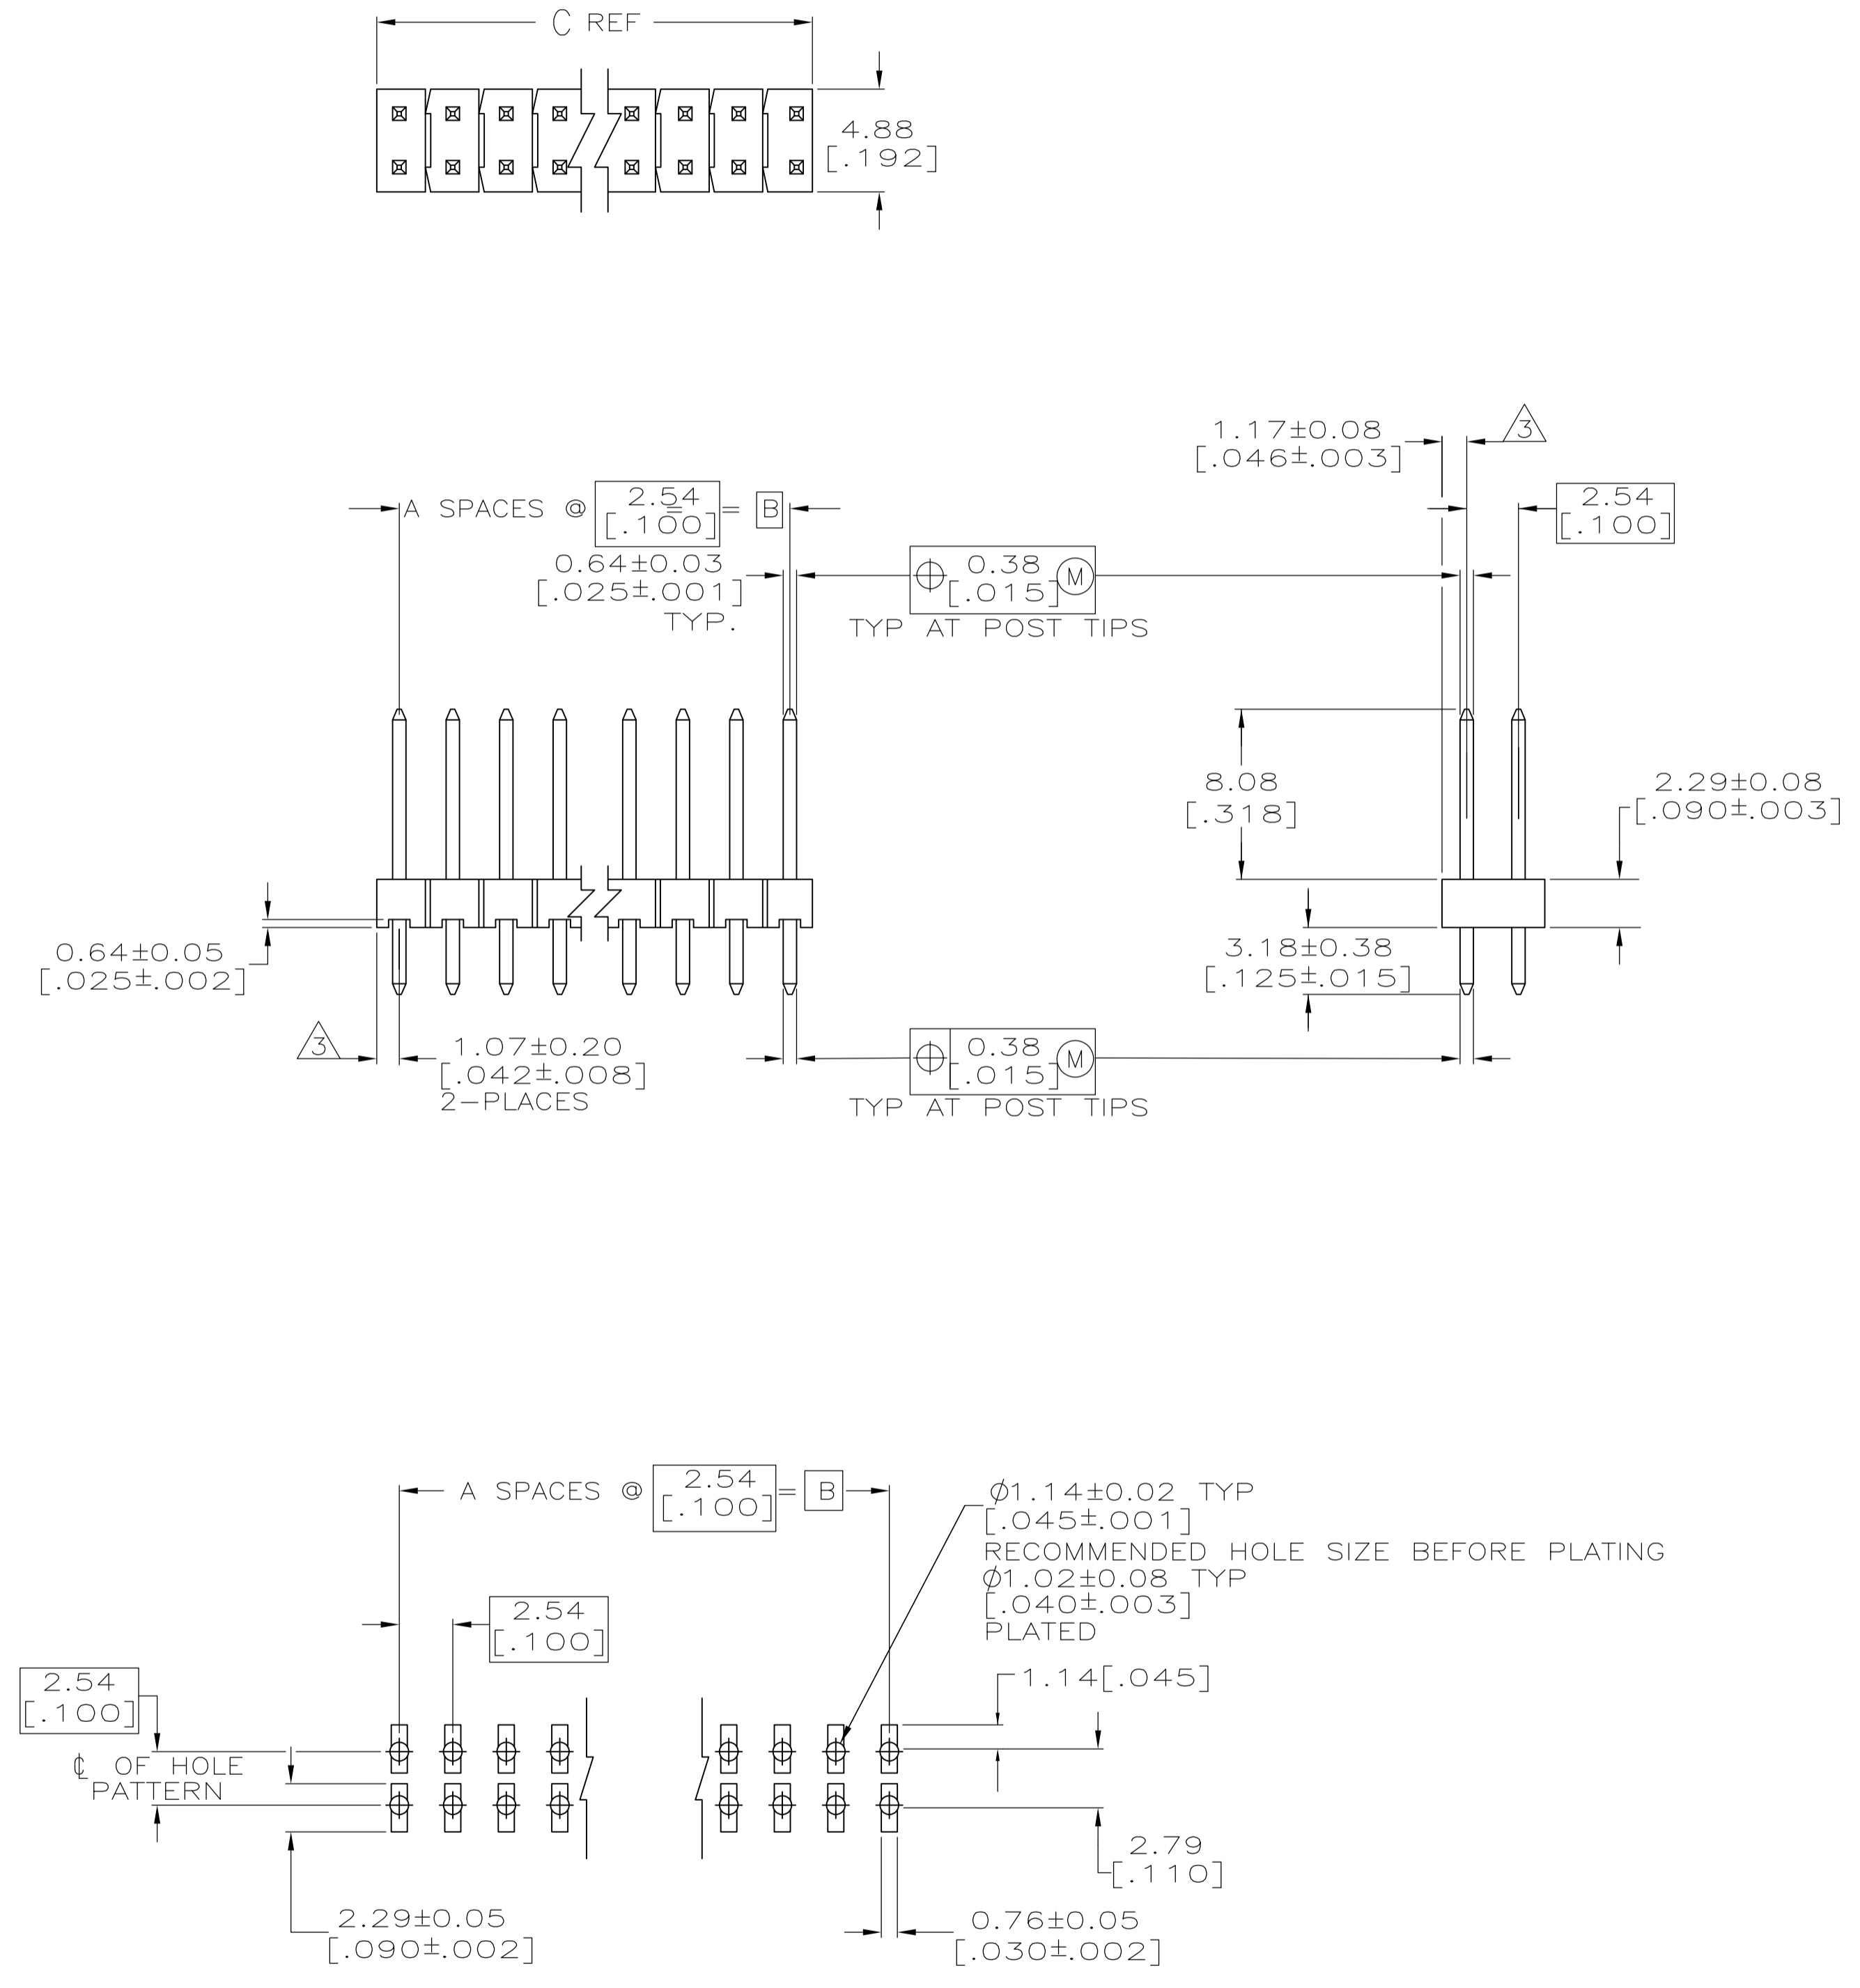

RECOMMENDED PC BOARD MOUNTING DIMENSIONS FOR .063 [1.60] THICK PC BOARD AND .012 [0.305] STENCIL THICK.

44mm	9.75 [0.384]	7.62 [0.300]	3	8	1571229-1
TAPE WIDTH	C	B	A	NO. OF POSITIONS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN R BROWN 01FEB02	 TE Connectivity
DIMENSIONS: mm		CHK J GESFORD 01FEB02	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD J GESFORD 01FEB02	NAME
0 PLC ± -			HEADER ASSEMBLY, MOD II, BREAKAWAY, DOUBLE ROW, HIGH TEMPERATURE
1 PLC ± -			PACKAGED IN TAPE AND REEL
2 PLC ± 0.51[.02]			APPLICATION SPEC
3 PLC ± 0.12[.005]			SIZE
4 PLC ± 0.012[.0005]			WEIGHT
ANGLES ± -			SCALE
MATERIAL	FINISH	WEIGHT	RESTRICTED TO
		A1 00779	1571229
		CUSTOMER DRAWING	SHEET 1 OF 1 REV C

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)