


THIS DRAWING IS UNPUBLISHED.		RELEASED FOR PUBLICATION	
© COPYRIGHT - By -		ALL RIGHTS RESERVED.	
SHRINK TUBING	PER MIL-I-23053/8	NONE	
CLIP CONTACT RETAINING	BeCu ASTM-B-194 OR STAINLESS STEEL PER QQ-S-766	NONE	
CONTACT FEMALE SOCKET	BERYLLIUM COPPER PER QQ-C-533	GOLD PLATE PER MIL-G-45204 OVER NICKEL	
SPLICE ASSEMBLY HOUSING	EPIALL TYPE 1908	NONE	
GROMMET	FLUROROSILICONE	COLOR - NATURAL	
RESISTOR	RNC55H1503 FR 150KΩ1/10 WATT ±1% PER MIL-R-55182	NONE	
DESCRIPTION	MATERIAL	FINISH	

LOC		DIST		REVISIONS			
-	-	P	LTR	DESCRIPTION	DATE	DWN	APVD
		A		REV PER ECO-12-000064	24JAN12	PY	DE

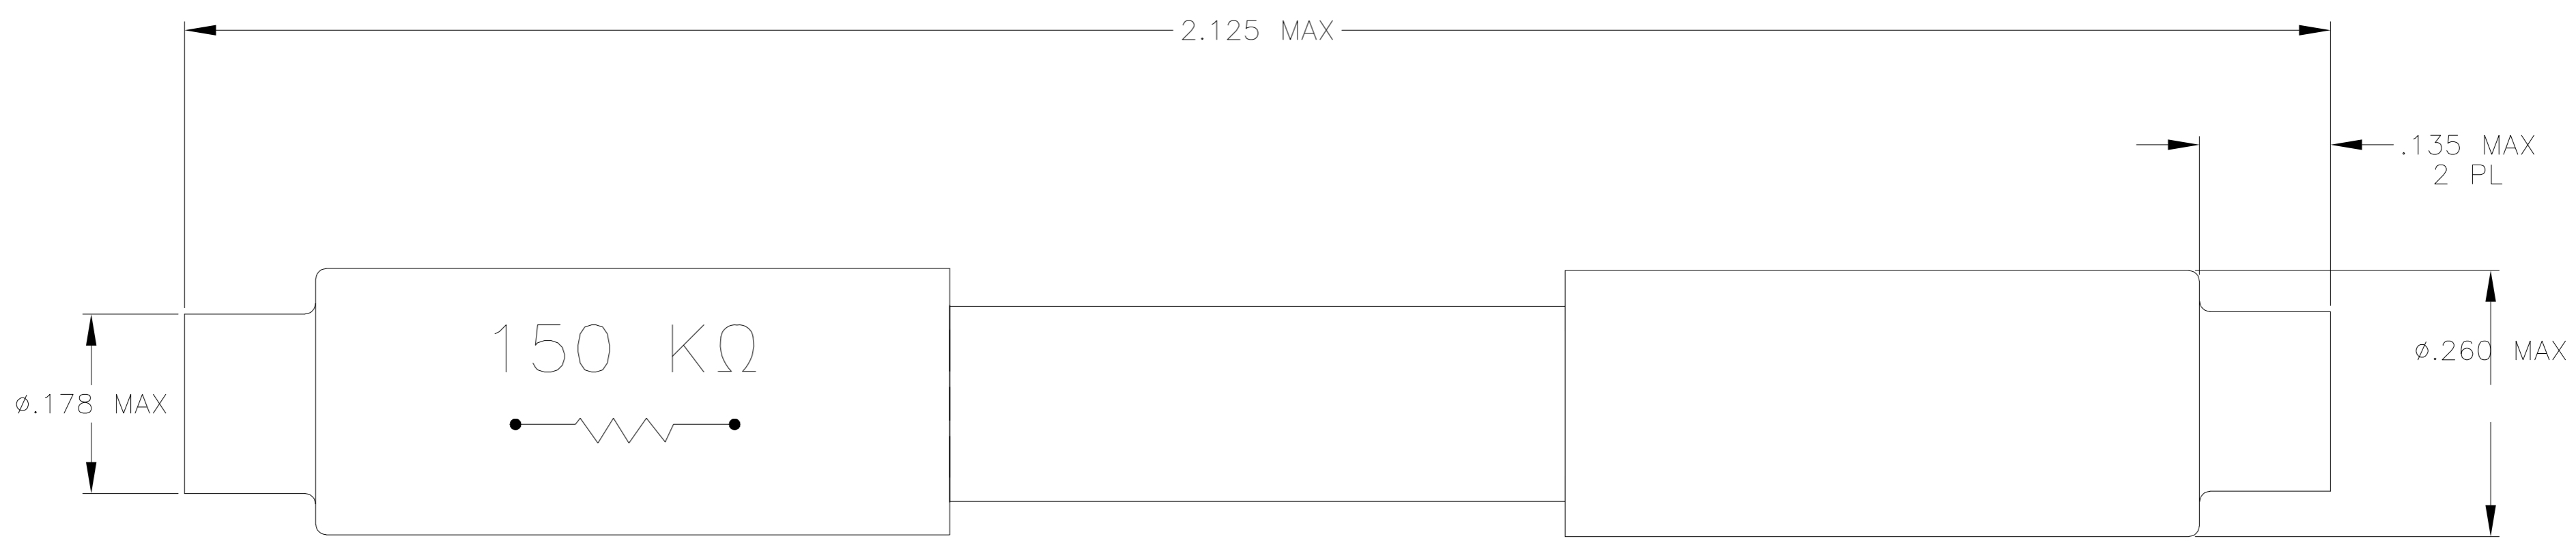

1. THIS ASSEMBLY MEETS OR EXCEEDS THE GENERAL REQUIREMENTS OF MIL-T-81714, CLASS B
2. PIN CONTACTS, SEALING RINGS & INSERTION/WXTRACTION TOOL SHALL BE ORDERED SEPARATELY
 - A) PIN CONTACT: AMP P/N 2-592404-1, MILITARY P/N 39029/1-101
 - B) SEALING PLUGS: AMP P/N 592104-1, MILITARY P/N MS27488-20
 - C) INSERTION/EXTRACTION TOOL: AMP P/N 592105-1, MILITARY P/N M81969/14-11
3. ENVIRONMENTS CREATED BY THE OPERATION OF INTERNAL ELECTRONIC COMPONENTS WHICH EXCEED THE MODULE RATED PERFORMANCE IS THE RESPONSIBILITY OF THE USER. THE ELECTRONIC COMPONENT SPECIFICATIONS SHOULD BE CONSULTED.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	04-09-97		STE TE Connectivity			
DIMENSIONS: INCHES		CHK	4-11-97					
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	4-11-97		NAME WIRE SPLICE, SINGLE SIZE 20			
0 PLC ± -		PRODUCT SPEC	-					
1 PLC ± -		APPLICATION SPEC	-		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
2 PLC ± .01		WEIGHT	-		A2	00779	C=591900	-
3 PLC ± .005		MATERIAL		SEE TABLE	CUSTOMER DRAWING			
4 PLC ± -		FINISH		SEE TABLE	SCALE	1:1	SHEET	1 OF 1
ANGLES ± 30°		REV A						

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)