

REV. 0
DCO 142658


COIL: @ 25°C	
RESISTANCE	140 OHMS ± 10%
NOMINAL VOLTAGE	9.0 VDC
MUST OPERATE	4.4 VDC
MUST RELEASE	2.6 VDC MAX. 0.5 VDC MIN.

ENVIRONMENT:

VIBRATION	10	CPS TO	3000	CPS @	30	g's
SHOCK	75	g's	6	MS. DURATION		
TEMPERATURE	-65	°C TO	+125	°C		

NOTES: OPERATE & RELEASE 4 MS MAX.
CONTACT STABILIZATION TIME 2.5 MS MAX.

CUSTOMER DATA SHEET

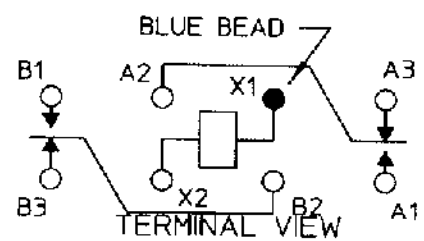

CONTACT RATING: LOW LEVEL TO
2 AMPS 28 VDC RESISTIVE
50,000 OPERATIONS

DR. PBB 1/25/01 CK. TLG 01-25-00



CUST.	QPL	"3SBC" RELAY
CUST. NO.	M39016/13-075P REV.	

3SBC2020A2

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)