

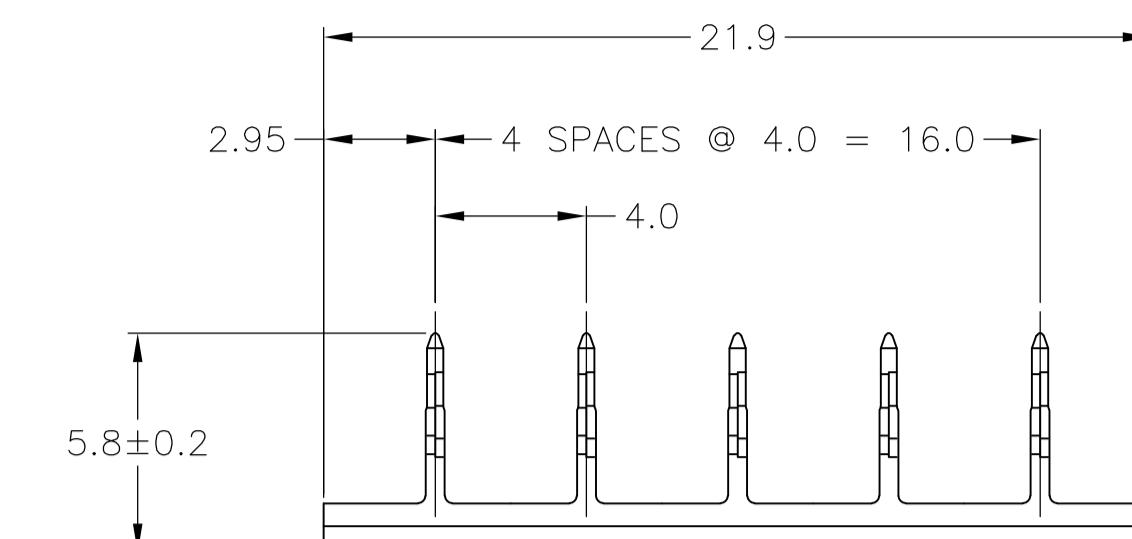
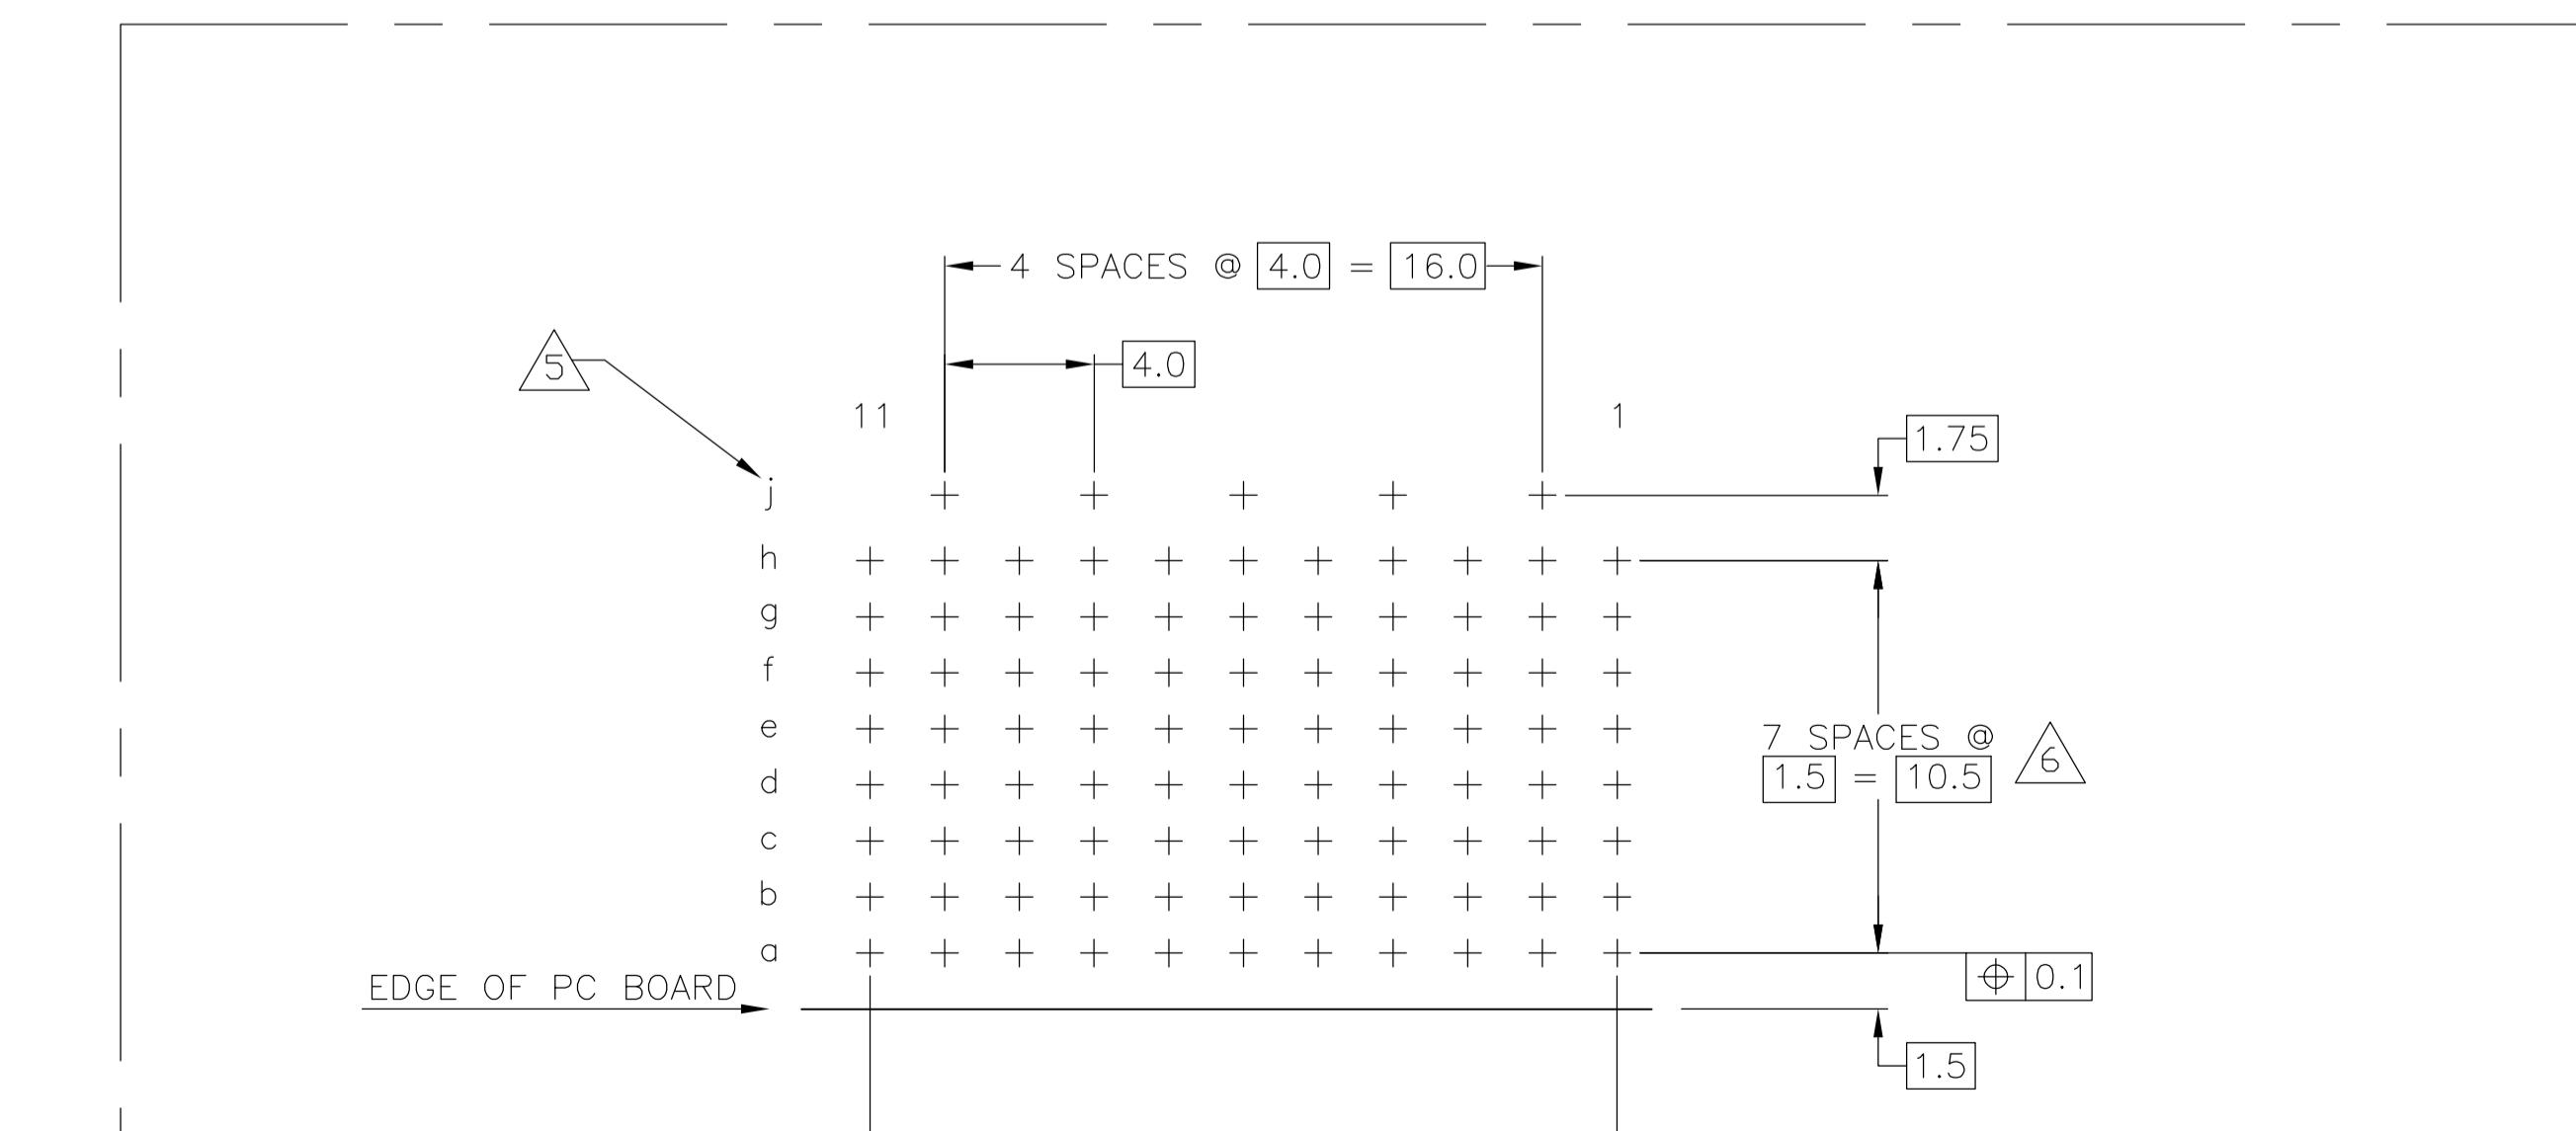


LOC	DIST	REVISIONS		
AD	00	P	LTR	DESCRIPTION
		F		REVISED PER ECO-07-030174 26MAR08 DH JE
		F1		REVISED PER ECO-10-000443 15JAN10 KK AEG
		G		ECR-10-018652 10SEP10 SW MQW

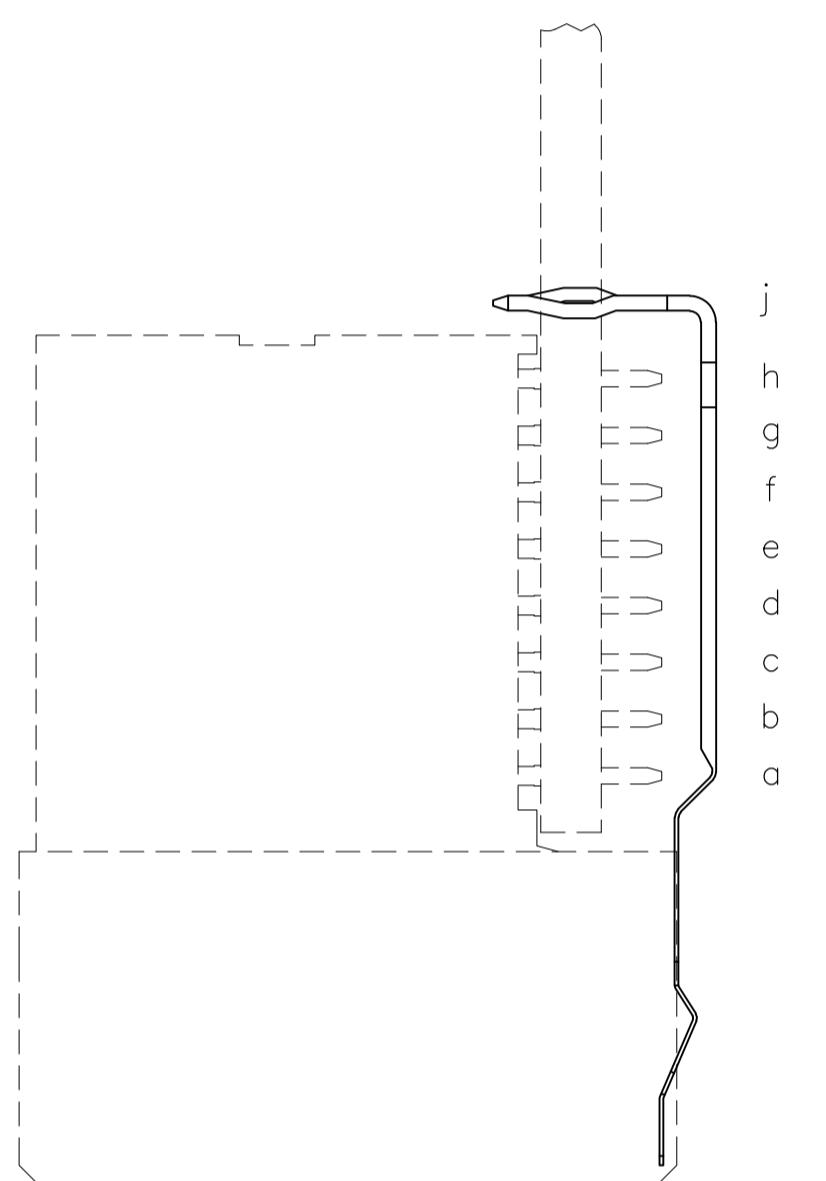

- 1 MATERIAL: CONTACT: PHOSPHOR BRONZE.
- 2 GENERAL PLATING SPECIFICATION: UNDERPLATING (ENTIRE CONTACT): 1.27µm MIN NICKEL AND ACTION PIN: 0.5µm MIN TIN/LEAD. FOR PLATING OF MATING SURFACES SEE APPLICABLE SPECIFICATION REFERENCE FOR EACH DASH NUMBER.
- 3 CONFORMS TO ALL TESTING ACCORDING TO IEC 61076-4-101 PERFORMANCE LEVEL 2.
- 4 CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL 3, CENTRAL OFFICE APPLICATIONS.
- 5 ROW J 5 PLATED THROUGH HOLES FOR LOWER-SHIELD.
- 6 HOLE PATTERN FOR FEMALE CONNECTOR TYPE A. 88 PLATED-THROUGH HOLES A 1.5 X 2mm GRID.
- 7 CONTACT AREA LUBRICATED WITH BELLCORE APPROVED LUBRICANT. TECHNICAL REFERENCE: GR-1217-CORE, ISSUE 1, NOVEMBER 1995.
- 8 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

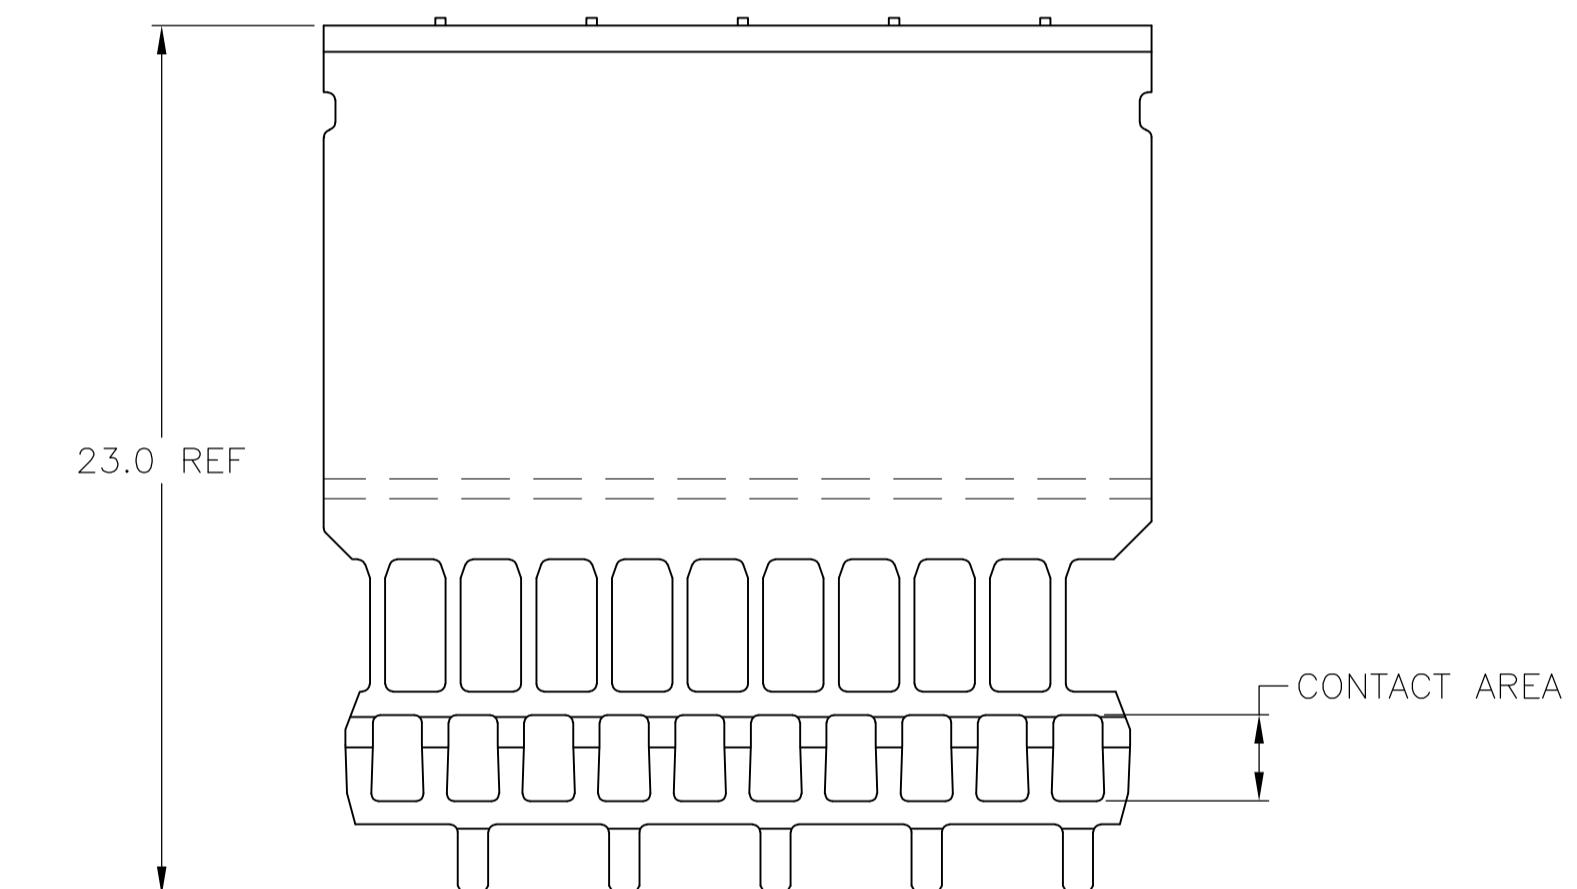

COMPONENT SIDE AS SHOWN  
RECOMMENDED PCB-HOLE LAYOUT

PCB HOLE DIM ACTION PIN  
DRILLED HOLE: 0.7±0.025  
FIN HOLE: 0.55 TO 0.65mm  
Cu-thks: 0.025 TO 0.050mm  
SnPb-thks: 0.004 TO 0.010mm

THIS DRAWING IS A CONTROLLED DOCUMENT.		06DEC05	Tyco Electronics Corporation	
DIMENSIONS:		06DEC05	NAME	
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD	GROUND RETURN LOWER-SHIELD, TYPE F	
9-PIN	± 0.1		Z-PACK	2mm HM 8 ROW, FEMALE (INTEGRATED VERSION)
9-PIN	± 0.1		SIZE	CAGE CODE DRAWING NO
9-PIN	± 0.1		A1	00779 C646493
9-PIN	± 0.1		WEIGHT	—
MATERIAL	SEE TABLE		RESTRICTED TO	
			CUSTOMER DRAWING	5:1 SHEET 1 OF 1 REV G

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)