
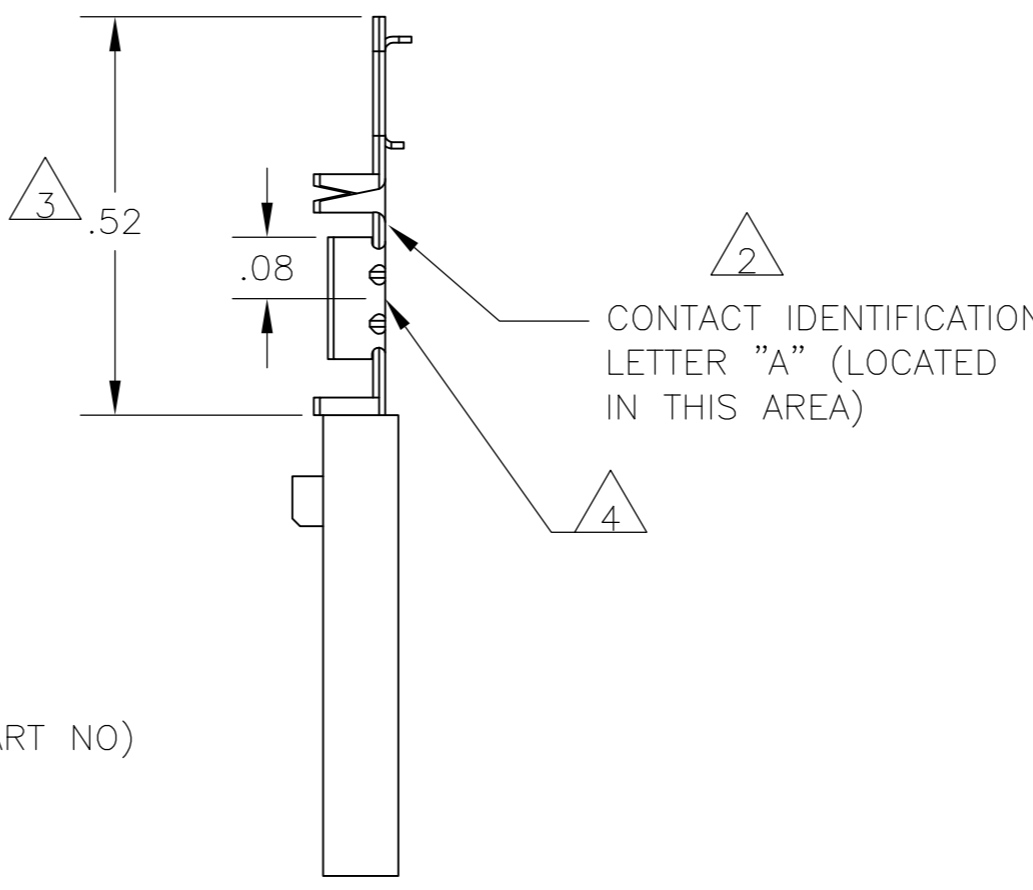



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
AD	00		H	EC 0G3C 0759 04	03FEB05	BSV	JLG
			H1	REVISED PER ECO-09-020689	02SEP09	KK	AEG

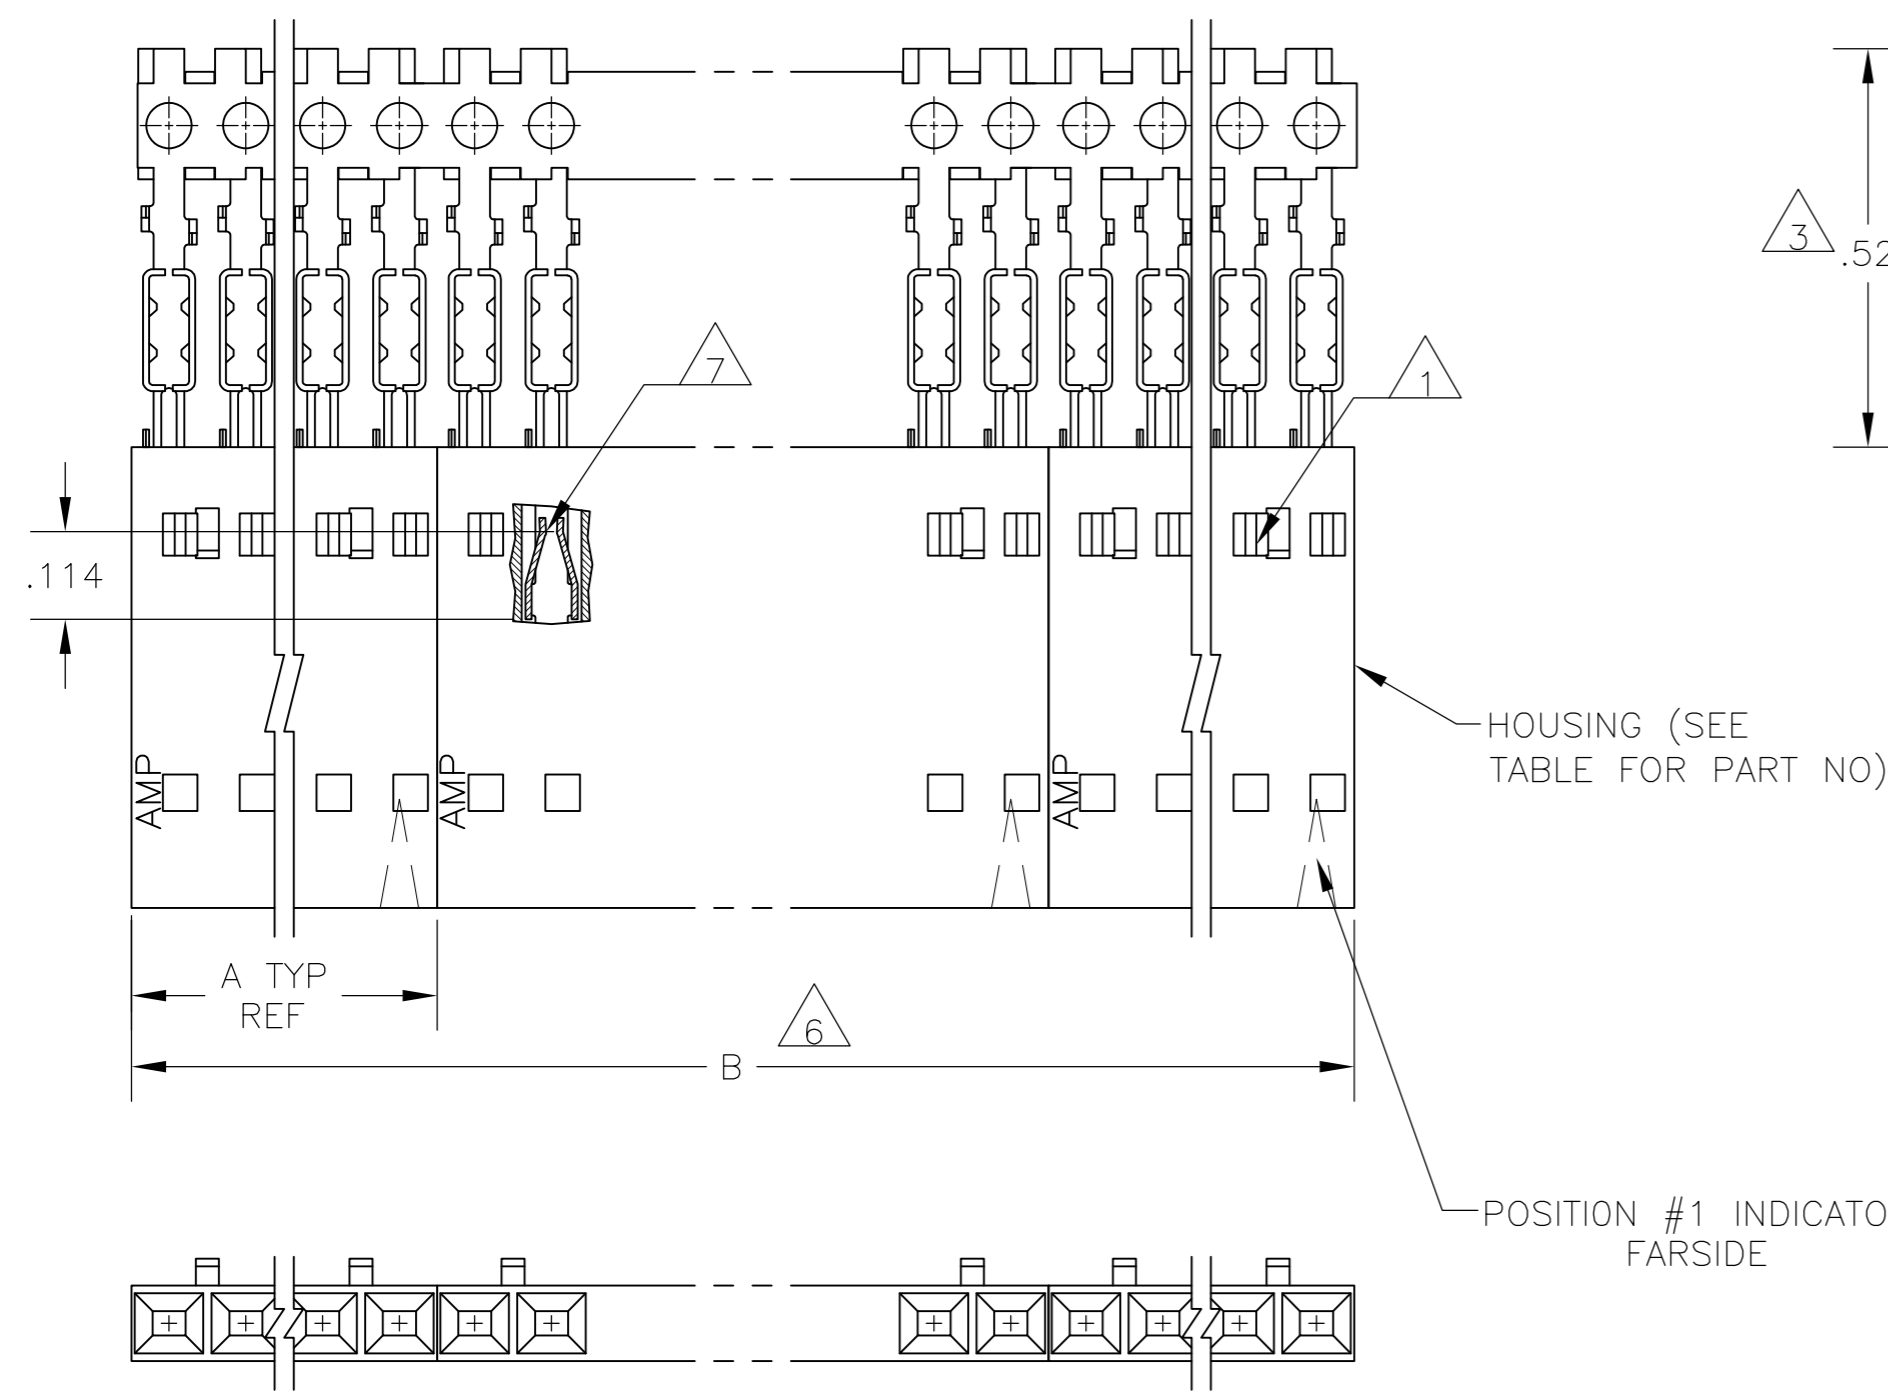

- △1 CONTACTS ARE LATCHED INTO THE PRELOAD WINDOWS
- △2 USE WITH #26-#30 AWG WIRE SIZE, .054/.030 INSULATION DIAMETER, .015 MAXIMUM INSULATION THICKNESS
- △3 THE DIMENSION APPLIES WITH THE FORWARD PRELOAD STOP IN CONTACT WITH THE HOUSING SURFACE
- △4 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 5 FOR INDIVIDUAL ASSEMBLIES SEE PART NUMBER 103901
- △6 ASSEMBLIES ARE JOINED BY THE CARRIER STRIP. ORDER QUANTITY REFLECTS TOTAL NUMBER OF INDIVIDUAL ASSEMBLIES REQUIRED. SEE TABLE FOR NUMBER OF ASSEMBLIES PER STRIP.
- △7 POINT OF MEASUREMENT FOR PLATING THICKNESS (INSIDE BEAMS)
- △8 MAXIMUM ALLOWABLE BOW OF ASSEMBLY NOT TO EXCEED .055.
- △9 CONTACTS: .000030 GOLD IN THE CONTACT AREA, .000050-.000100 BRIGHT TIN-LEAD ON THE TERMINATION AREA, ALL OVER .000050 NICKEL
- △10 CONTACTS: .000030 GOLD IN THE CONTACT AREA, .000050-.000100 MATTE TIN ON THE TERMINATION AREA, ALL OVER .000050 NICKEL
- △11 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

△11 OBSOLETE	△10	2	2.40	1.198	1-103648-1	12	6-103973-1
△11 OBSOLETE	△10	2	2.20	1.098	1-103648-0	11	6-103973-0
	△10	2	2.00	.998	103648-9	10	5-103973-9
△11 OBSOLETE	△10	2	1.80	.898	103648-8	9	5-103973-8
△11 OBSOLETE	△10	2	1.60	.798	103648-7	8	5-103973-7
△11 OBSOLETE	△10	2	1.40	.698	103648-6	7	5-103973-6
△11 OBSOLETE	△10	4	2.39	.598	103648-5	6	5-103973-5
	△10	4	1.99	.498	103648-4	5	5-103973-4
	△10	5	1.99	.398	103648-3	4	5-103973-3
	△10	8	2.40	.298	103648-2	3	5-103973-2
	△10	10	2.00	.198	103648-1	2	5-103973-1
△11 OBSOLETE	△9	2	2.40	1.198	1-103648-1	12	1-103973-1
△11 OBSOLETE	△9	2	2.20	1.098	1-103648-0	11	1-103973-0
	△9	2	2.00	.998	103648-9	10	103973-9
△11 OBSOLETE	△9	2	1.80	.898	103648-8	9	103973-8
△11 OBSOLETE	△9	2	1.60	.798	103648-7	8	103973-7
△11 OBSOLETE	△9	2	1.40	.698	103648-6	7	103973-6
△11 OBSOLETE	△9	4	2.39	.598	103648-5	6	103973-5
	△9	4	1.99	.498	103648-4	5	103973-4
	△9	5	1.99	.398	103648-3	4	103973-3
	△9	8	2.40	.298	103648-2	3	103973-2
	△9	10	2.00	.198	103648-1	2	103973-1

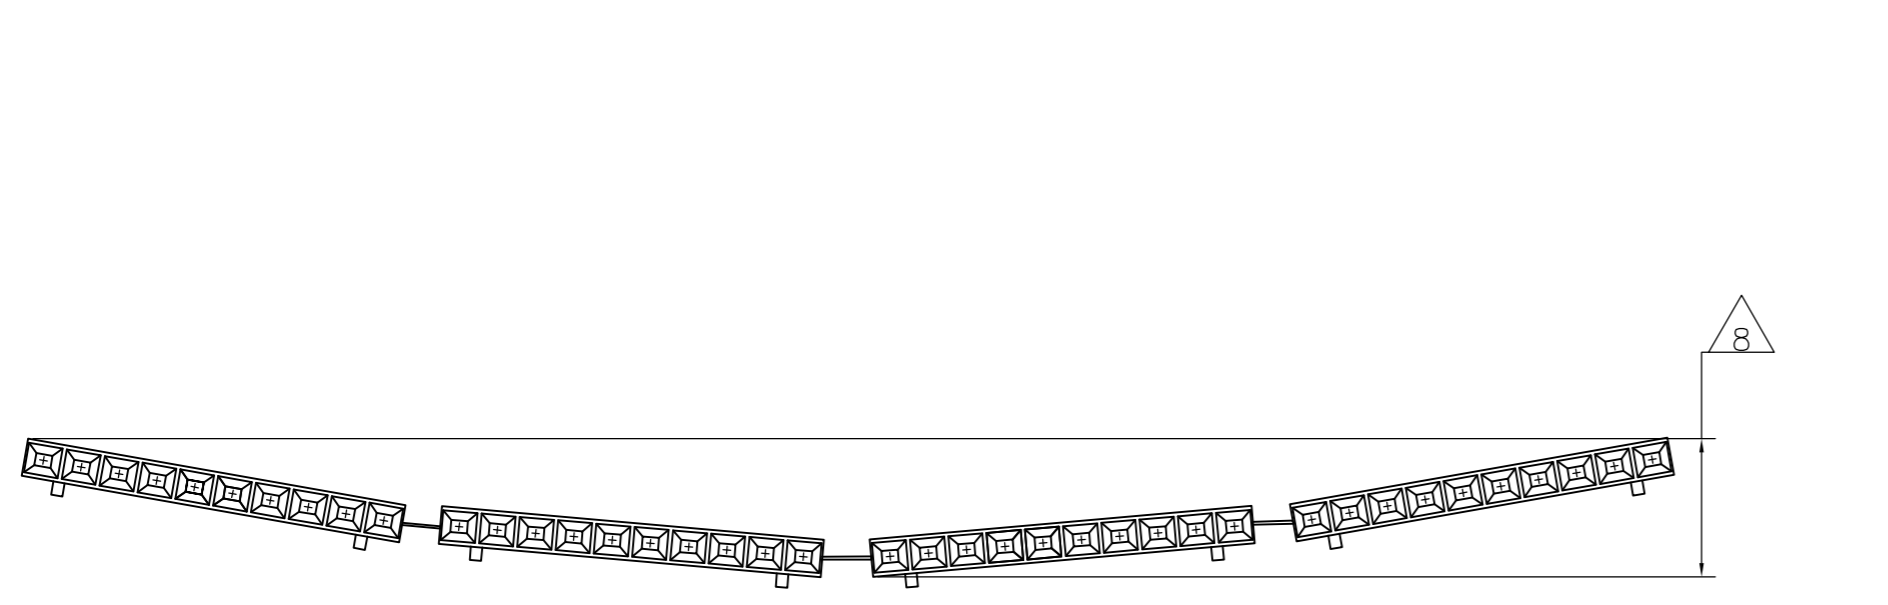

EXMPL: STRIP ASSEMBLY
SCALE 2:1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L. MAYER 05 NOV 1986	Tyco Electronics Corporation Harrisburg, Pa 17105-3608	
DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	CHK P.C.DEJONG 12-11-86	NAME RCPT ASSY, AMPMODU MTE, SINGLE ROW, .100 CL, WITH GUIDE RIBS, FOR #26-#30 AWG WIRE SIZE, STRIP FORM	
	0 PLC ± - 1 PLC ± - 2 PLC ± .02 3 PLC ± .005 4 PLC ± - ANGLES ± -	APVD J SCHIFFEER 13-11-86	PRODUCT SPEC 108-25034	RESTRICTED TO
MATERIALS: HOUSING: FLAME RETARDANT THERMOPLASTIC, COLOR:BLACK, CONTACT: PHOSPHOR BRONZE	FINISH SEE TABLE	APPLICATION SPEC 114-25026	WEIGHT -	SIZE A2
		CUSTOMER DRAWING	CAGE CODE 00779	DRAWING NO C=103973
		SCALE 4:1		SHEET 1 OF 1
				REV H1

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)