

THIS DRAWING IS UNPUBLISHED.





RELEASED FOR PUBLICATION

© COPYRIGHT 2016 By Tyco Electronics Japan G.K.

ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
E4	OBSOLETE 2--1	ECR-16-003021	16AUG16	KF	HY

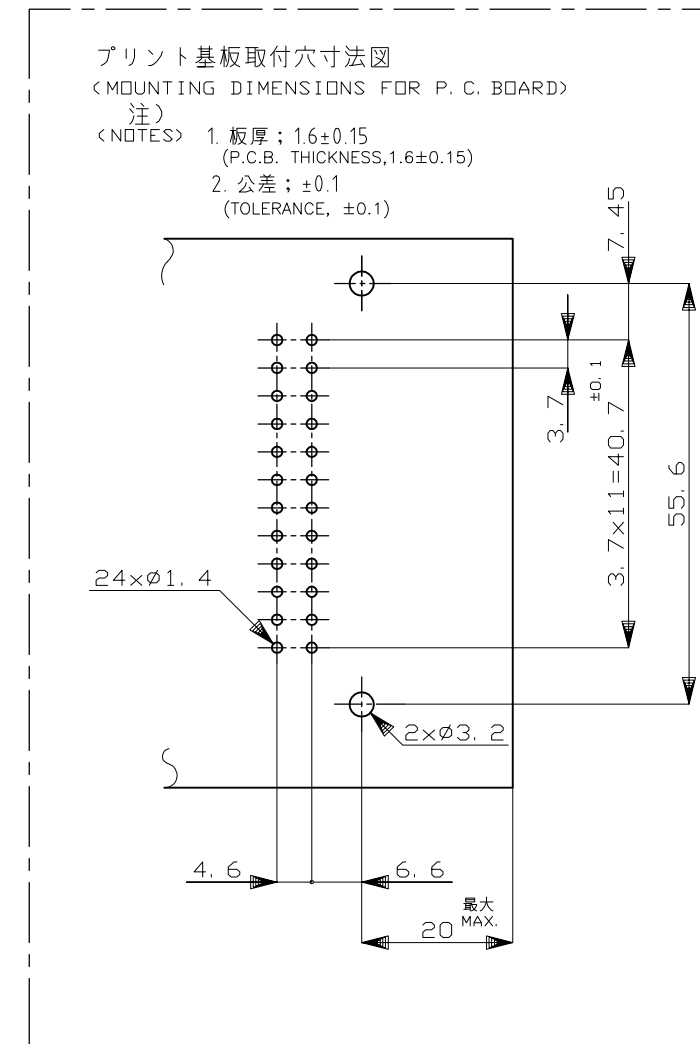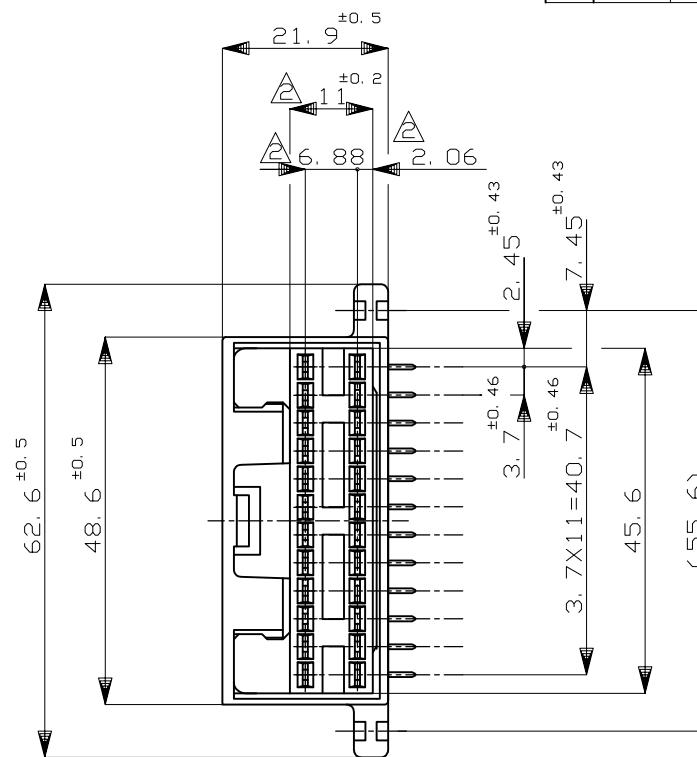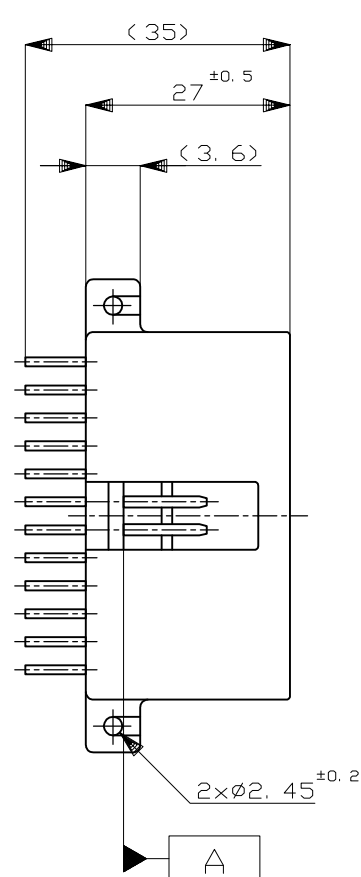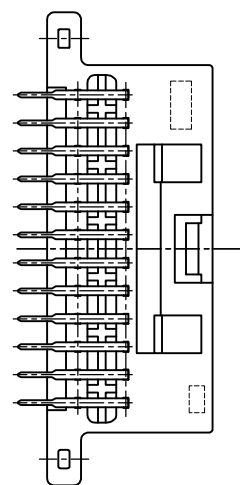

1. 嵌合相手ハウジング ; 172317


△ A 面より2mmの範囲で測定のこと

△ 全面ニッケルメッキ上に接触部分は金めっき
ハンダ付け部は、ハンダメッキ

4. 推奨取付けねじ ; JIS B 1115 又は、1122 タッピングねじに
なべ1種又は2種、呼び径3で締付けた後、ハンダ付けをする

△ 金及び、錫めっき混合タイプの金めっき配置図
下図参照のこと

6. 適用製品規格 No.108-5157

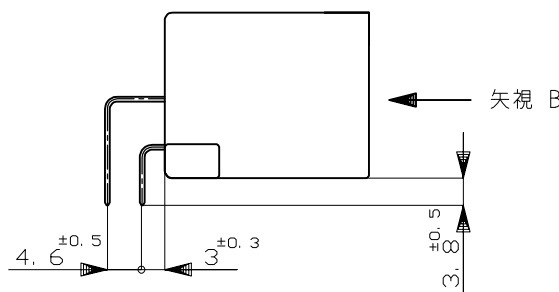


1 THE MATING PLUG HSG PART NUMBER ; 172317

△ TO BE MEASURED WITHIN 2mm FROM A

△ GOLD PLATING FOR CONTACT AREA AND TIN-LEAD
PLATING FOR SOLDERING AREA OVER ALL-OVER
NICKEL PLATING.

4 RECOMMENDED MOUNTING SCREW; 3mmDIA, PAN HEAD,
CLASS 1&2 TAPPING SCREW SPECIFIED IN JIS
B1115, B1122

△ LAYOUT OF GOLD PLATING CONTACTS ; ⊠ MARK
(MIXED GOLD PLATING AND PRE-TINNED CONTACTS)



(VIEW FROM "B" DIRECTION)

6 APPLICABLE PRODUCT. SPEC NO. 108-5157

OBSOLETE	△	SELECTIVE TIN (MATTE)	SELECTIVE GOLD	自然色	2-5172730-1
			SELECTIVE TIN (BRIGHT)	NATURAL	
OBSOLETE	---	TIN-LEAD		自然色	4-172730-1
OBSOLETE	△	PRE-TIN	SELECTIVE GOLD △	自然色	2-172730-1
OBSOLETE	---	TIN-LEAD	SELECTIVE GOLD △	黄色	1-172730-7
OBSOLETE	---	TIN-LEAD	SELECTIVE GOLD △	灰色	1-172730-6
OBSOLETE	---	TIN-LEAD	SELECTIVE GOLD △	自然色	1-172730-1
			PRE-TIN	自然色	172730-1
		半田付け部 SOLDERING SIDE	嵌合部側 CONTACT SIDE	ハウジング色 HOUSING COLOR	型番 PART NUMBER
		金めっき配置図 LAYOUT OF GOLD PL. CONTACT		CONTACTS 仕上 CONTACT FINISH	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN T.SHINOHARA 09MAY07
CHK K.BETSUI 09MAY07
APVD K.BETSUI 09MAY07

PRODUCT SPEC 製品規格
APPLICATION SPEC 取付適用規格

WEIGHT 16.6 g

CUSTOMER DRAWING

SCALE 1:1 SHEET 1 OF 1 REV E4

RESTRICTED TO

STE TE Connectivity

PULSE LOCK CONNECTOR
24POSITION CAP HOUSING ASSEMBLY

SIZE A3 CAGE CODE 00779 DRAWING NO. C-172730

一般公差 (GENERAL TOLERANCE)	
10以下	±0.2
10以上 30以下	±0.25
30以上 100以下	±0.3
角度	±3°

MATERIAL 材料
HSG: PBT
CONTACT: BRASS

FINISH 仕上
-

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)