


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
AD	00	J		EC 0G3C 0771 04	29DEC04	BSV	JLG
		J1		REVISED PER ECO-09-020689	01SEP09	KK	AEG

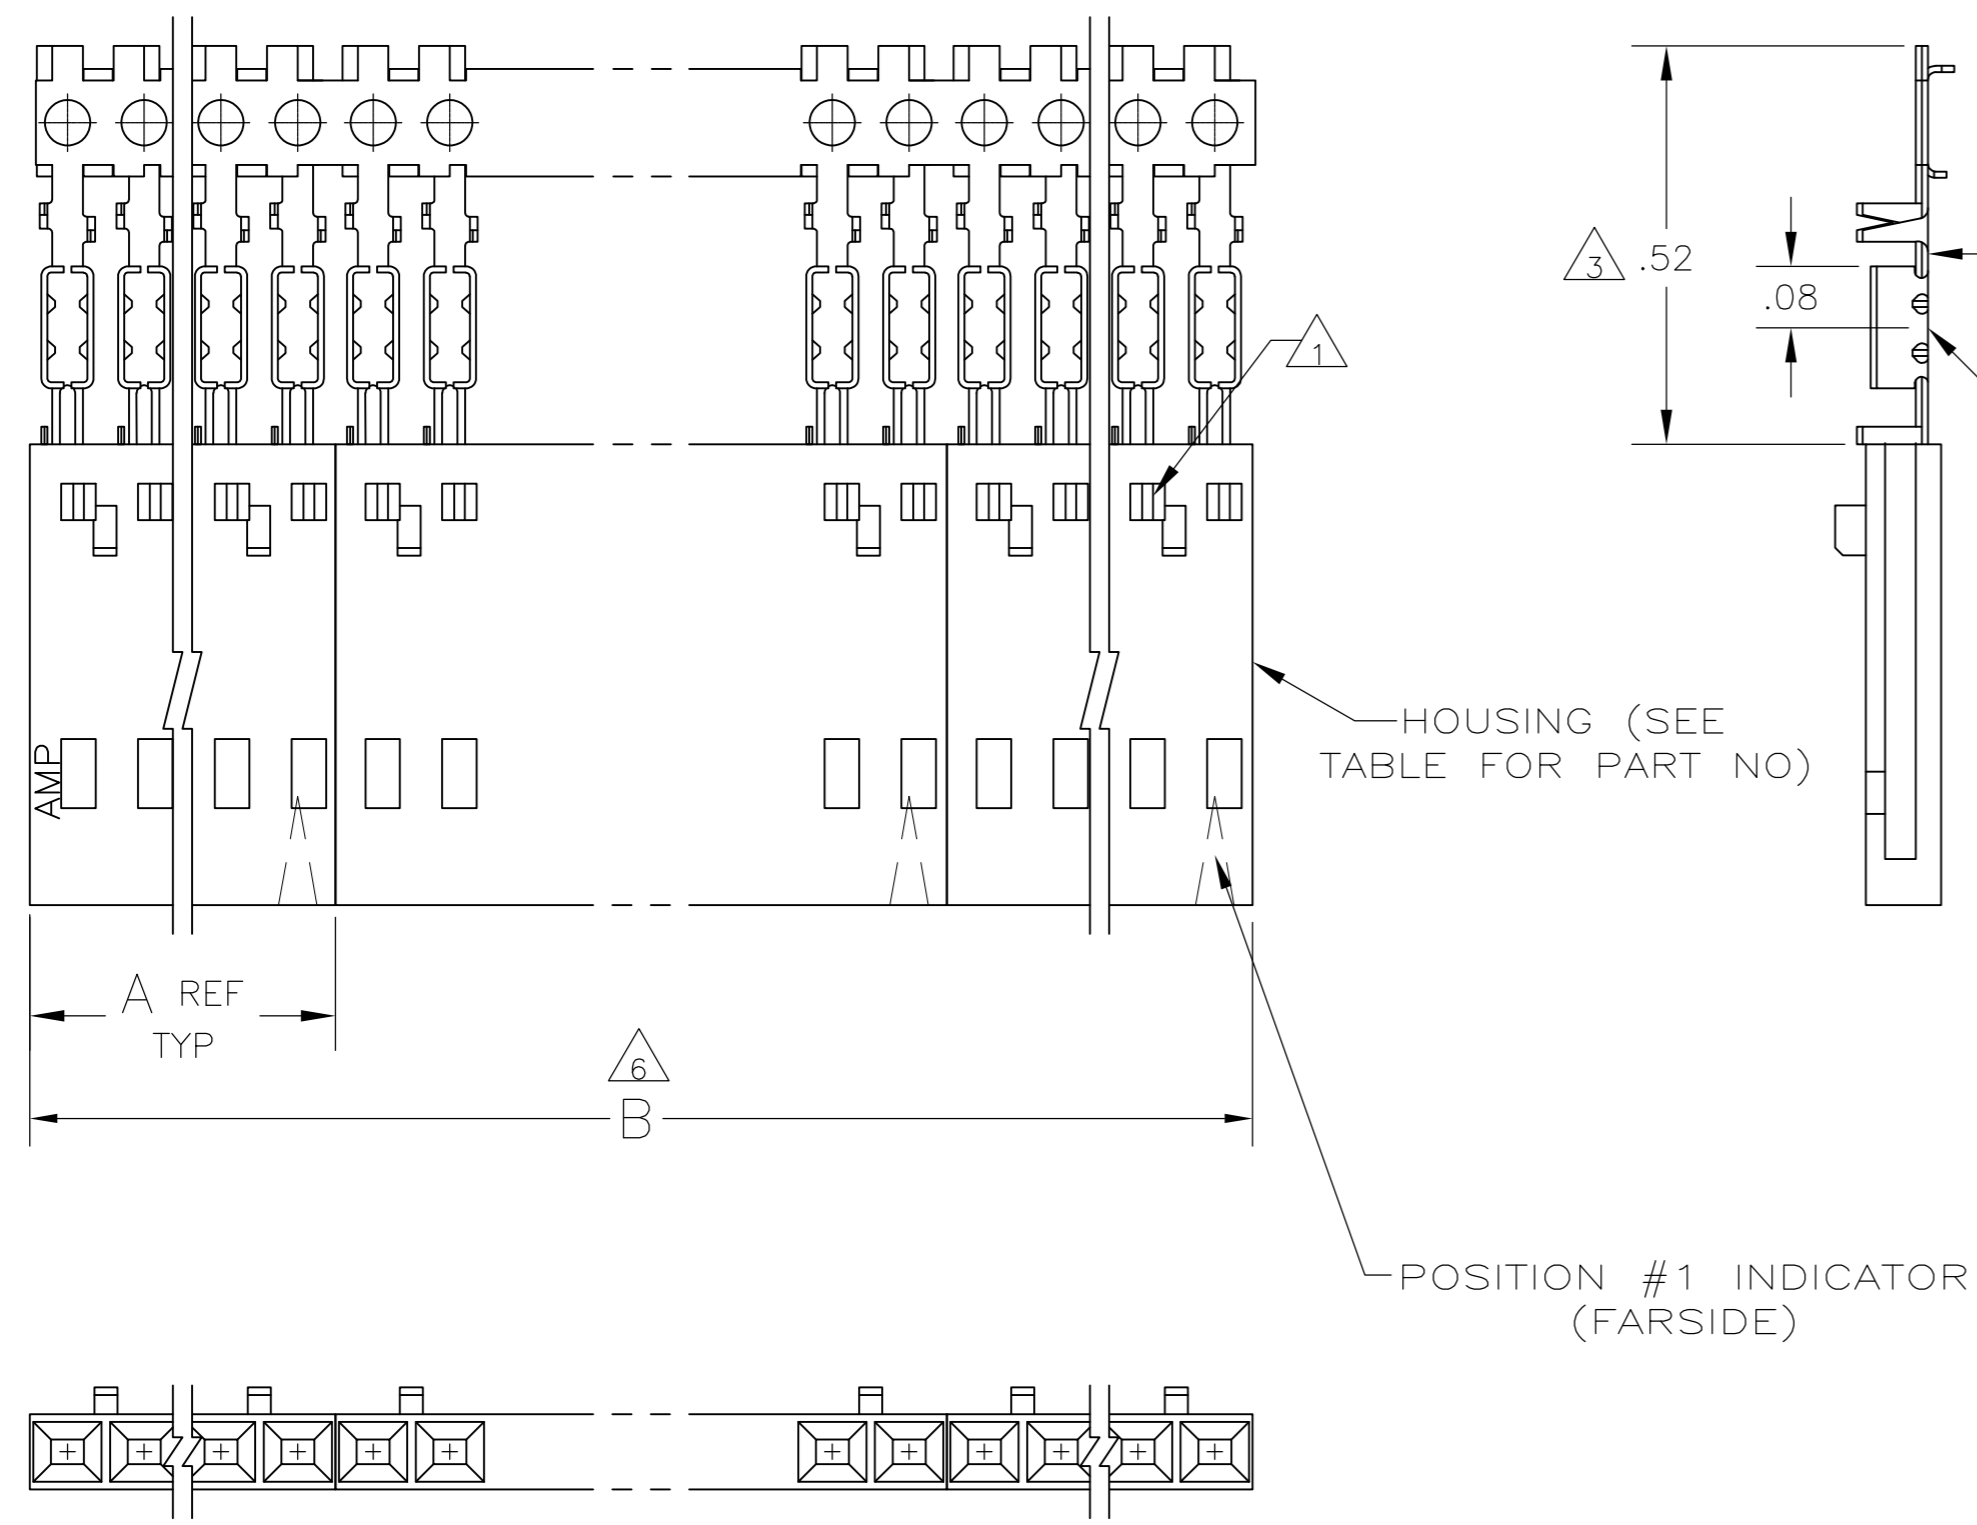

9	OBSOLETE	8	2	2.40	1.198	1-104503-1	12	6-103953-1
9	OBSOLETE	8	2	2.20	1.098	1-104503-0	11	6-103953-0
9	OBSOLETE	8	2	2.00	.998	104503-9	10	5-103953-9
9	OBSOLETE	8	2	1.80	.898	104503-8	9	5-103953-8
9	OBSOLETE	8	2	1.60	.798	104503-7	8	5-103953-7
9	OBSOLETE	8	2	1.40	.698	104503-6	7	5-103953-6
9	OBSOLETE	8	4	2.39	.598	104503-5	6	5-103953-5
		8	4	1.99	.498	104503-4	5	5-103953-4
		8	5	1.99	.398	104503-3	4	5-103953-3
		8	5	1.49	.298	104503-2	3	5-103953-2
		8	10	1.98	.198	104503-1	2	5-103953-1
9	OBSOLETE	7	2	2.40	1.198	1-104503-1	12	1-103953-1
9	OBSOLETE	7	2	2.20	1.098	1-104503-0	11	1-103953-0
9	OBSOLETE	7	2	2.00	.998	104503-9	10	103953-9
9	OBSOLETE	7	2	1.80	.898	104503-8	9	103953-8
9	OBSOLETE	7	2	1.60	.798	104503-7	8	103953-7
9	OBSOLETE	7	2	1.40	.698	104503-6	7	103953-6
8	OBSOLETE	7	4	2.39	.598	104503-5	6	103953-5
9	SUPERSEDED	7	4	1.99	.498	104503-4	5	103953-4
9	SUPERSEDED	7	5	1.99	.398	104503-3	4	103953-3
9	OBSOLETE	7	5	1.49	.298	104503-2	3	103953-2
		7	10	1.98	.198	104503-1	2	103953-1
PLATING	6	B	A	HOUSING PART NUMBER	NO OF POSN	ASSEMBLY PART NUMBER ON STRIP		

- 1 CONTACTS ARE LATCHED INTO THE PRELOAD WINDOWS
- 2 USE WITH #26-#30 AWG WIRE SIZE, .054/.030 INSULATION DIAMETER, .015 MAXIMUM INSULATION THICKNESS
- 3 THE DIMENSION APPLIES WITH THE FORWARD PRELOAD STOP IN CONTACT WITH THE HOUSING SURFACE
- 4 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 5 FOR INDIVIDUAL ASSEMBLIES SEE PART NUMBER 103656
- 6 ASSEMBLIES ARE JOINED BY THE CARRIER STRIP. ORDER QUANTITY REFLECTS TOTAL NUMBER OF INDIVIDUAL ASSEMBLIES REQUIRED. SEE TABLE FOR NUMBER OF ASSEMBLIES PER STRIP.
- 7 FINISH: PINS: .000100-.000200 BRIGHT TIN-LEAD OVER .000050 NICKEL
- 8 FINISH: PINS: .000100-.000200 MATTE TIN OVER .000050 NICKEL
- 9 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN	L.MAYER	5-11-86
CHK	P.C.DEYONG	12-11-86
APVD	P.C.DEYONG	12-11-86

NAME: P.C. DEYONG

PRODUCT SPEC: 108-25034

APPLICATION SPEC: 114-25026

WEIGHT: -

MATERIAL: HOUSING: FLAME RETARDANT THERMOPLASTIC, COLOR: BLACK, PINS: PHOS BRONZE

FINISH: SEE TABLE

SCALE: 4:1

SHEET 1 OF 1

REV J1

Tyco Electronics Corporation
Harrisburg, Pa 17105-3608

PIN ASSEMBLY, AMPMODU MTE, SINGLE ROW, .100 C/L, GUIDE RIBS, FOR #26-#30 AWG WIRE SIZE, STRIP FORM

SIZE: A2 CAGE CODE: 00779 DRAWING NO: 103953 RESTRICTED TO: -

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)