


DESIGNED FOR USE WITH RG-405/U CABLE	
CABLE ENTRY DIAMETER MINIMUM	
HOUSING	.089 (2.26)
CONTACT	.023 (0.58)

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
020	REVISED; ECN 97-0063-1	3/6/97	[Signature]

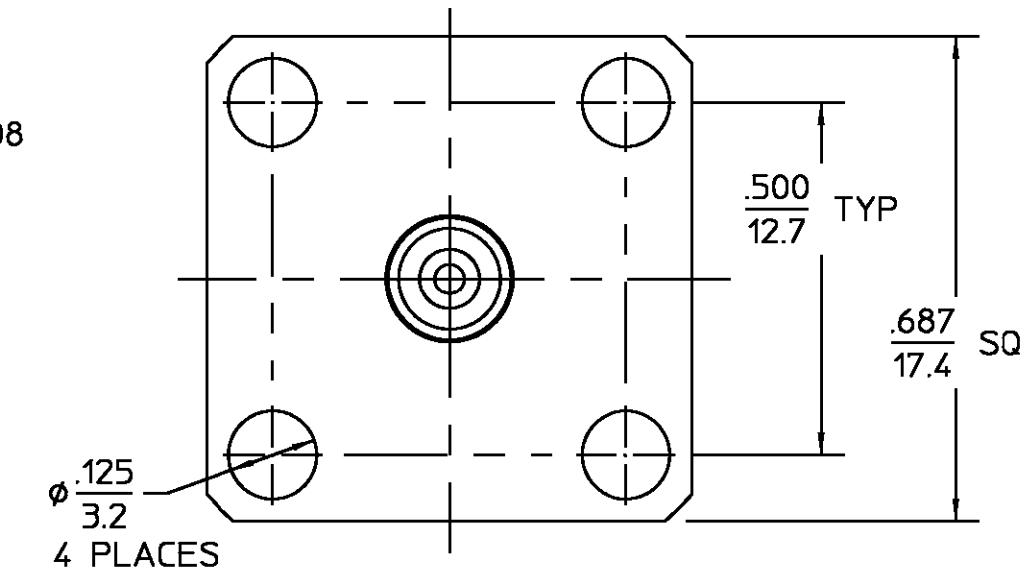

NOTES:
1. CAPTURED CENTER CONTACT

ELECTRICAL	MECHANICAL	ENVIRONMENTAL
Nominal Impedance (Ohms) <u>50</u>	Interface Dimensions MIL-STD-348A, Fig. 313.2	Temperature Rating <u>-65°C to +105°C</u>
Frequency Range (GHz) <u>DC to 15</u>	Recommended Mating Torque <u>N/A</u>	Vibration MIL-STD-202, Method 204, Condition B.
Volt Rating (VRMS MAX) @ Sea Level <u>335</u>	Mating Characteristics: Insertion (MAX Lbs) <u>2.0</u>	Shock MIL-STD-202, Method 213, Condition I.
VSWR <u>1.35 MAX</u>	Withdrawal (MIN Oz) <u>2.0</u>	Thermal Shock MIL-STD-202, Method 107, Condition B
Insertion Loss (dB MAX) <u>.06 √f(GHZ)</u>	Force to Engage and Disengage (In-Lbs MAX) <u>2.0</u>	Exept High Temp Shall Be +115°
RF Leakage (dB MIN) <u>-90 @ 2-3GHz</u>	Center Contact Captivation Axial (Lbs) <u>6.0</u>	Moisture Resistance MIL-STD-202, Method 106, and MIL-C-39012
Corona, 70,000 Ft (VRMS MIN) <u>250</u>	Radial (In-Oz) <u>N/A</u>	Corrosion - MIL-STD-202, Method 101, Condition B, 5% salt spray
Dielectric Withstanding Voltage (VRMS MIN) @ Sea Level <u>1,000</u>	Cable Retention Axial Force (Lbs MIN) <u>30.0</u>	
Contact Resistance (Milliohms MAX) Center Contact <u>1.5</u>	Torque (In-Oz) <u>N/A</u> <u>16.0</u>	
Outer Contact <u>0.2</u>	Weight (Grams) <u>TBD</u>	
Cable to Housing <u>0.5</u>		
RF High Potential @ Sea Level (VRMS MIN @ 5 MHz) <u>670</u>		
LR.(Megohms MIN) <u>5,000</u>		

COMPONENT	MATERIAL	FINISH
HOUSING	STAINLESS STEEL PER ASTM-A484 AND ASTM- A582, TYPE 303	GOLD PLATE PER MIL-G-45204
DIELECTRIC	TFE FLUOROCARBON PER ASTM-D-1457	N/A
CENTER CONTACT	BERYLLIUM COPPER PER ASTM-B-196 OR ASTM-B-197, ALLOY C17300, CONDITION H	GOLD PLATE PER MIL-G-45204
PIN CONTACT	BRASS PER ASTM-B-16, HALF HARD	GOLD PLATE PER MIL-G-45204

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCE ON

FRAC.	DEC.	ANGLES
± 1/64	±.005	± °

These drawings and specifications are the property of M/A-COM Incorporated and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale of item(s) without written permission.

USE ASS'Y PROCEDURE
408-04747
NO. AP. (31-156)

DRAWN BY [Signature] DATE 12/20/96
CHECKED BY [Signature]
APPD BY [Signature] 3/7/97

AMP Incorporated
140 Fourth Avenue
Waltham, MA 02451-7599

TITLE "TNC" 4 HOLE FLANGE
MOUNT CABLE JACK
DIRECT SOLDER

SIZE B	CODE IDENT NO. 26805	3106-5074-00	REV 020
-----------	-------------------------	--------------	------------

SCALE 4 : 1 SHEET 1 OF 1

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)