



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
AD	00	G1	REVISED PER ECO-09-024717	05NOV09	KK AEG


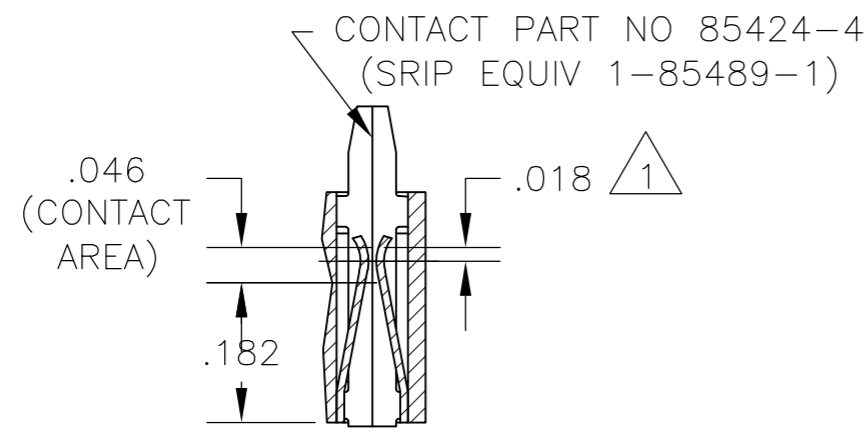


SECTION X-X

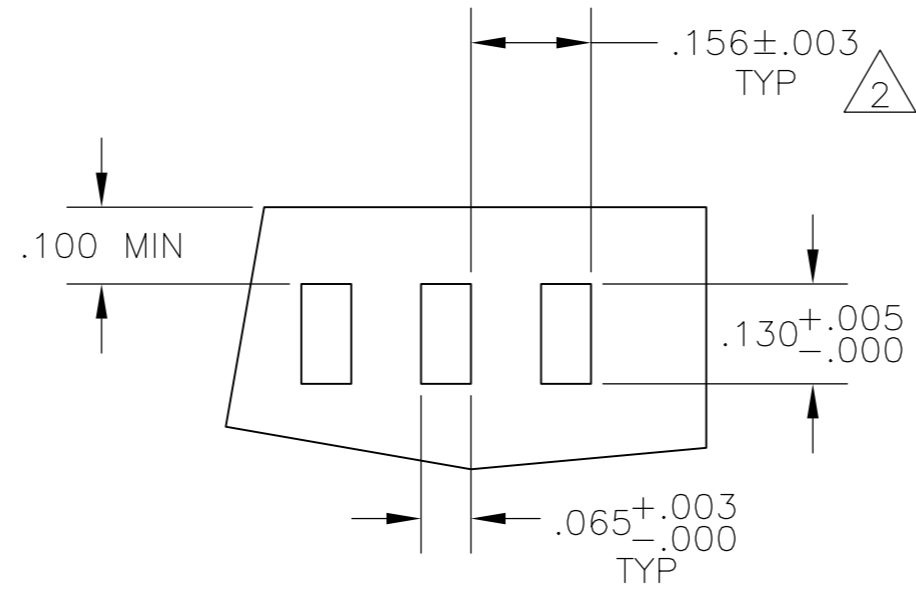

RECOMMENDE BOARD MOUNTING
 (RECOMMENDE BOARD THICKNESS: .055-.070)

- 1 POINT OF MEASUREMENT FOR PLATING THICKNESS (INSIDE OF BEAMS).
- 2 TOLERANCE NON-CUMULATIVE.
- 3 THE MATING END OF THE CONTACT IS IDENTIFIED BY THE LETTER "A" STAMPED ON THE RECEPTACLE BOX.
- 4 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

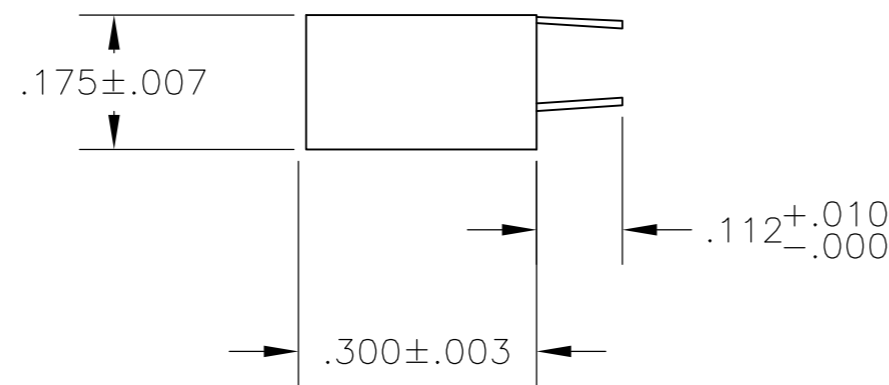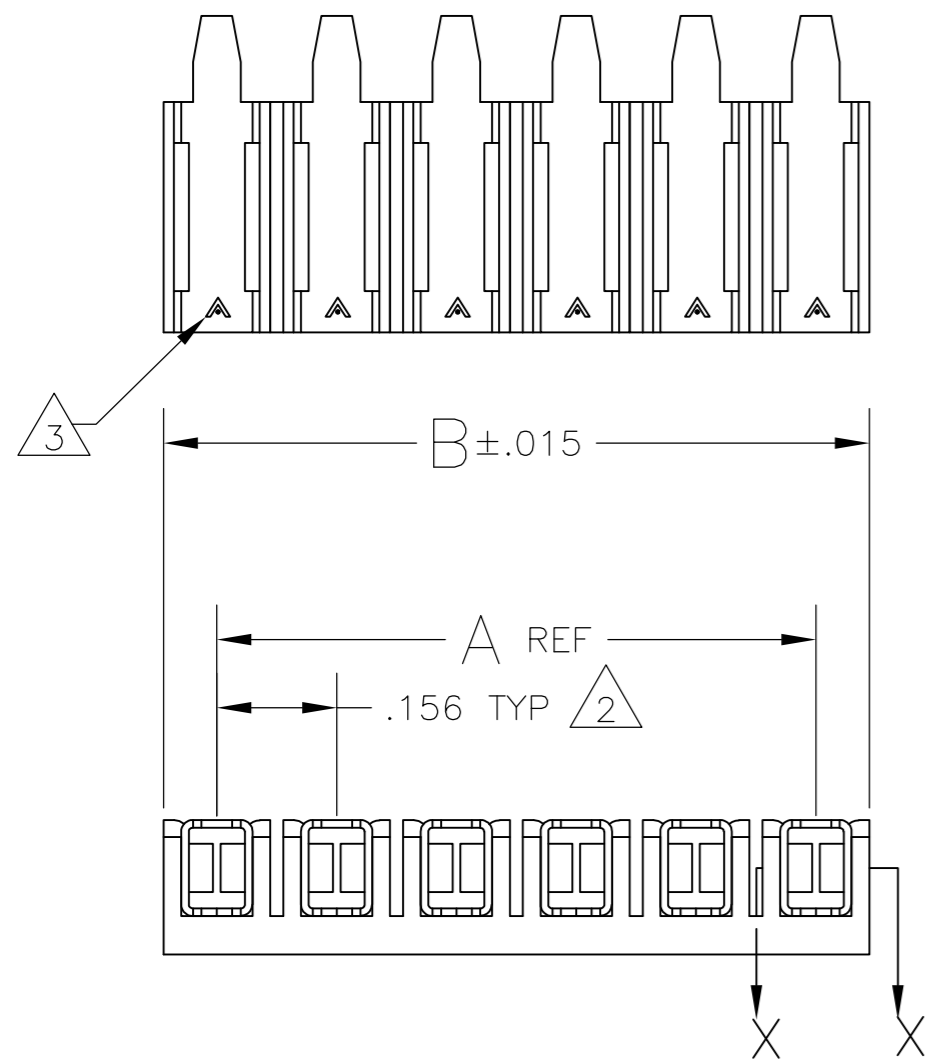

4	OBSELETE	1.404	1.248	9	102706-2
		.936	.780	6	102706-1
		B	A	NO OF POSN	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	09JUL85	Tyco Electronics Corporation Harrisburg, PA 17105-3608
DIMENSIONS: INCHES		CHK	09JUL85	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	09JUL85	
0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± .005 4 PLC ± - ANGLES ± -		NAME	D T CASEY	
MATERIAL HOUSING-FLAME RETARDANT THERMOPLASTIC, COLOR-BLACK CONTACTS: PHOS BRONZE		PRODUCT SPEC		ASSEMBLY, MOD I, BOARD MOUNT RECP, .156CL, STANDARD PRESSURE, TYP B, FOR RECTANGULAR HOLE MOUNTING
FINISH .000015 GOLD IN THE CONTACT AREA, GOLD FLASH ON THE RETARDER, ALL OVER .000050 NICKEL		APPLICATION SPEC		RESTRICTED TO
		WEIGHT	-	SIZE
		CUSTOMER DRAWING		CAGE CODE
		SCALE	4:1	DRAWING NO
		SHEET	1 OF 1	REV
				G1

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)