

# SPECIFICATION CONTROL DRAWING


55A7028

TITLE THREE CONDUCTOR CABLE, SHIELDED, JACKETED

Date 12-21-90

Revision

This specification sheet forms a part of the latest issue of Raychem Specification 55A.

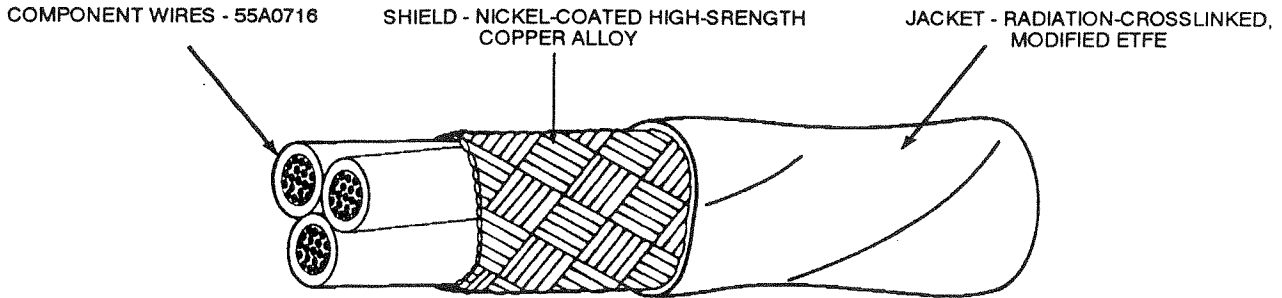

### CABLE CONSTRUCTION DETAILS

PART NUMBER	CONDUCTOR SIZE (AWG)	SHIELD SIZE (AWG)	JACKET THICKNESS (inches)		OUTSIDE DIAMETER (inches)		MAXIMUM WEIGHT (lb/1000 ft)
			MINIMUM	NOMINAL	NOMINAL	MAXIMUM	
55A7028-26-*	26	38	.006	.008	.143	.150	16.2
55A7028-24-*	24	38	.006	.008	.154	.162	19.0
55A7028-22-*	22	38	.006	.008	.167	.175	23.0
55A7028-20-*	20	38	.006	.008	.184	.193	29.4
55A7028-18-*	18	38	.006	.008	.206	.216	39.1
55A7028-16-*	16	38	.007	.009	.223	.234	46.6

### CABLE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 200°C  
 Maximum continuous conductor temperature  
 VOLTAGE RATING: 600 volts (rms)  
 ACCELERATED AGING: 300 ± 3°C for 7 hours  
 BLOCKING: 200 ± 3°C for 6 hours  
 DIELECTRIC WITHSTAND: 1500 volts, 60 Hz  
 FLAMMABILITY:  
 Procedure 1, 3 seconds (maximum); 3 in. (maximum);  
 no flaming of facial tissue  
 JACKET COLOR: White preferred  
 JACKET ELONGATION AND TENSILE STRENGTH:  
 Elongation, 50% (minimum)  
 Tensile Strength, 5000 lbf/in<sup>2</sup> (minimum)  
 JACKET FLAWS:  
 Spark Test, 1000 volts, 60 Hz (rms), 100% test  
 Impulse Dielectric Test, 6.0 kV (peak), 100% test

LIFE CYCLE: 230 ± 3°C for 500 hours  
 LOW TEMPERATURE-COLD BEND: -65 ± 3°C for 4 hours  
 SHIELD COVERAGE: 85% (minimum)  
 THERMAL SHOCK: 300 ± 3°C for 6 hours  
 VOLTAGE WITHSTAND TEST: (After Accelerated Aging,  
 Immersion, Life Cycle and Low-Temperature-Cold Bend)  
 1000 volts, 60 Hz, 1 minute

PART NUMBER:  
 The \*\*\* in the part numbers above shall be replaced by  
 color code designators with a slash separating the  
 component wire colors and a dash separating the  
 component wire colors from the jacket color.  
 Example: AWG 20, white, black and red components  
 wires; white jacket:  
 55A7028-20-9/0/2-9

Note: Nominal values are for information only.  
 Nominal values are not requirements

COLORS AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-681.

DIMENSIONS ARE IN INCHES, AND UNLESS OTHERWISE DESIGNATED ARE NOMINAL

## Raychem

Raychem Corporation  
 300 Constitution Drive, Menlo Park, California 94025  
 (415) 361 3333 TWX 910 373 1728

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)