

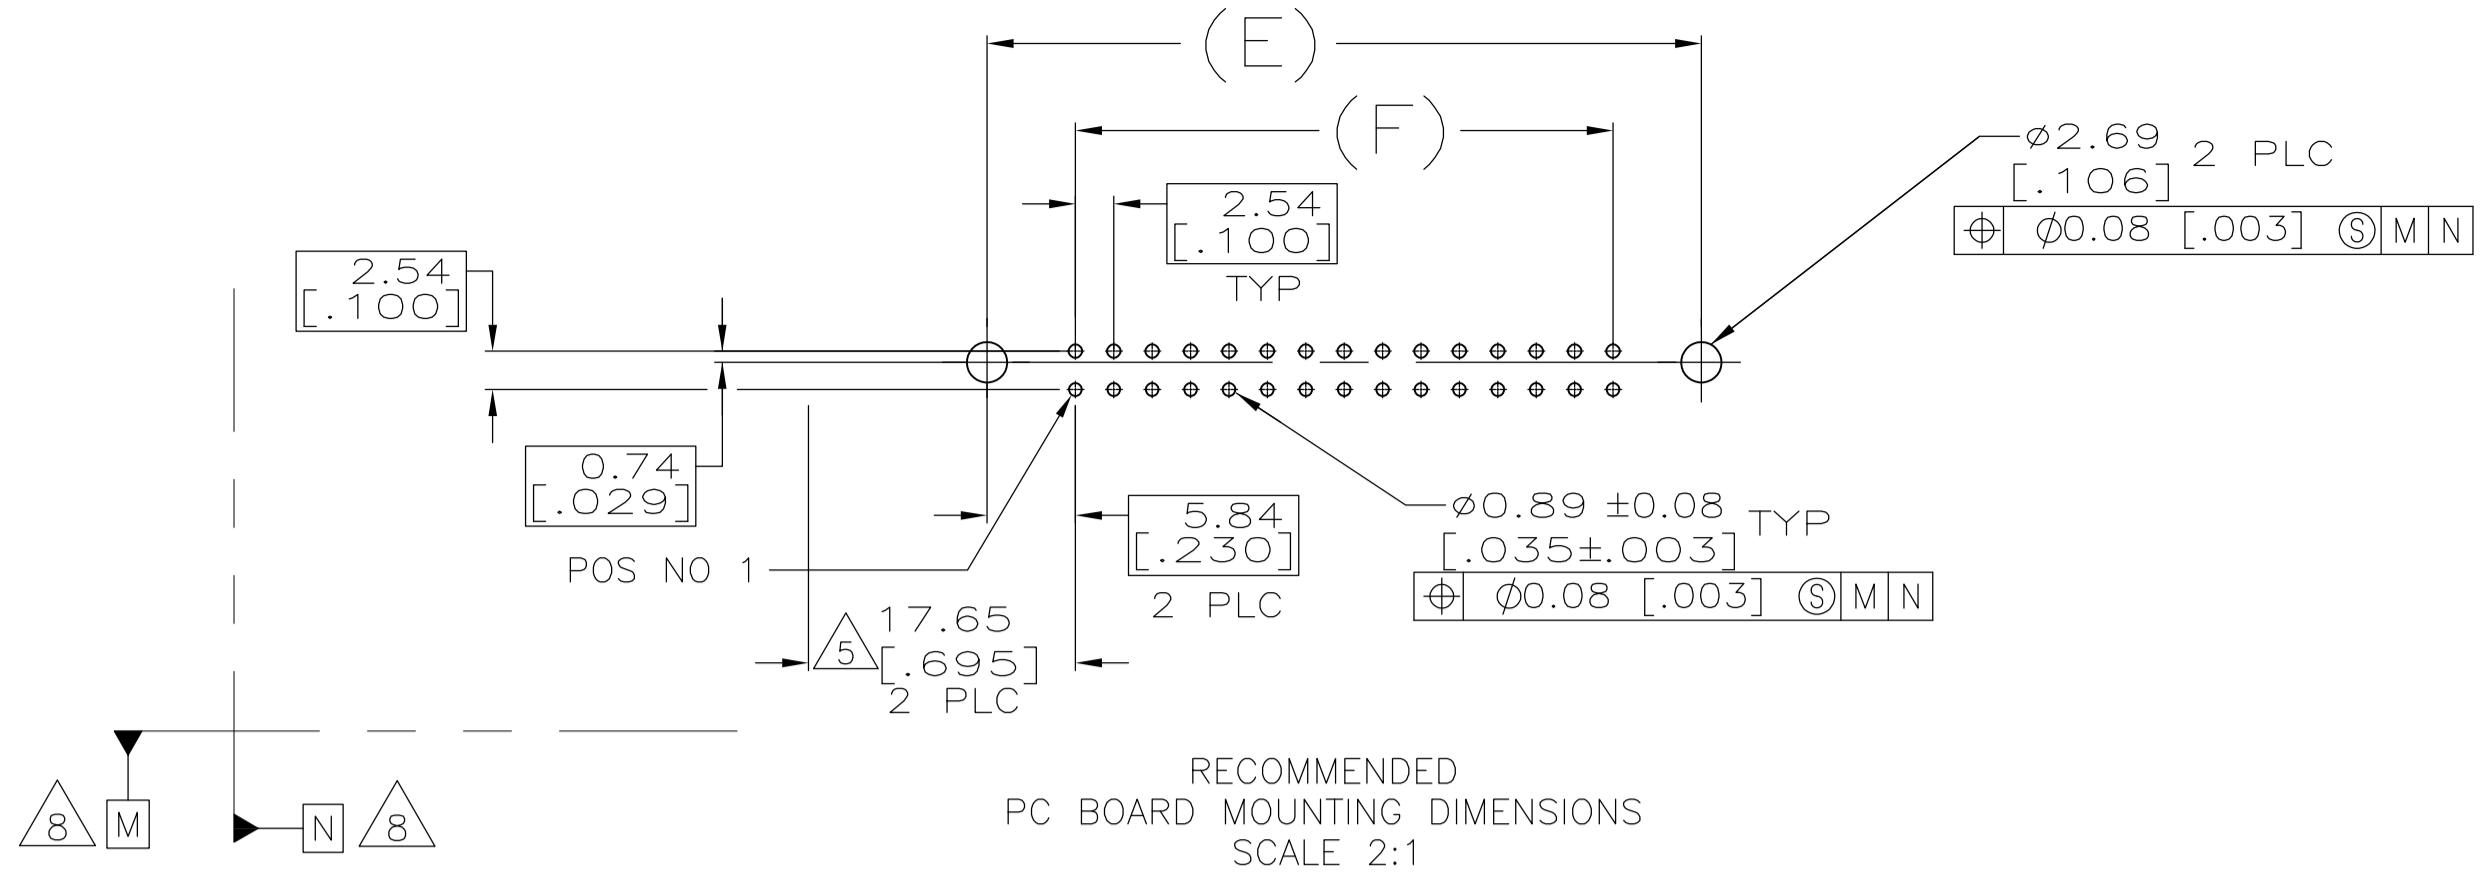
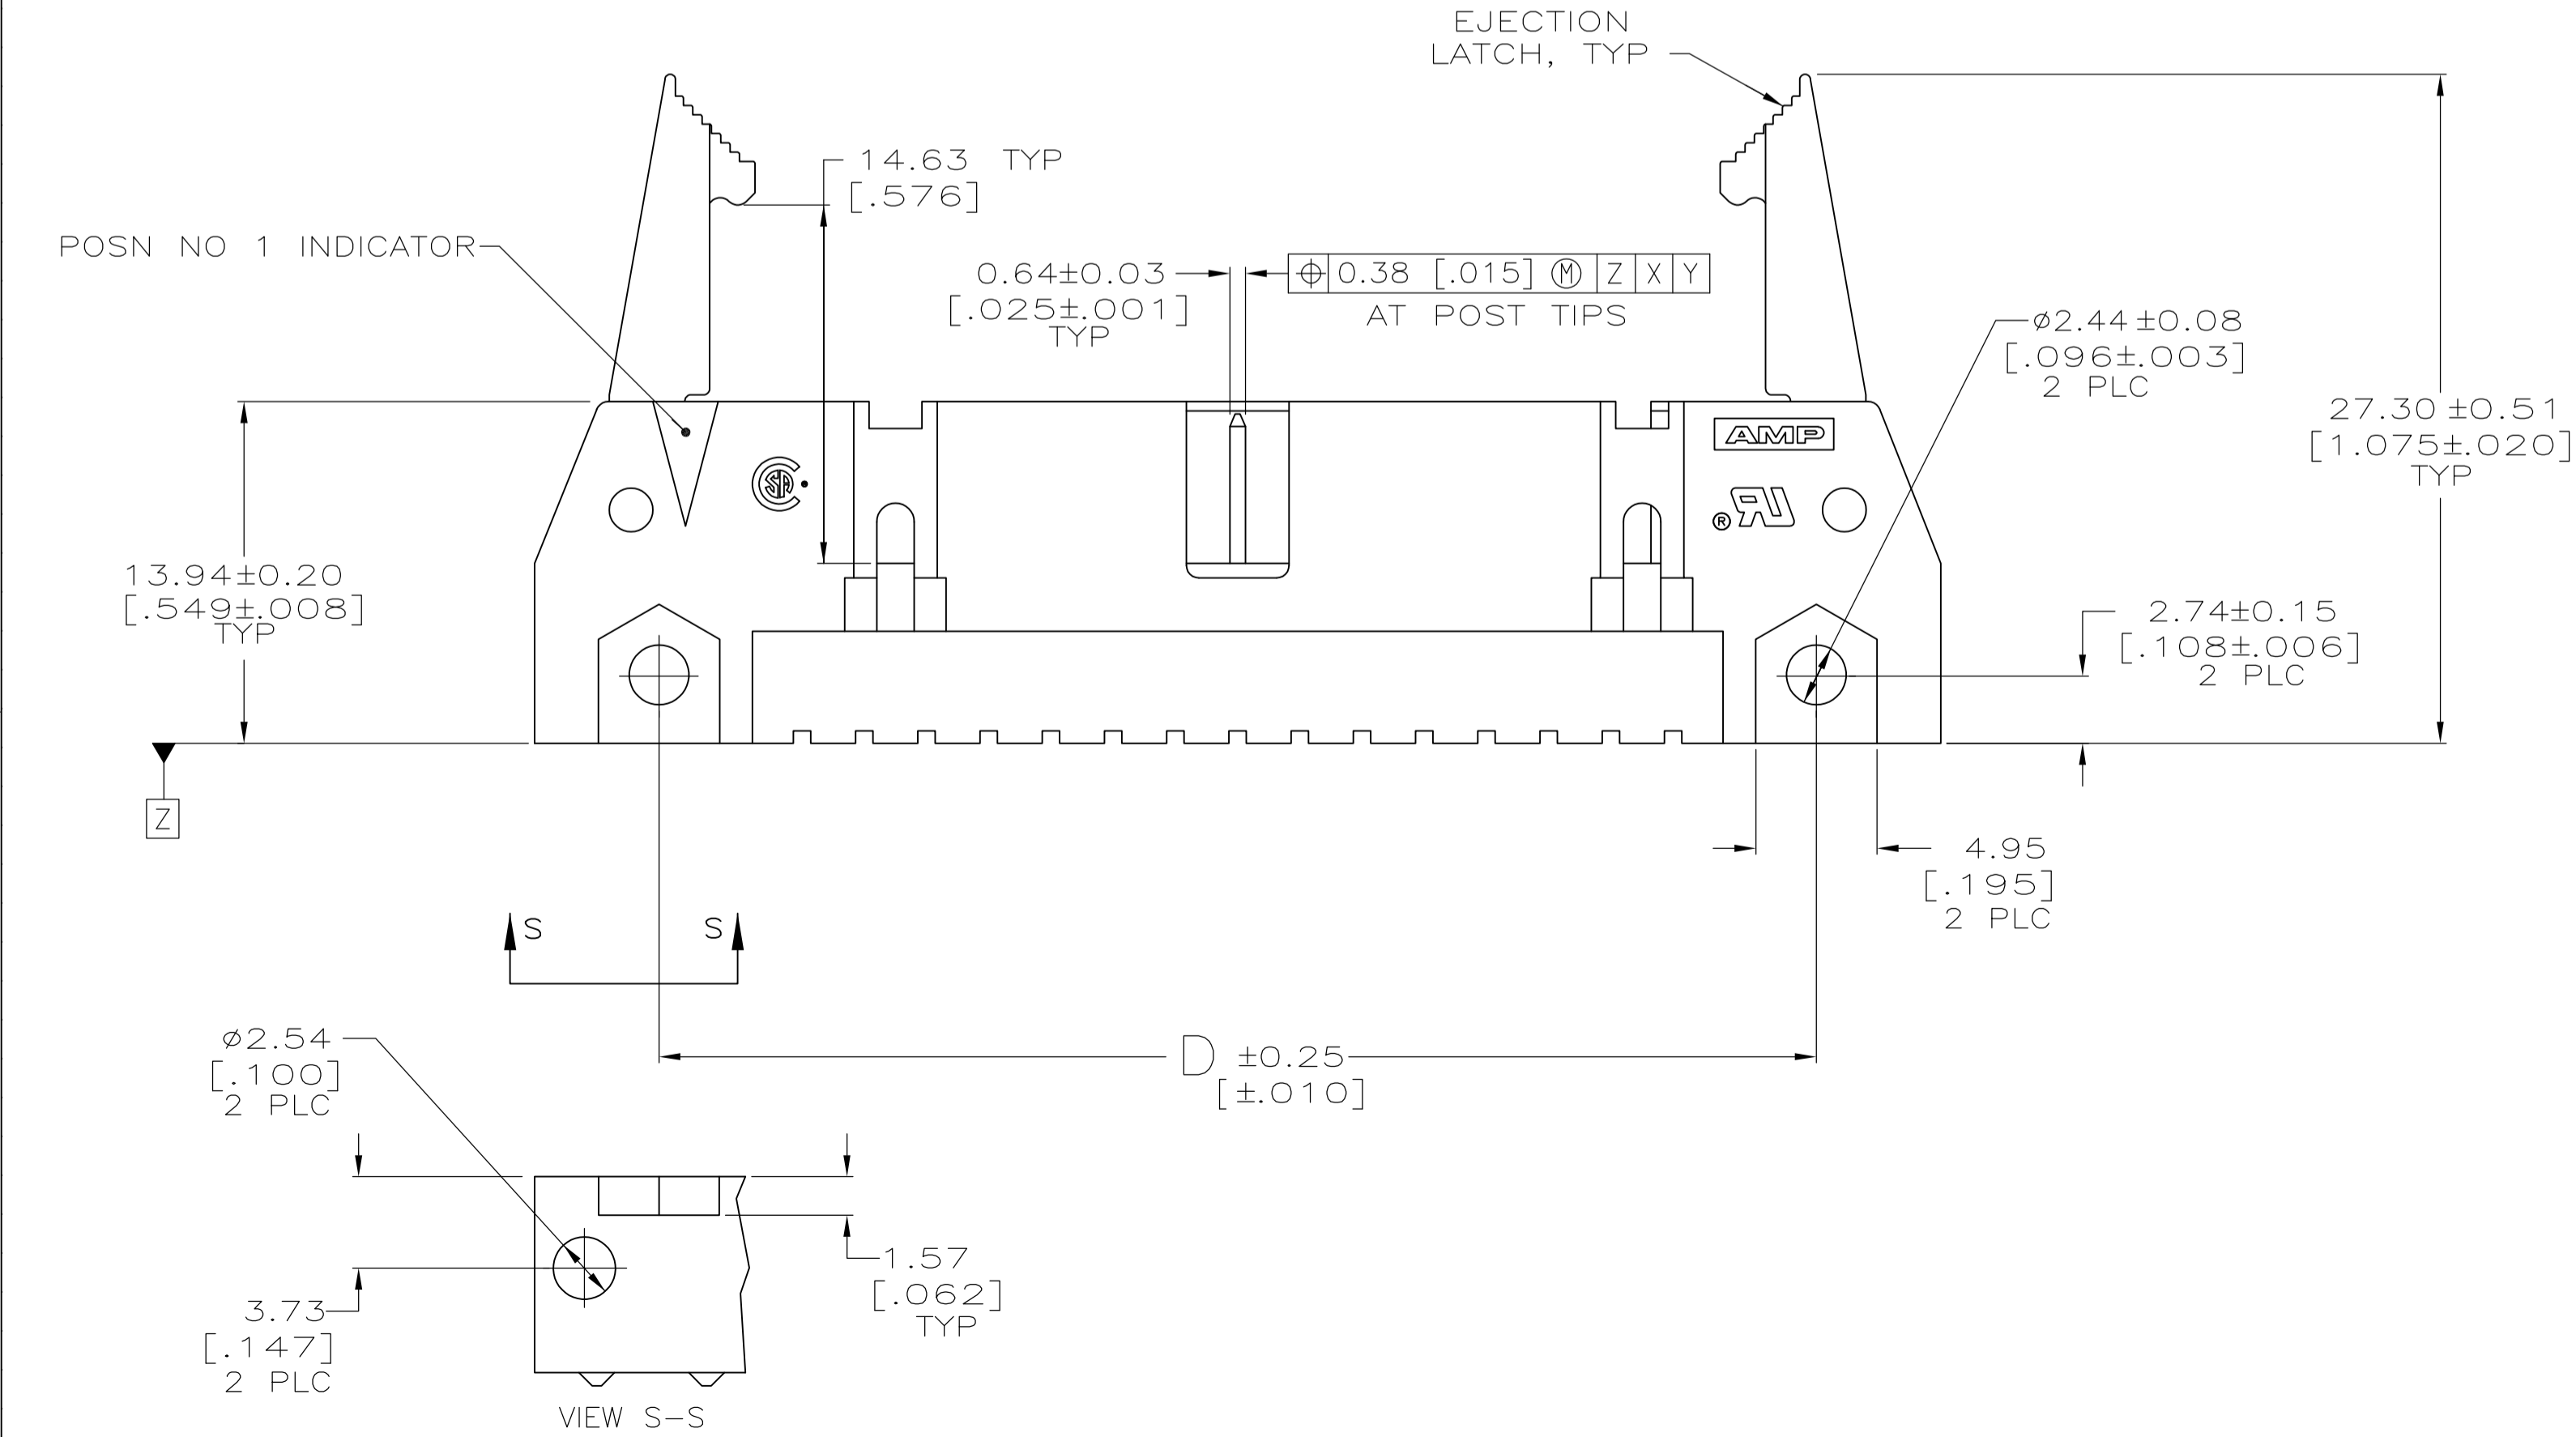
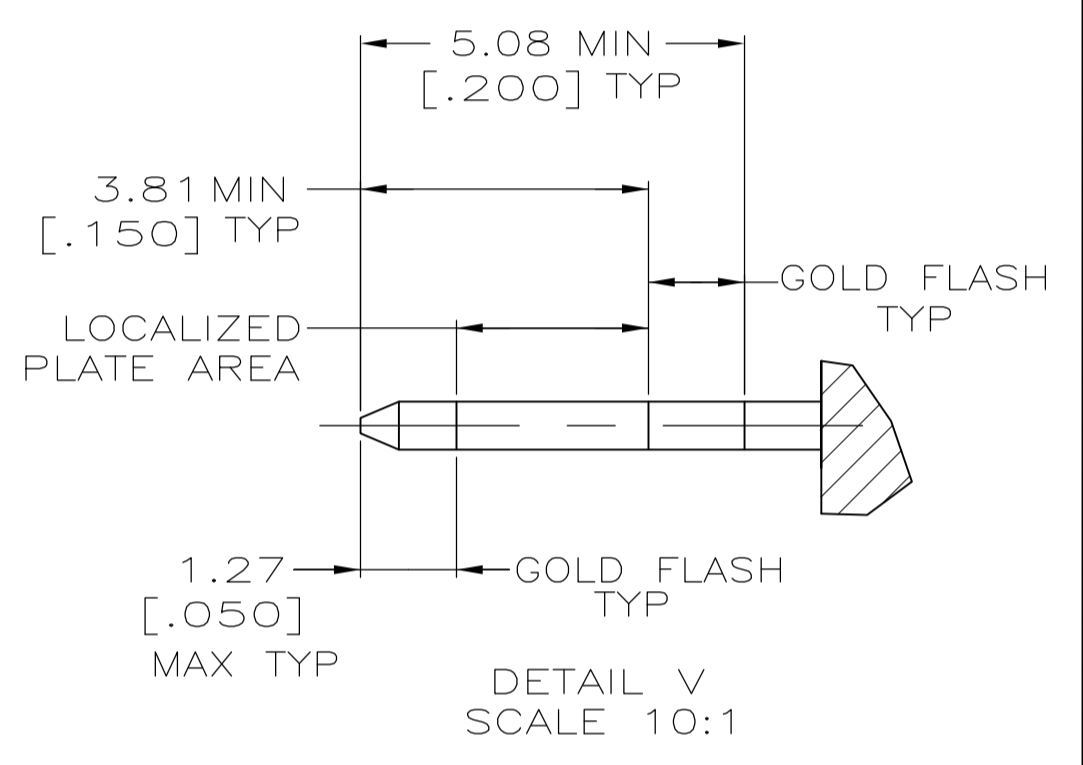


| LOC | | DIST | | REVISIONS | | | |
|-----|----|---------------------------|-----------|-----------|------|------|----|
| GP | 00 | REV | DATE | BY | APPV | DATE | BY |
| E | | REVISED PER ECO-12-020263 | 16NOV2012 | CJV | SLB | | |

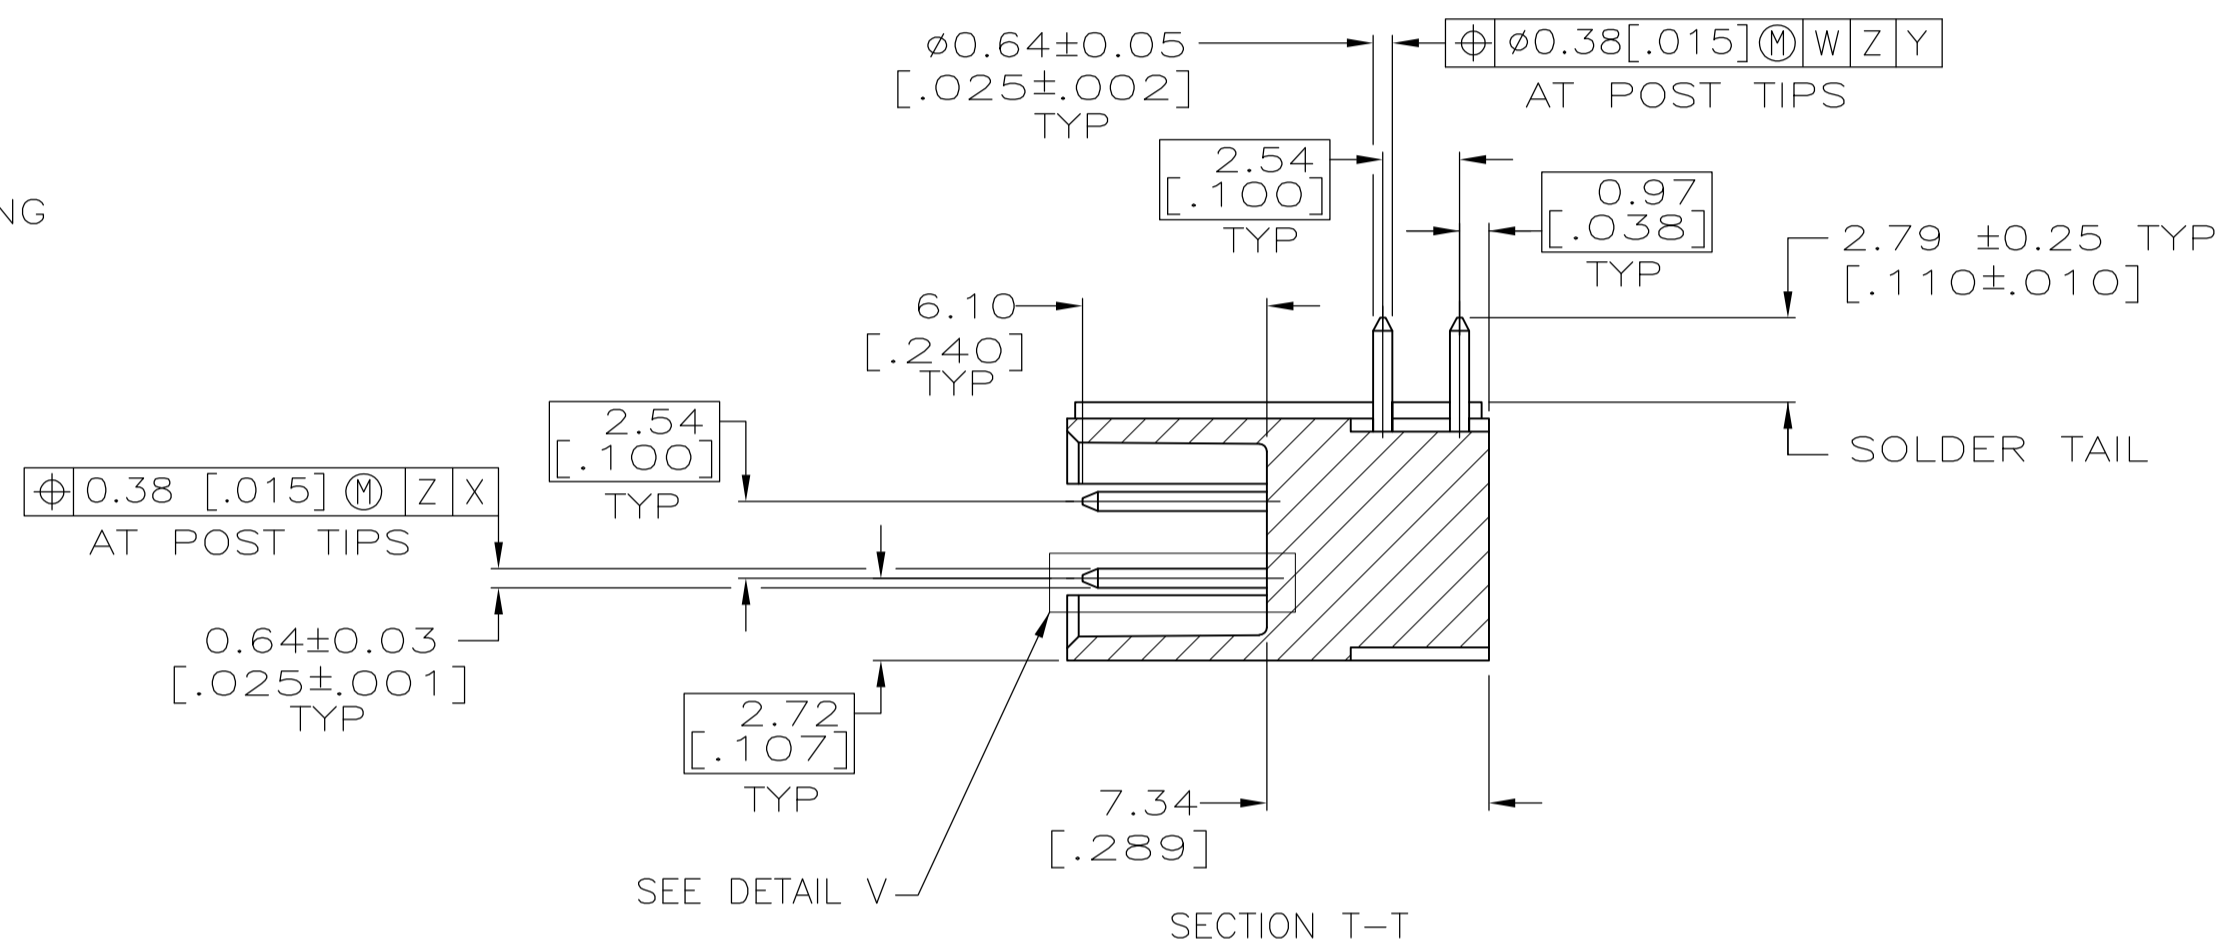

- 1. COORDINATE DIMENSION APPLIES FROM BASIC LOCATION.
- 2. 10 AND 14 POSITION SIZES CONTAIN ONLY ONE SLOT FOR SNAP-IN POLARIZER (MILITARY POLARIZATION) LOCATED AS SHOWN.
- 3. 10 POSITION SIZES CONTAIN ONLY ONE SLOT FOR DUAL POLARIZATION, LOCATED AS SHOWN.
- 4. RECOMMENDED PRINTED CIRCUIT BOARD THICKNESS IS 1.57 [0.062].
- 5. DISTANCE REQUIRED BY EJECTION LATCHES IN THE OPEN POSITION.
- 6. MATERIAL HOUSING & LATCHES: GLASS FILLED NYLON OR POLYESTER, UL94V-0 RATED BLACK. POSTS: BRASS.
- 7. POSTS:
GOLD FLASH OVER PALLADIUM-NICKEL PLATE, 0.38µm [0.000015] MIN TOTAL ON THE LOCALIZED PLATE AREA,
2.54µm [0.000100] MIN TIN PLATE ON THE SOLDER-TAILS,
1.27µm [0.000050] MIN NICKEL UNDERPLATE ON THE ENTIRE POST.
OR
0.38µm [0.000015] MIN GOLD PLATE ON THE LOCALIZED PLATE AREA,
2.54µm [0.000100] MIN TIN PLATE ON THE SOLDER-TAILS,
1.27µm [0.000050] MIN NICKEL UNDERPLATE ON THE ENTIRE POST.
- 8. DATUMS M & N TO BE ESTABLISHED BY CUSTOMER.

EJECTION LATCHES OMITTED IN THIS VIEW FOR CLARITY

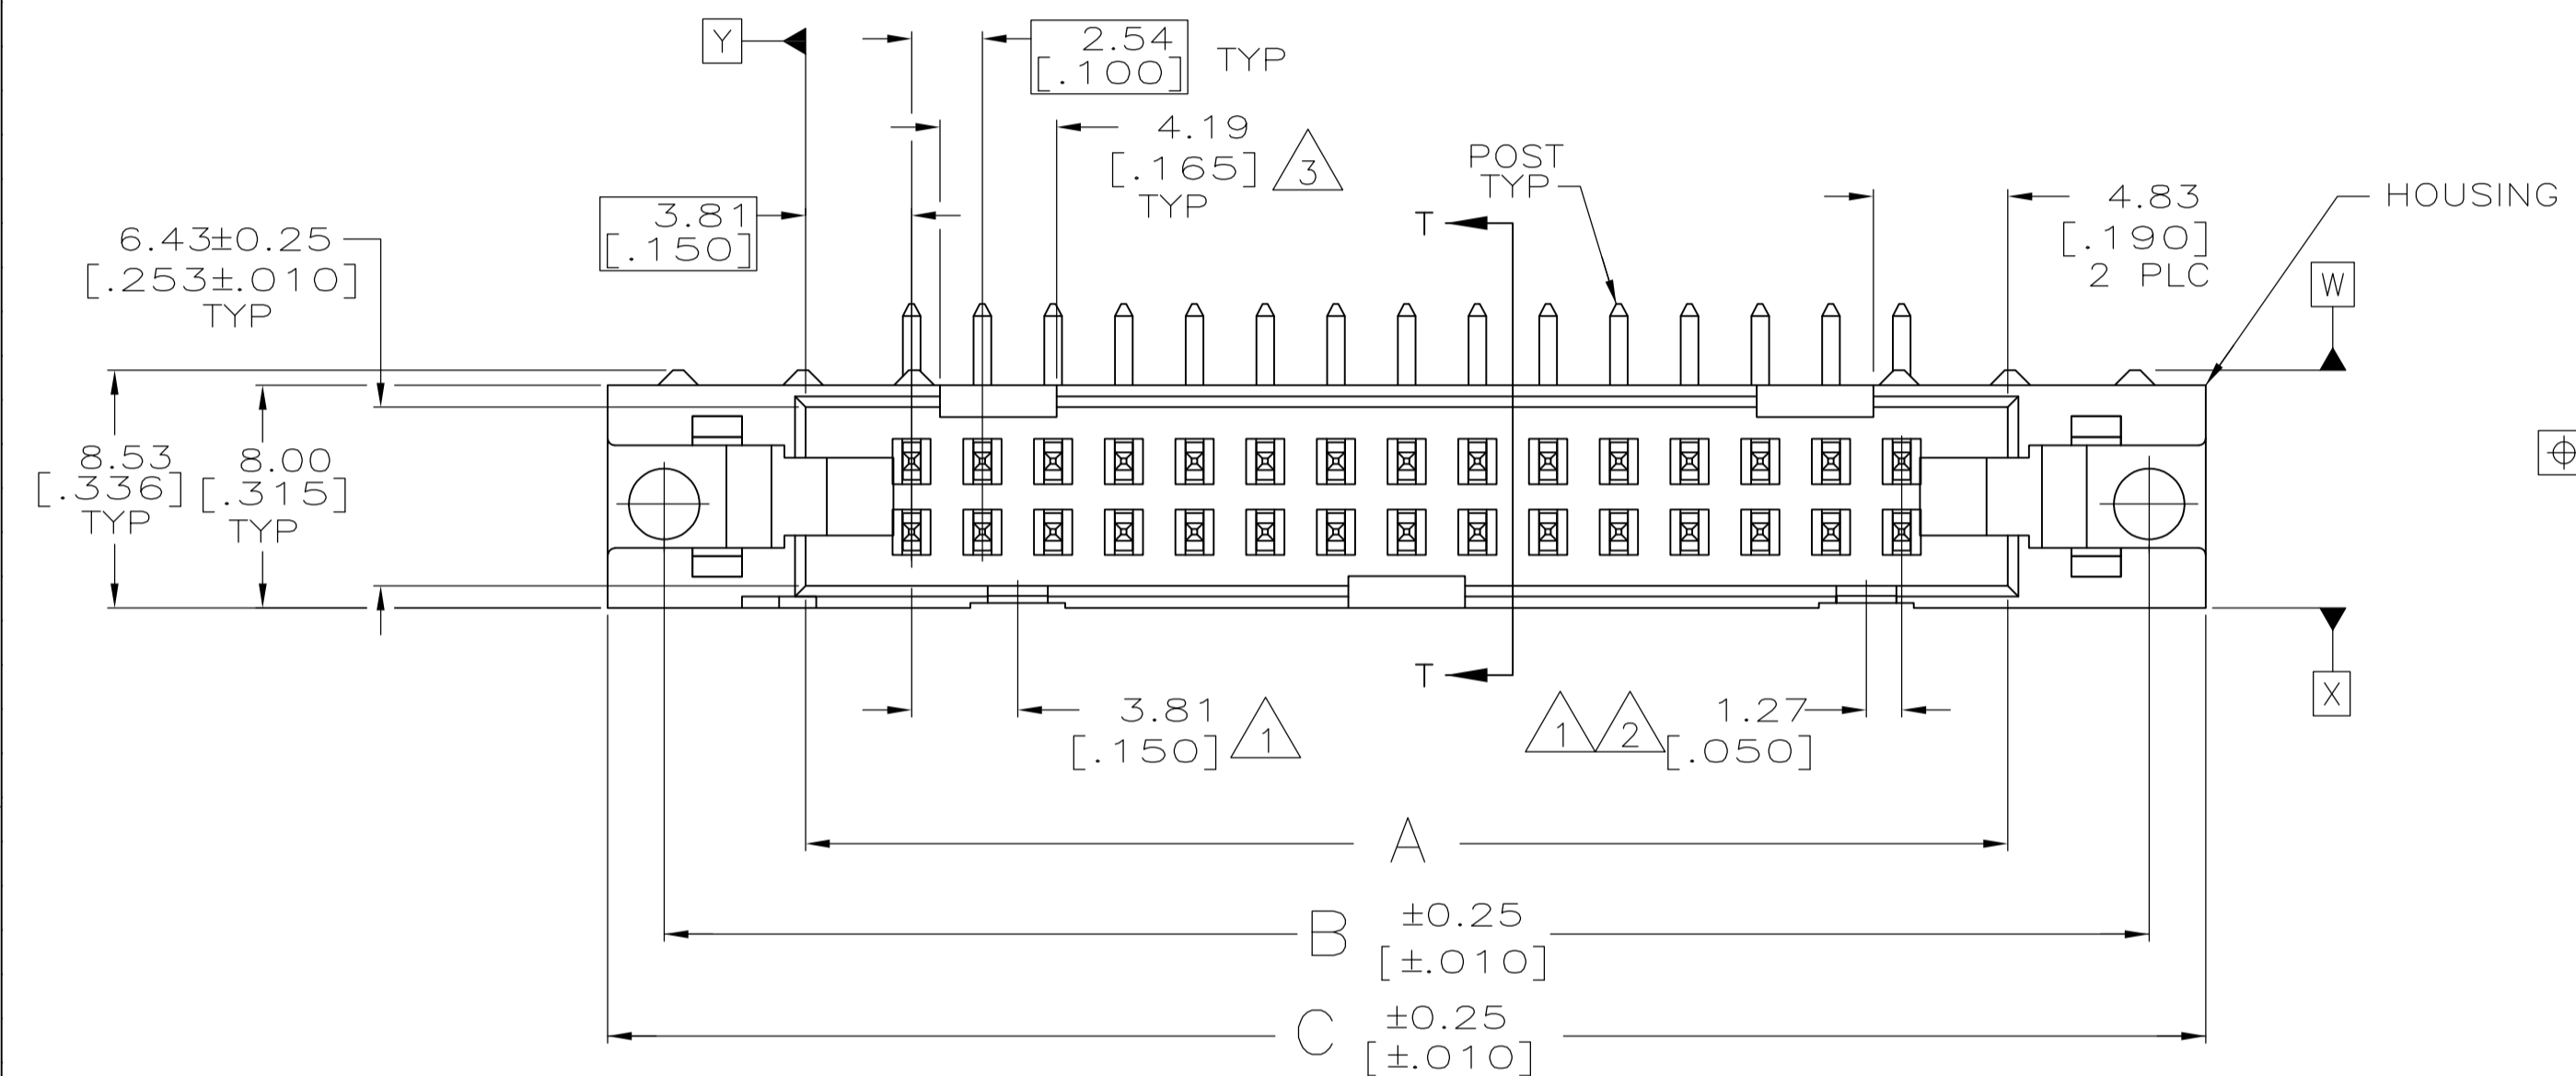

| | 78.74 | 90.42 | 90.42 | 100.58 | 96.52 | 86.36 | | |
|----------|---------|---------|---------|---------|---------|---------|------------|-------------|
| | [3.100] | [3.560] | [3.560] | [3.960] | [3.800] | [3.400] | 64 | 1-5499786-2 |
| | 73.66 | 85.34 | 85.34 | 95.50 | 91.44 | 81.28 | 60 | 1-5499786-1 |
| | [2.900] | [3.360] | [3.360] | [3.760] | [3.600] | [3.200] | | |
| | 60.96 | 72.64 | 72.64 | 82.80 | 78.74 | 68.58 | 50 | 1-5499786-0 |
| | [2.400] | [2.860] | [2.860] | [3.260] | [3.100] | [2.700] | | |
| | 48.26 | 59.94 | 59.94 | 70.10 | 66.04 | 55.88 | 40 | 5499786-9 |
| | [1.900] | [2.360] | [2.360] | [2.760] | [2.600] | [2.200] | | |
| | 40.64 | 52.32 | 52.32 | 62.48 | 58.42 | 48.26 | 34 | 5499786-8 |
| | [1.600] | [2.060] | [2.060] | [2.460] | [2.300] | [1.900] | | |
| OBSOLETE | 35.56 | 47.24 | 47.24 | 57.40 | 53.34 | 43.18 | 30 | 5499786-7 |
| | [1.400] | [1.860] | [1.860] | [2.260] | [2.100] | [1.700] | | |
| | 30.48 | 42.16 | 42.16 | 52.32 | 48.26 | 38.10 | 26 | 5499786-6 |
| | [1.200] | [1.660] | [1.660] | [2.060] | [1.900] | [1.500] | | |
| | 27.94 | 39.62 | 39.62 | 49.78 | 45.72 | 35.56 | 24 | 5499786-5 |
| | [1.100] | [1.560] | [1.560] | [1.960] | [1.800] | [1.400] | | |
| | 22.86 | 34.54 | 34.54 | 44.70 | 40.64 | 30.48 | 20 | 5499786-4 |
| | [.900] | [1.360] | [1.360] | [1.760] | [1.600] | [1.200] | | |
| | 17.78 | 29.46 | 29.46 | 39.62 | 35.56 | 25.40 | 16 | 5499786-3 |
| | [.700] | [1.160] | [1.160] | [1.560] | [1.400] | [1.000] | | |
| | 15.24 | 26.92 | 26.92 | 37.08 | 33.02 | 22.86 | 14 | 5499786-2 |
| | [.600] | [1.060] | [1.060] | [1.460] | [1.300] | [.900] | | |
| | 10.16 | 21.84 | 21.84 | 32.00 | 27.94 | 17.78 | 10 | 5499786-1 |
| | [.400] | [.860] | [.860] | [1.260] | [1.100] | [.700] | | |
| | F | E | D | C | B | A | NO OF POSN | PART NUMBER |

THIS DRAWING IS A CONTROLLED DOCUMENT.

| | | | | |
|-------------------------|--|-----------------------|---------------------|-------------------|
| DIMENSIONS: mm (INCHES) | TOLERANCES UNLESS OTHERWISE SPECIFIED: | APPROVED: M. WALMSLEY | DATE: 01-07-05 | NAME: M. WALMSLEY |
| 0 PLC ± - | 1 PLC ± - | 2 PLC ± - | 3 PLC ± 0.13[0.005] | 4 PLC ± - |
| MATERIAL: 6 | | FINISH: 6 | | WEIGHT: - |
| CUSTOMER DRAWING | | SCALE: 4:1 | SHEET: 1 of 1 | REV: E |

STE TE Connectivity

HEADER ASSY, UNIVERSAL, AMP-LATCH

108-40018

00779 5499786

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)