
CUSTOMER DRAWING

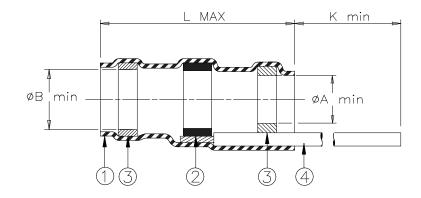

	'XY' = WIRE GAUGE (AWG)								
Product Name	Product Dimensions					Cable Dimensions			
	L	øΑ	øΒ	K	AWG	øD	øΕ	J±0.5	Color of
	max	min	min	min		max	min	(J±0.02)	Item 4
D-101-33					22				black
D-101-34	17.0	4.30	5.00	150	22	4.30	1.78	7.00	white
D-101-35	(0.670)	(0.170)	(0.200)	(5.900)	20	(0.170)	(0.070)	(0.275)	black
D-101-36					20				white

MATERIALS

- 1. INSULATION SLEEVE: Heat-shrinkable, transparent blue, radiation cross-linked polyvinylidene fluoride.
- 2. SOLDER PREFORM WITH FLUX:

SOLDER: TYPE Sn63 per ANSI-J-STD-006. FLUX: TYPE ROL1 per ANSI-J-STD-004.


THERMAL INDICATOR: red.

- 3. MELTABLE RINGS: Thermally stabilized thermoplastic. Color: gray.
- GROUND LEAD: Raychem 55A0111-XY in accordance with MIL-W-22759/32 AWG 'XY' (see table) stranded tin plated copper. Color: see table.

APPLICATION

- 1. These parts are designed to provide an environment protected shield termination on cables, rated for 125°C minimum, meeting the dimensional criteria listed, having tin or silver plated copper shields.
- 2. Temperature range: -55°C to +150°C.
 Install using TE Connectivity approved convection or infrared heating tools in accordance with Raychem process standard RCPS-100-70.

For best results, prepare the cable as shown:



THERN			Raychem THERMOFIT DEVICES	SOLDERSLEEVE* DEVICE WITH PRE-INSTALLED LEAD					
Unless otherwise specified dimensions are in millimeters. [Inches dimensions are shown in brackets]			D-101-3X						
TOLERANCES:	ANGL	ANGLES: N/A TE Connectivity reserves the right		onnectivity reserves the right to					
0.00 N/A 0.0 N/A 0 N/A	ROUG MICRO	HNESS IN ON	amend this drawing at any time. Users should evaluate the suitability of the product for their application.		REV:	DATE:	DATE: 30-Mar-2020		
DRAWN BY: DATE: M. FORONDA 15-Jun-19		ECO: ECO-20-004511		SCALE: NTS	SIZE: A	SHEET: 1 of 1			

© 2020 TE Connectivity Ltd. Family of Companies. All Rights Reserved. If this document is printed it becomes uncontrolled. Check for the latest revision.

*TE Connectivity, TE connectivity (logo), Raychem, THERMOFIT, SolderSleeve are trademarks

单击下面可查看定价,库存,交付和生命周期等信息

>>TE Connectivity(泰科)