


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION, 19 .
 © COPYRIGHT 19 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

PROD CODE	LOC	DIST	P	F	ZONE	LTR	DESCRIPTION	DATE	APPD
4092	DF	SO				0	RELEASED PER 0600-5496-96	CT	SG

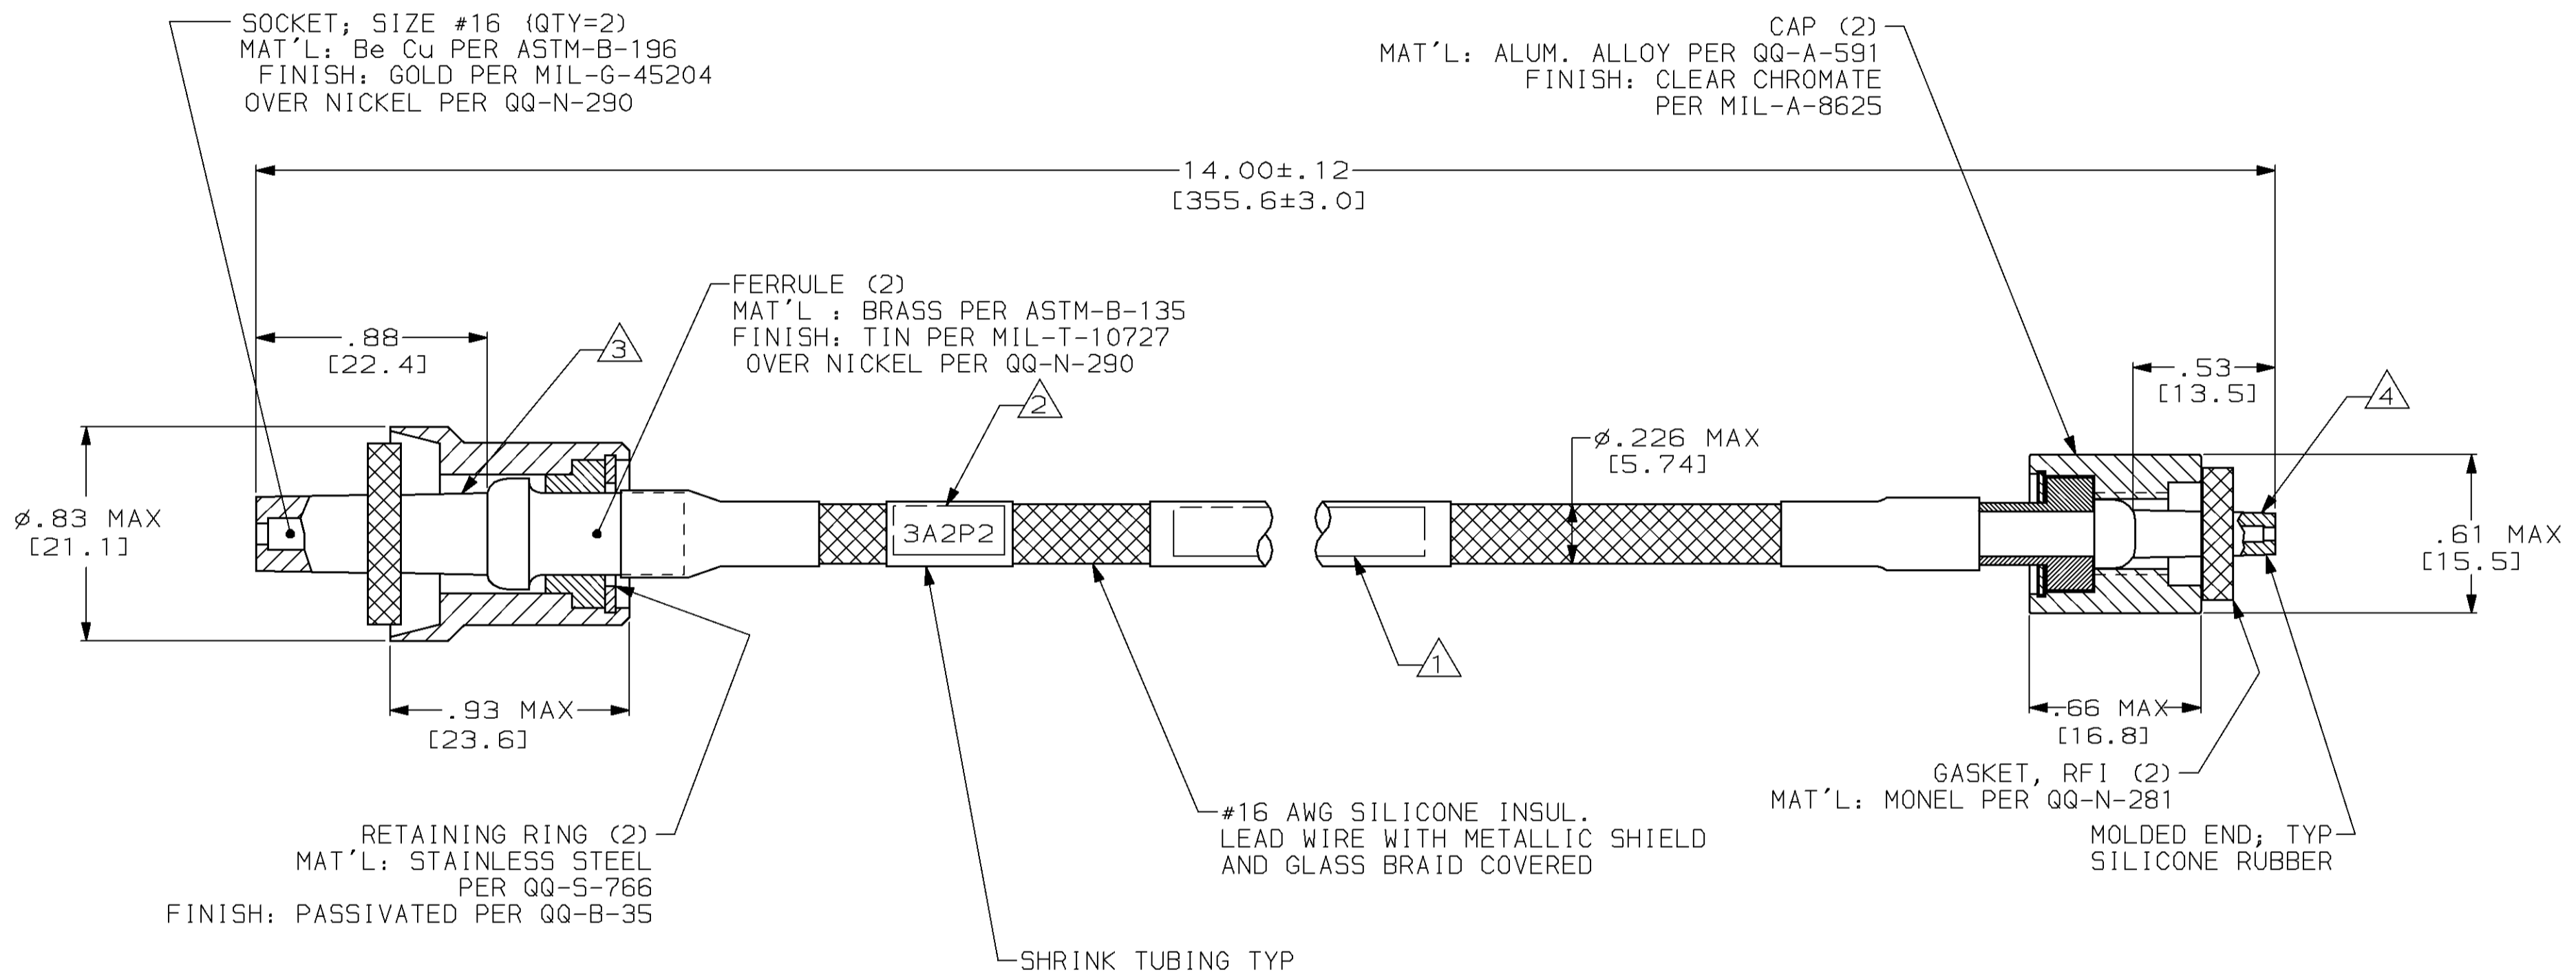

- 1 AMP INFO MARKED PER MIL-STD-130.
- 2 CUSTOMER NUMBER: 3A2P2 MARKED PER MIL-STD-130. ORIENTED AS SHOWN.
- 3 TO MATE WITH AMP LGH-1 RECEPTACLE WITH .88 [22.4] BARREL DEPTH.
- 4 TO MATE WITH AMP LGH-1/2 RECEPTACLE WITH .53 [13.5] BARREL DEPTH.
- 5. OPERATING VOLTAGE: 10 KVDC AT 0 TO 70,000 FEET, -55°C TO +125°C.

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN INCHES [mm] TOLERANCES ON: 2 PLC DEC ± .02 [0.5] 3 PLC DEC ± .015 [0.38] ANGLES ± -	DR 5-9-96 C.C. THOMAS	AMP Incorporated Harrisburg, PA 17105-3608	
	CHK 5-15-96 S. GLATFELTER		
MATERIAL SEE CALLOUTS	APPD 5-15-96 S. GLATFELTER	NAME LEAD ASSEMBLY, DBL. END, RFI SHIELD, LGH-1 & LGH-1/2	
	APPD 5-15-96 C.C. THOMAS	SIZE C 00779	
FINISH SEE CALLOUTS	PRODUCT SPEC -	DRAWING NO 443831	
	APPLICATION SPEC -	SCALE 2:1	SHEET 1 OF 1
WEIGHT -			

443831-1
 PART NO.

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)