

## Introducing 3.5mm Spring Type Flush Mount Plug with Mating Unshrouded Header

The new 3.5mm Spring Type Flush Mount Plug with Mating Unshrouded Header now allows for a quick and easy way to insert the wire in signal applications without the use of special tools. The Spring Type Flush Mount Plug is customizable, reduces labor cost of installation and provides superior wire retention with proven quality in automation and drives technology or signal controls.

While the plug is available in 2 through 8 positions, the header is available with a standard narrow base or with a wider base for stability.

### KEY FEATURES

- Compact design
- Male insertion from double directions
- Fast wire connections
- Male in high temperature
- Also available with wider base for stability

### APPLICATIONS

- Automation and Drives technology
- Signal controls
- Control boxes for HVAC and Thermostats
- Controls for sound recordings/  
TV or Radio production

### MECHANICAL

- Insertion Force per pole 2.5N
- Withdrawal force per pole 4.5N min
- Stripping Length 8.5-10mm
- Operating temperature range -40°C to +110°C

### ELECTRICAL

- Wire range 20-16 solid and stranded
- 150V, 2A per UL
- UL File E60677

### MATERIALS

- Clamping Spring: lead-free tin plated steel
- Housing: 94VO rated Polyamide
- Pin Terminals: tin plated copper alloy

### STANDARDS AND SPECIFICATIONS

UL 1059

### PRODUCT DIMENSIONS

#### Plug:

Height 12.5 mm, Width 17 mm, Length dependent on number of positions

#### Standard Unshrouded Header:

Height 12.5 mm, Width 2.8 mm, Length dependent on number of positions


#### Wide Base Unshrouded Header:

Height 16.5 mm, Width 8 mm, Length dependent on position size


[te.com/industrial](http://te.com/industrial)






**FLUSH MOUNT PLUG**

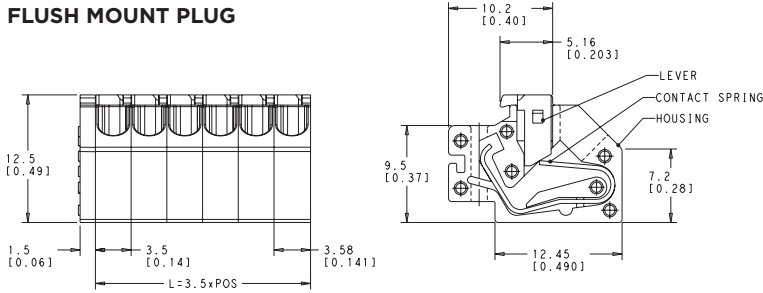


Part Number	Description
1986716-2	Flush Mt Plug, Spring Type, 3.5MM, 2 posn
1986716-3	Flush Mt Plug, Spring Type, 3.5MM, 3 posn
1986716-4	Flush Mt Plug, Spring Type, 3.5MM, 4 posn
1986716-5	Flush Mt Plug, Spring Type, 3.5MM, 5 posn
1986716-6	Flush Mt Plug, Spring Type, 3.5MM, 6 posn
1986716-7	Flush Mt Plug, Spring Type, 3.5MM, 7 posn
1986716-8	Flush Mt Plug, Spring Type, 3.5MM, 8 posn

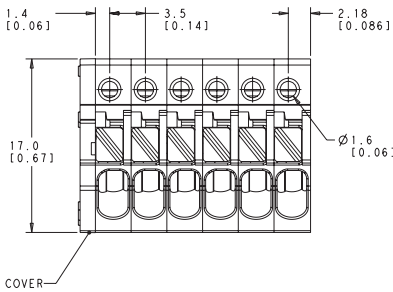



**UNSHROUDED HEADER 12.5 HEIGHT**



Part Number	Description
1986717-2	Unshrouded Header, 3.5MM, 2 posn
1986717-3	Unshrouded Header, 3.5MM, 3 posn
1986717-4	Unshrouded Header, 3.5MM, 4 posn
1986717-5	Unshrouded Header, 3.5MM, 5 posn
1986717-6	Unshrouded Header, 3.5MM, 6 posn
1986717-7	Unshrouded Header, 3.5MM, 7 posn
1986717-8	Unshrouded Header, 3.5MM, 8 posn



**UNSHROUDED HEADER 16.5 HEIGHT**



Part Number	Description
1986718-2	Unshrouded Header, 3.5MM, Wide Flange, 2 posn
1986718-3	Unshrouded Header, 3.5MM, Wide Flange, 3 posn
1986718-4	Unshrouded Header, 3.5MM, Wide Flange, 4 posn
1986718-5	Unshrouded Header, 3.5MM, Wide Flange, 5 posn
1986718-6	Unshrouded Header, 3.5MM, Wide Flange, 6 posn
1986718-7	Unshrouded Header, 3.5MM, Wide Flange, 7 posn
1986718-8	Unshrouded Header, 3.5MM, Wide Flange, 8 posn

While TE has made every reasonable effort to ensure the accuracy of the information in this brochure, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this catalog are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult TE for the latest dimensions and design specifications.

te.com/industrial



单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)