


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	D5	REVISED PER ECR-20-009600	06JUL20	LZ	EW

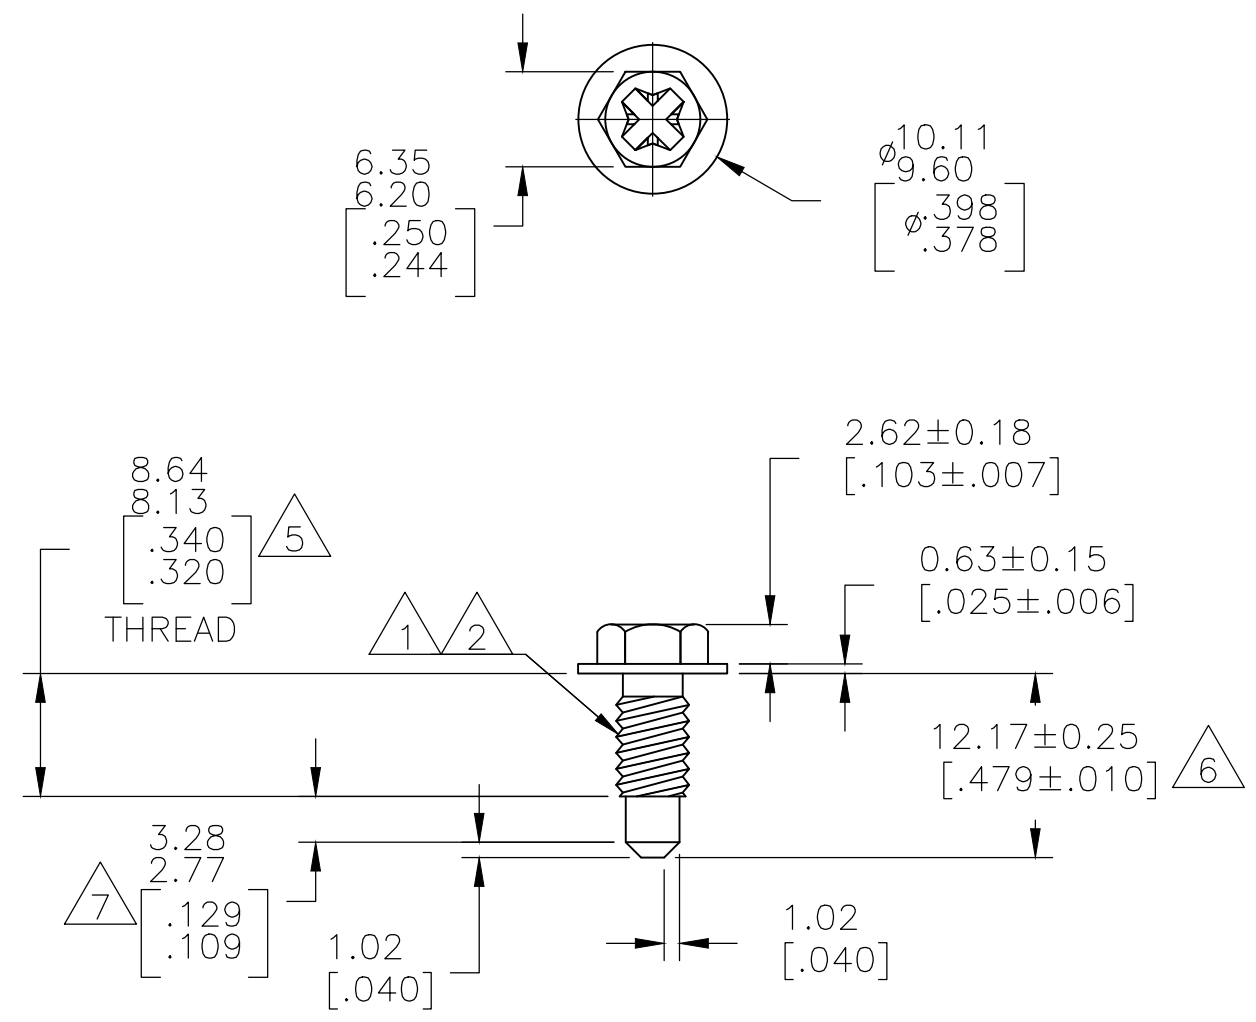

10-24 UNC STEEL PHILLIPS HEX WASHER HEAD MACHINE SCREW

- 1 THREAD GAUGING: USE 2A FOR NO-GO. USE 3A FOR GO.
- 2 THREAD GAUGING: USE 1A NO-GO. USE 2A GO.
- 3 HEAT TREAT PER SAE J429 TO MEET ROCWELL SCALE C 25-40.
- 4 SCREW MUST WITHSTAND 50 INCH POUNDS OF TORQUE WITHOUT DESTRUCTIVE DAMAGE.
- 5 THREAD LENGTH TO BE MEASURED TO THE END OF THE LAST THREAD.
- 6 THIS LENGTH APPLIES TO 521647-1 AND -2 ONLY.
- 7 THIS DIMENSION APPLIES TO 521647-3 ONLY
- 8 PRELIMINARY PART NUMBER.
- 9 RE-PACKAGE SCREW #521647-3 1000 PER BOX PER PALI

1	9	521647-4
1		521647-3
2	8	521647-2
1		521647-1
THREAD GAUGE		PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R FLAIG	27JUN2003	STE TE Connectivity			
		CHK D DECKER	27JUN2003				
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME			
		0 PLC	± -	PRODUCT SPEC			
		1 PLC	± -	-			
		2 PLC	± 0.13 [.005]	APPLICATION SPEC			
		3 PLC	± -	-			
MATERIAL		FINISH		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
STEEL		NICKEL PLATED		WEIGHT	A300779	C-521647	-
CUSTOMER DRAWING				SCALE	2:1	SHEET	1 OF 1
				REV	D5		

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)