
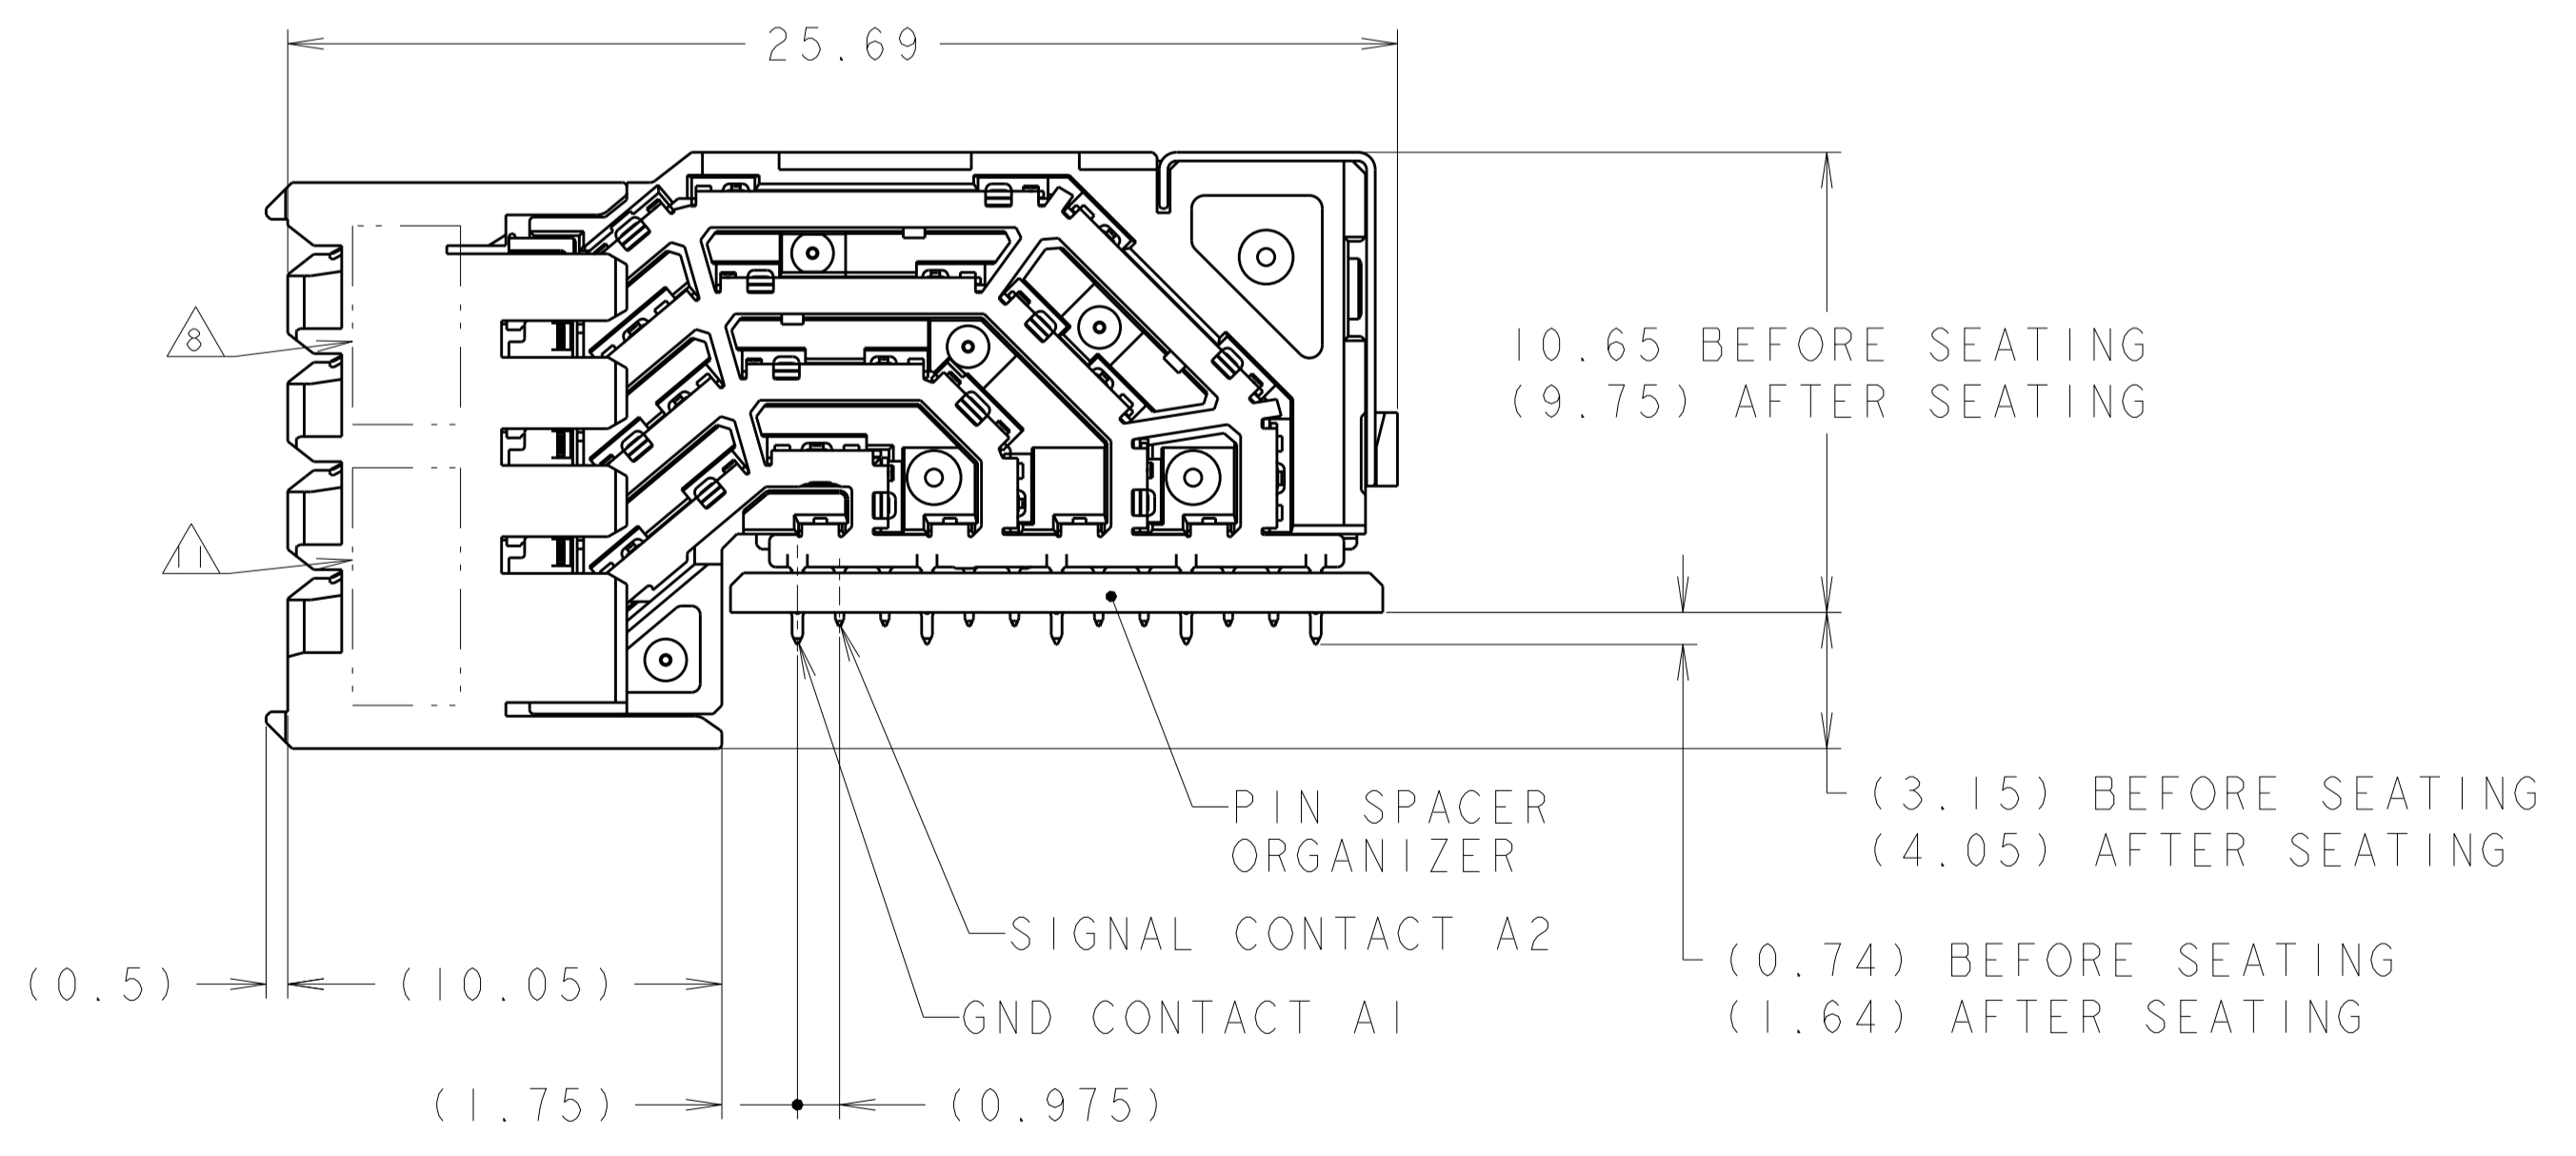
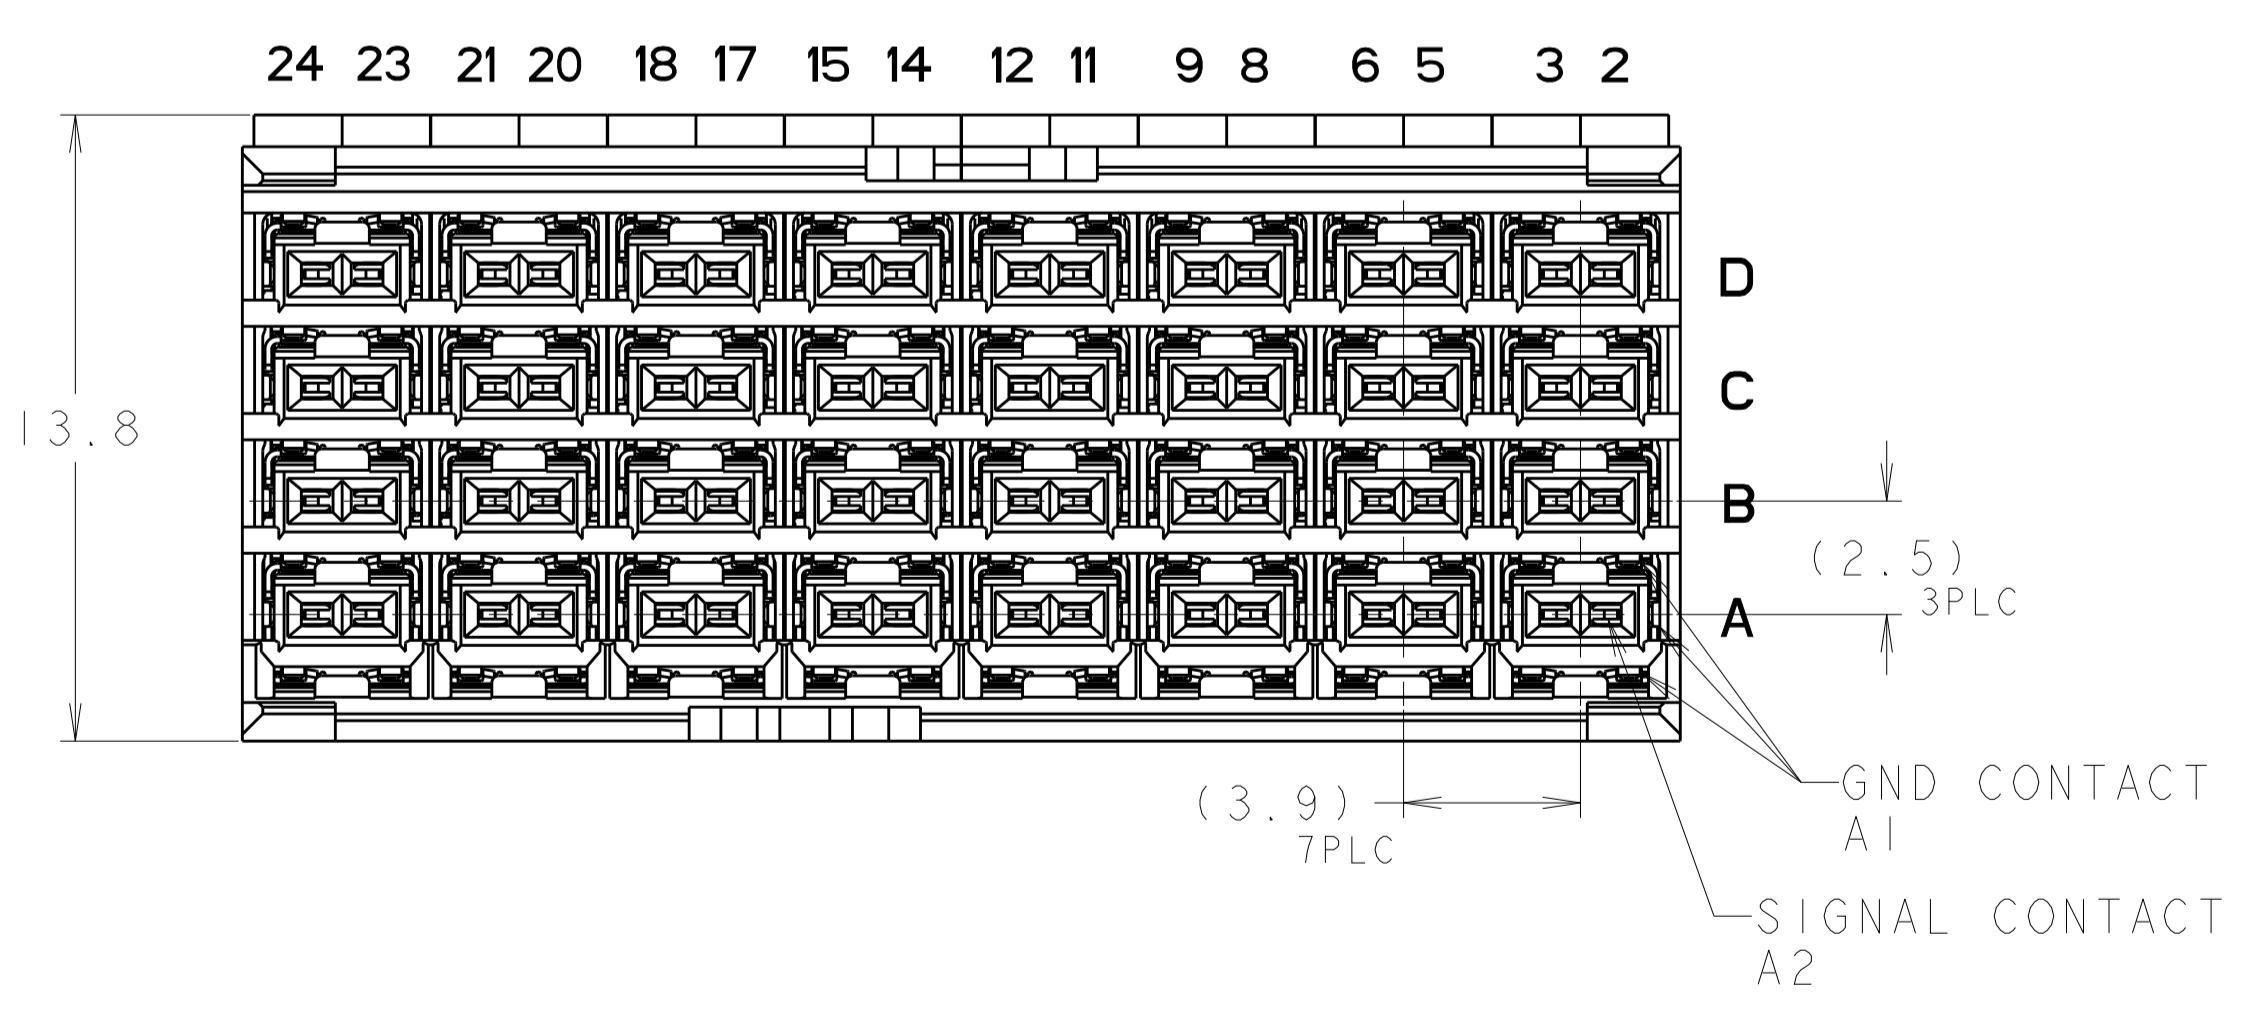


REVISIONS				
P.	LTN	DESCRIPTION	DATE	OWN APVD
A		RELEASED	16DEC2018	Y. K T. M
A1		REVISED	24DEC2019	Y. K T. M

- 1 CONTACTS AND SHIELDS - COPPER ALLOY
 ORGANIZER - STAINLESS STEEL
 HOUSING AND PIN SPACER - THERMOPLASTIC, UL 94V-0, BLACK
- 2 FINISH:
 CONFORMS TO THE REQUIREMENTS OF TE PRODUCT SPECIFICATION 108-140186
 BASED ON TELCORDIA GR-1217-CORE FOR SYSTEM QUALITY LEVEL III,
 APPLICATIONS IN CONTROLLED ENVIRONMENTS (CENTRAL OFFICE).
 COMPLIANT PIN AREA : 0.5um MIN MATTE TIN.
- 3 GROUND PLATED THRU HOLE REQUIREMENTS:
 FINISHED HOLE = $\varnothing 0.37 \pm 0.05$
 HOLE SIZE PRIOR TO PLATING = $\varnothing 0.450 \pm 0.025$
 COPPER THICKNESS = 0.025 MIN
 IMMERSION TIN IF APPLICABLE = (0.00095)
- 4 SIGNAL PLATED THRU HOLE REQUIREMENTS:
 FINISHED HOLE = $\varnothing 0.29 \pm 0.05$
 HOLE SIZE PRIOR TO PLATING = $\varnothing 0.37 \pm 0.025$ (#79 DRILL)
 COPPER THICKNESS = 0.025 MIN
 IMMERSION TIN IF APPLICABLE = (0.00095)
- 5 SI VIA PLATED THRU HOLE REQUIREMENTS:
 FINISHED HOLE = AS REQUIRED
 HOLE SIZE PRIOR TO PLATING = $\varnothing 0.254 \pm 0.025$
 COPPER THICKNESS = 0.025 MIN
 IMMERSION TIN IF APPLICABLE = (0.00095)
- 6 SIGNAL HOLES AND SI VIAS:
 PTH DIMENSIONS APPLY TO THE TOP 1.00mm OF THE PCB THICKNESS FROM THE CONNECTOR MOUNTING SIDE.
 GROUND HOLES:
 PTH DIMENSIONS APPLY TO THE TOP 1.25mm OF THE PCB THICKNESS FROM THE CONNECTOR MOUNTING SIDE.
- 7 CONNECTOR MARKED WITH PART NUMBER, DATE CODE, AND "92 OHM" IN APPROXIMATE AREA SHOWN.
- 8 DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER
- 9 APPLIES TO FINISHED HOLE DIAMETER
- 10 DATAMATRIX BARCODE MARKING IN THIS AREA.




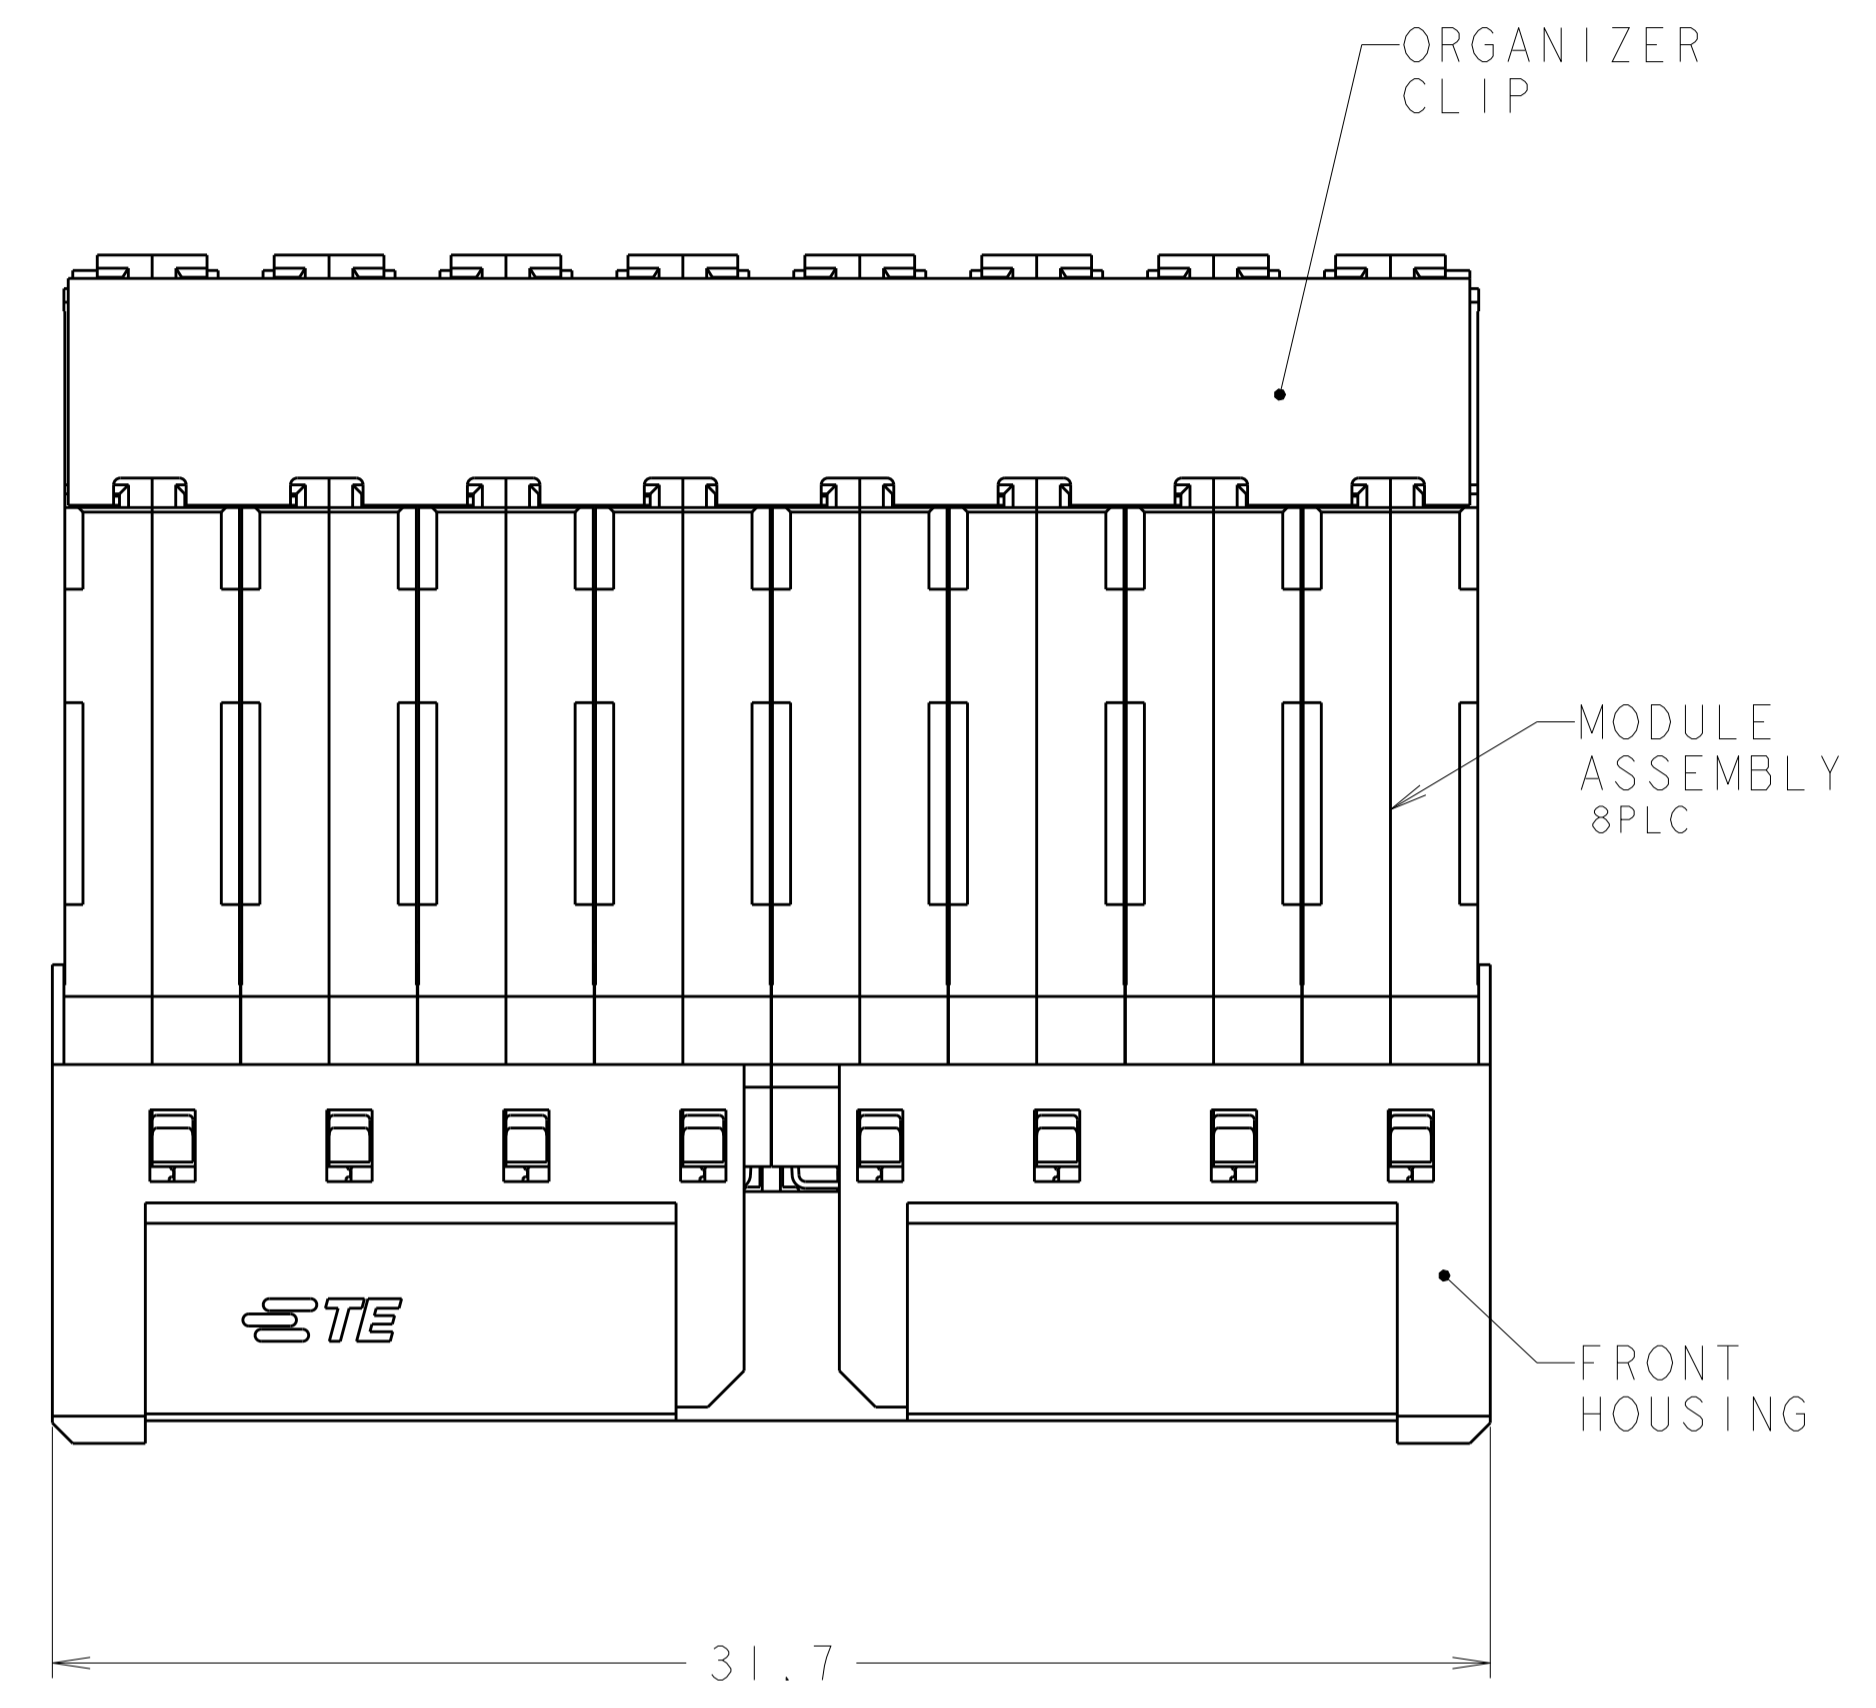


2329739-1
 PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN Y. KODAIRA 10JAN2018	TE Connectivity NAME RIGHT ANGLE RECEPTACLE ASSEMBLY 4 PAIR 8 COLUMN, 92 OHM, PAIR-IN-ROW, STRADA WHISPER R
DIMENSIONS: mm		CHK M. IWASAKI 10JAN2018	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD T. MATSUDAIRA 10JAN2018	PRODUCT SPEC
0 PLC ± 0.3 1 PLC ± 0.3 2 PLC ± 0.3 3 PLC ± 0.3 4 PLC ± 0.3 ANGLES ± 0.3		SIZE 114-32029	APPLICATION SPEC
MATERIAL		WEIGHT	RESTRICTED TO
FINISH		CAGE CODE	DRAWING NO
1 2		0079	2329739
CUSTOMER DRAWING		SCALE	SHEET
		6:1	1 OF 2
			REV A1

REVISIONS				
P. LTR.	DESCRIPTION	DATE	OWN	APVD
	SEE SHEET 1			

- = SIGNAL
- ⊗ = GROUND
- ⊙ = SIGNAL INTEGRITY VIA TO GROUND

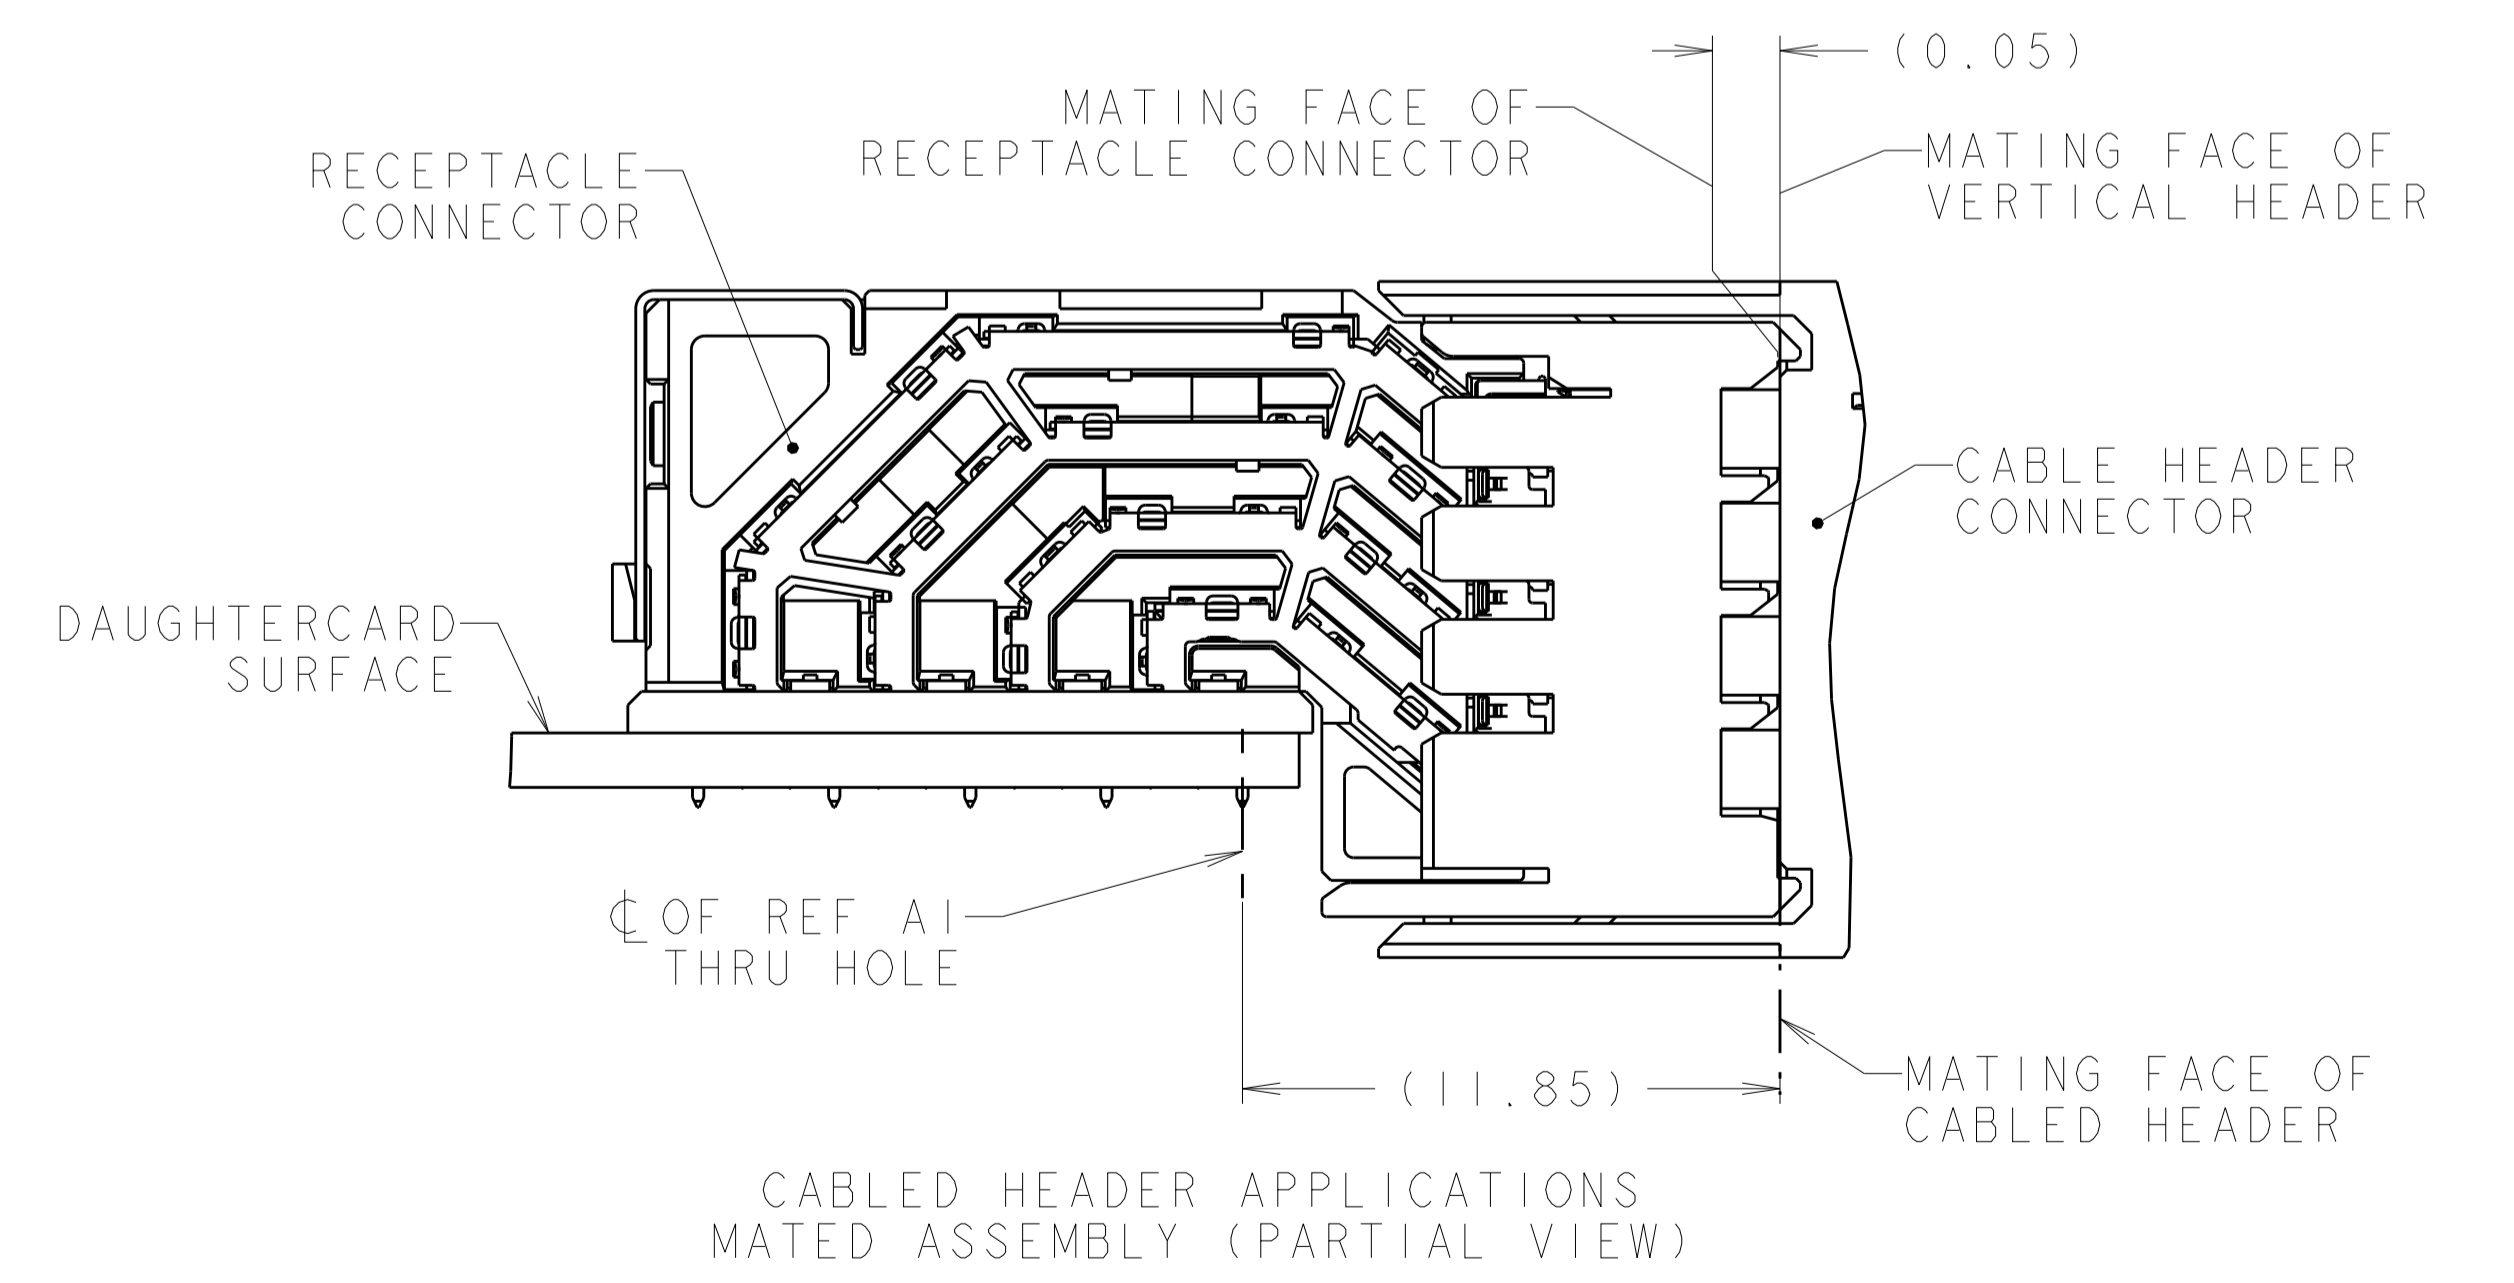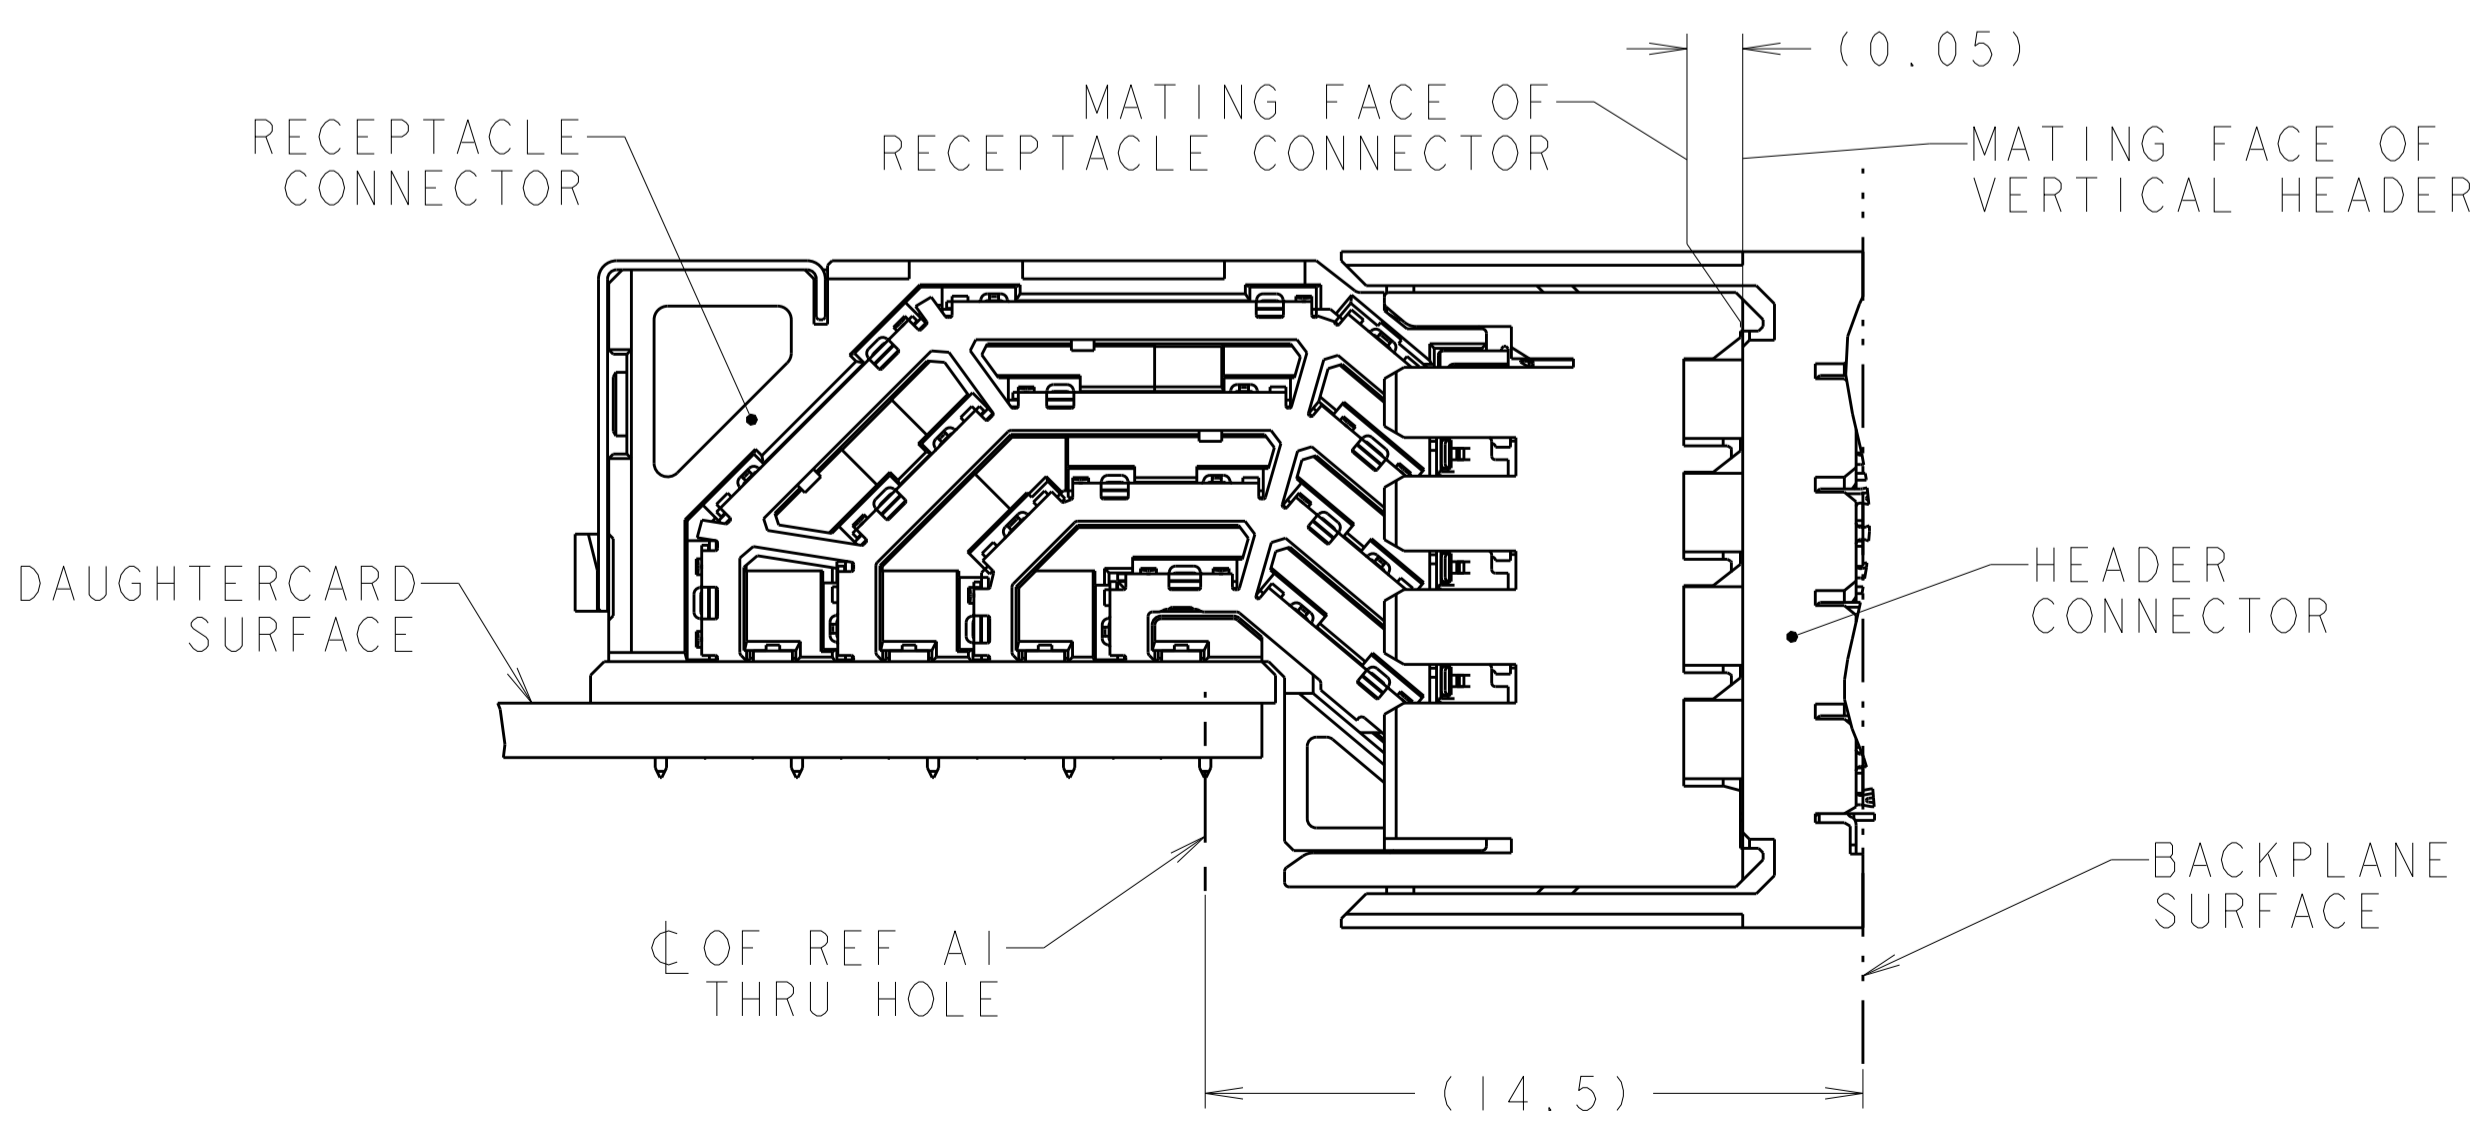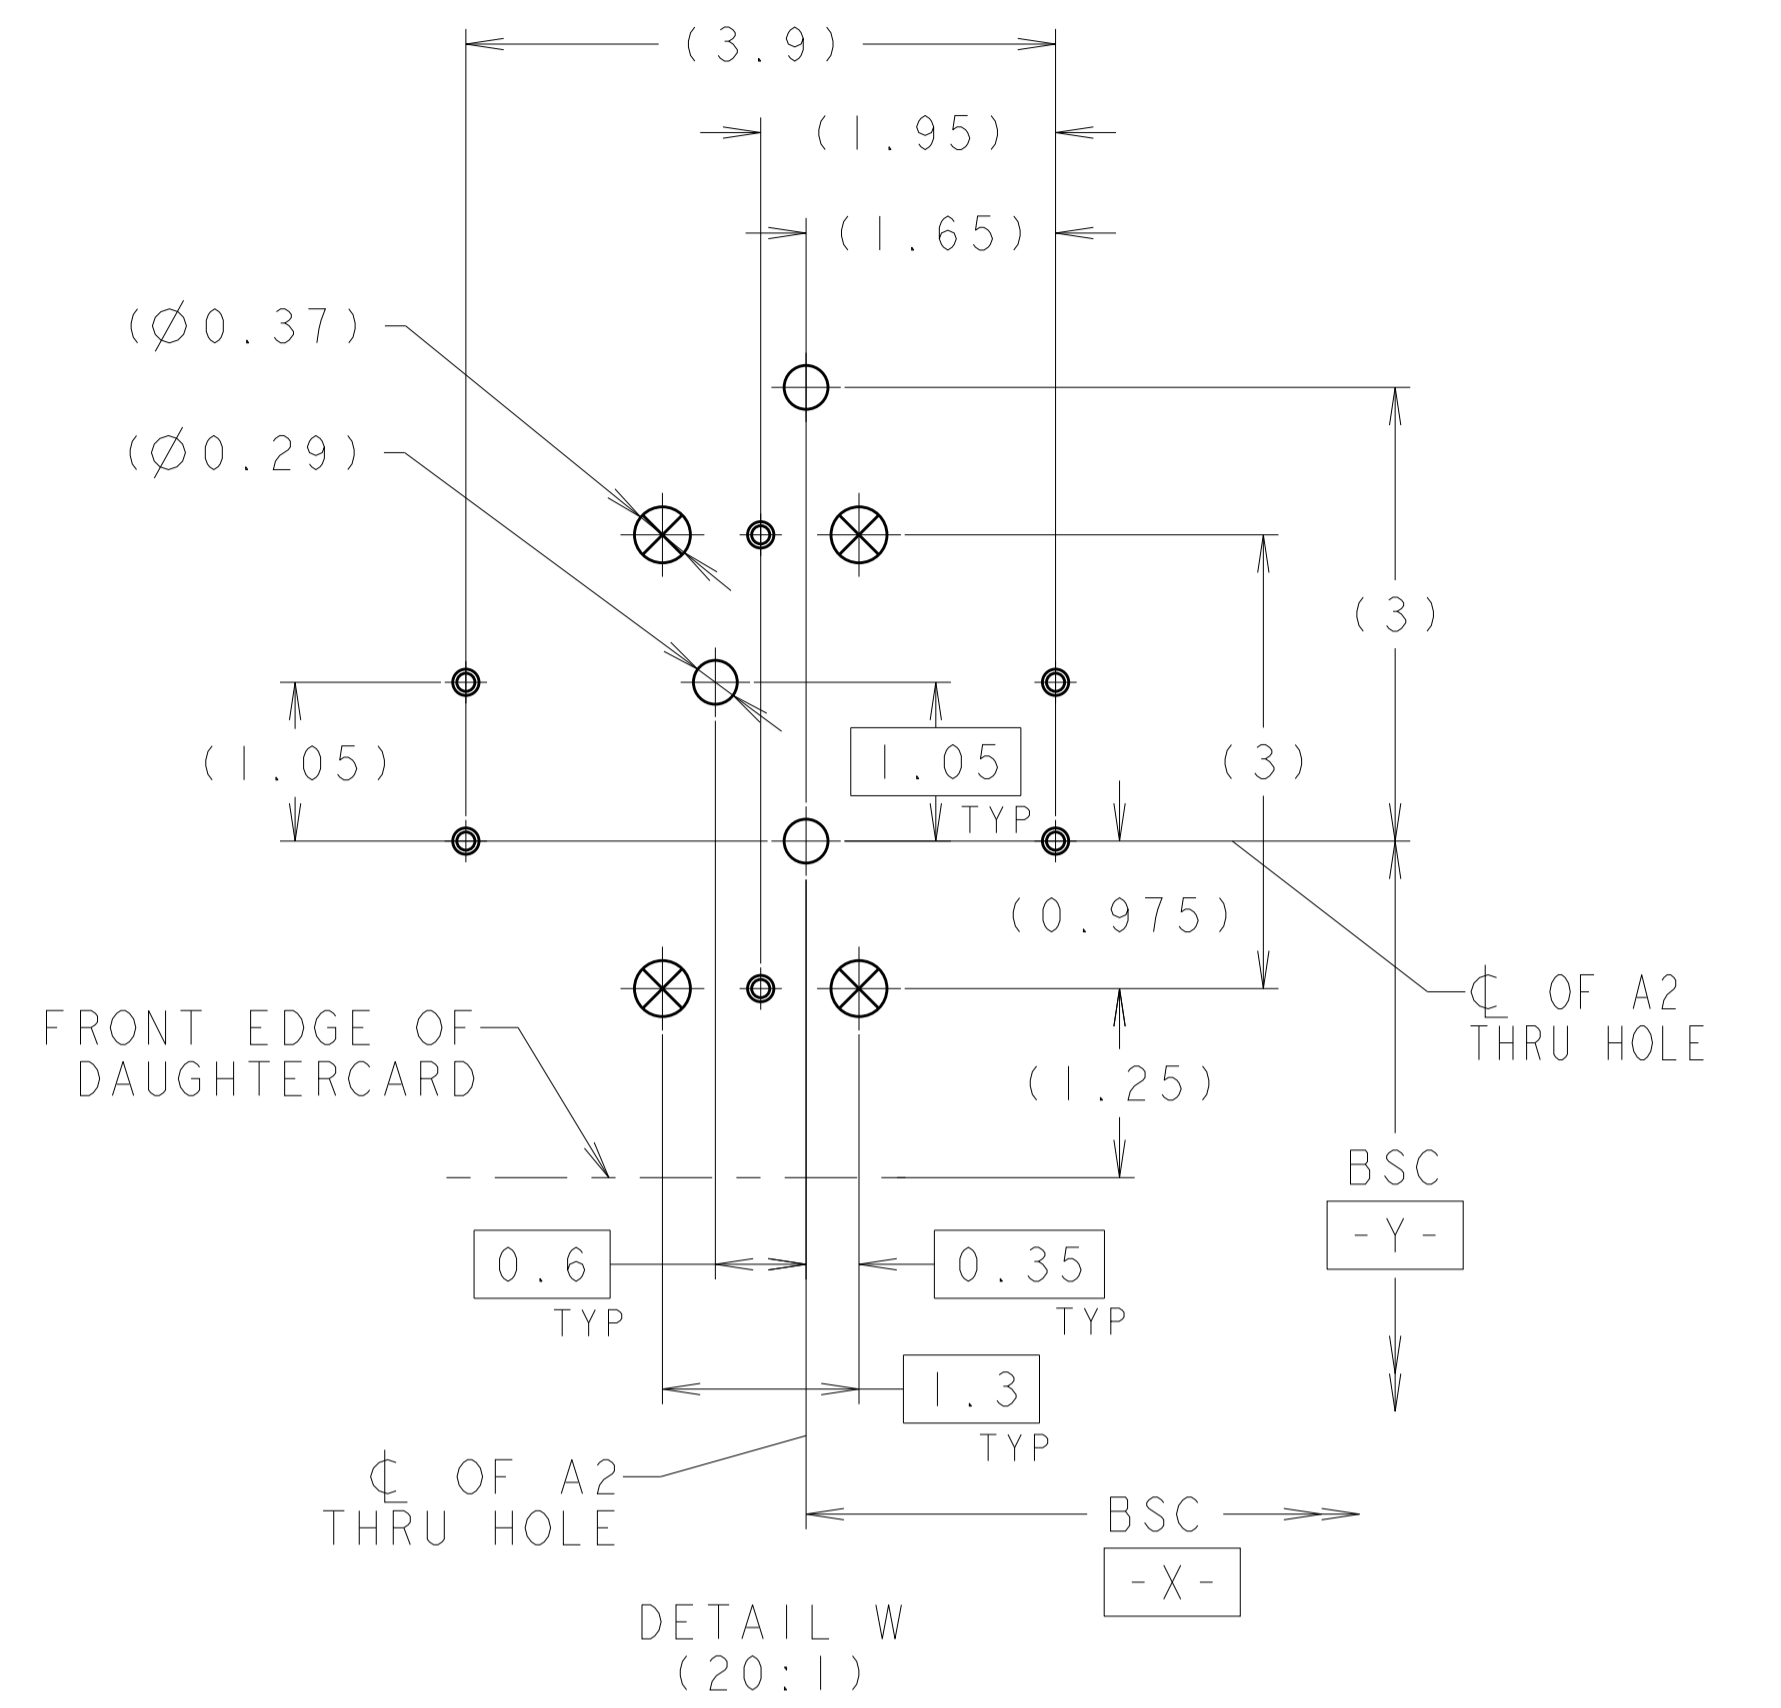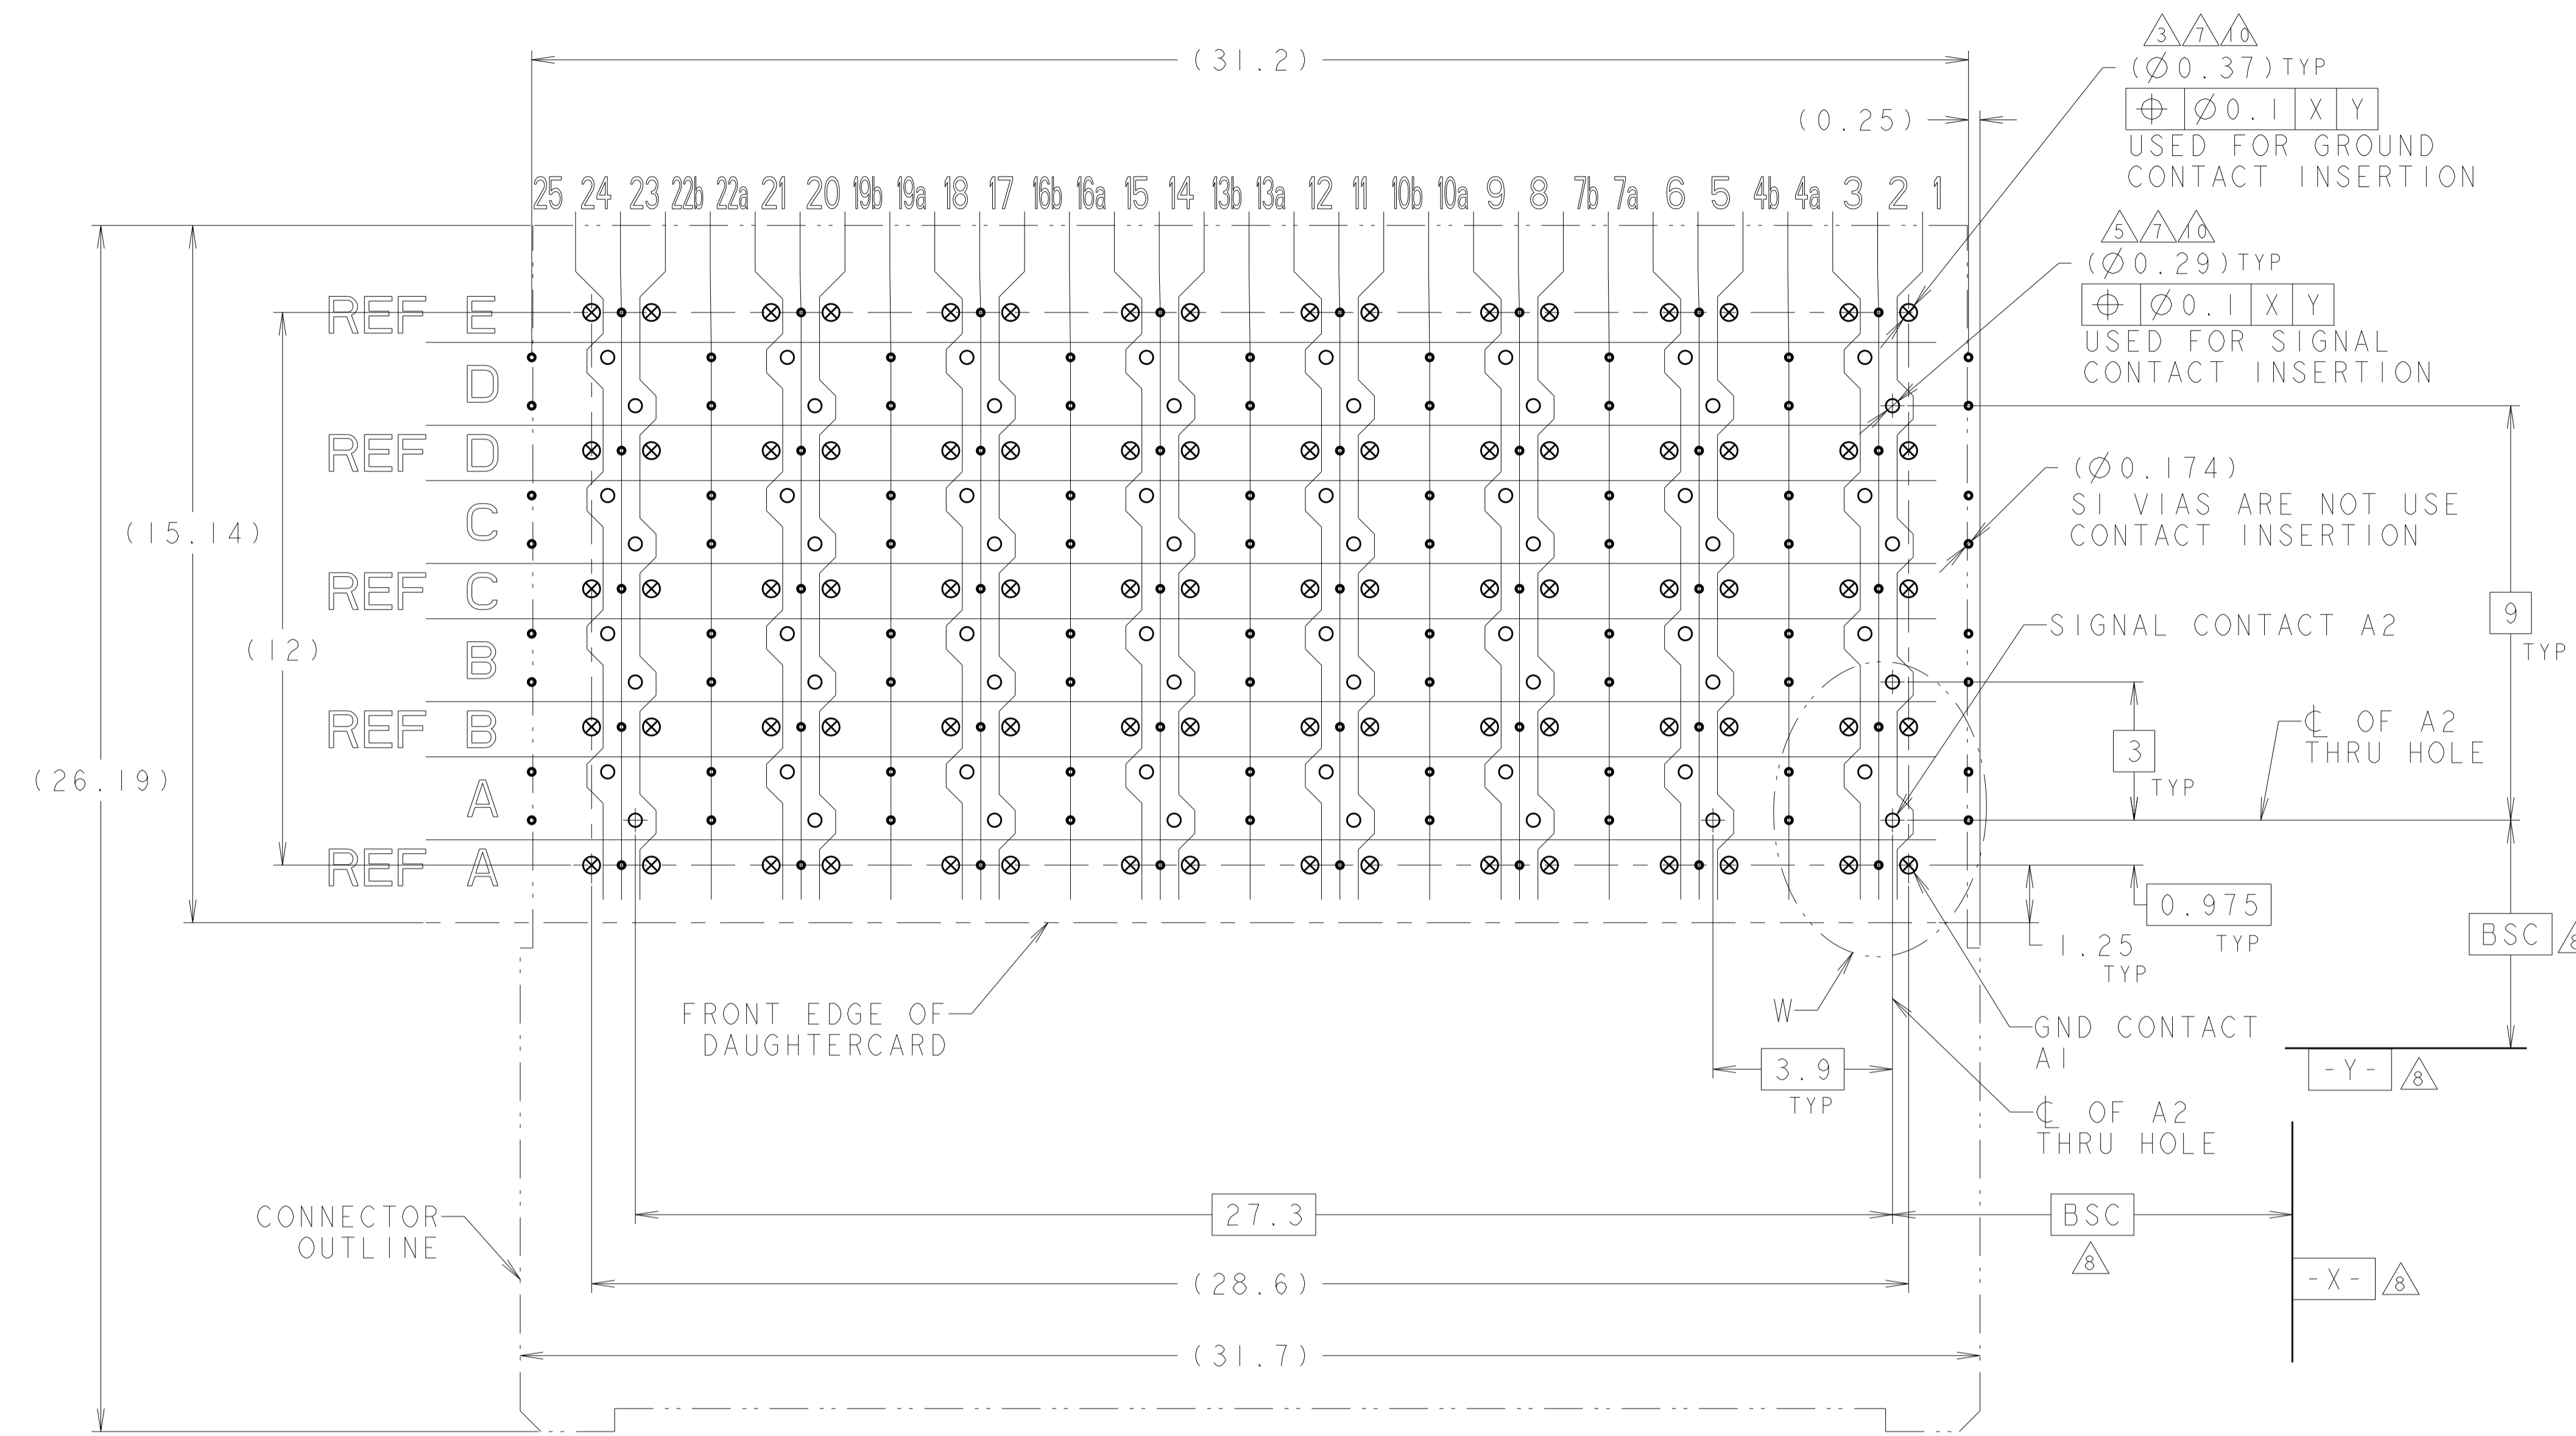

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	TE Connectivity
DIMENSIONS: mm		CHK	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	NAME RIGHT ANGLE RECEPTACLE ASSEMBLY 4 PAIR 8 COLUMN, 92 OHM, PAIR-IN-ROW, STRADA WHISPER R
0 PLC ±0.3		PRODUCT SPEC	
1 PLC ±0.3		APPLICATION SPEC	
2 PLC ±0.3		WEIGHT	
3 PLC ±0.3		CUSTOMER DRAWING	SIZE CAGE CODE DRAWING NO A1 0079 ©=2329739
4 PLC ±0.3		SCALE	1:1 SHEET 2 OF 2 REV A1
ANGLES			
FINISH			

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)