
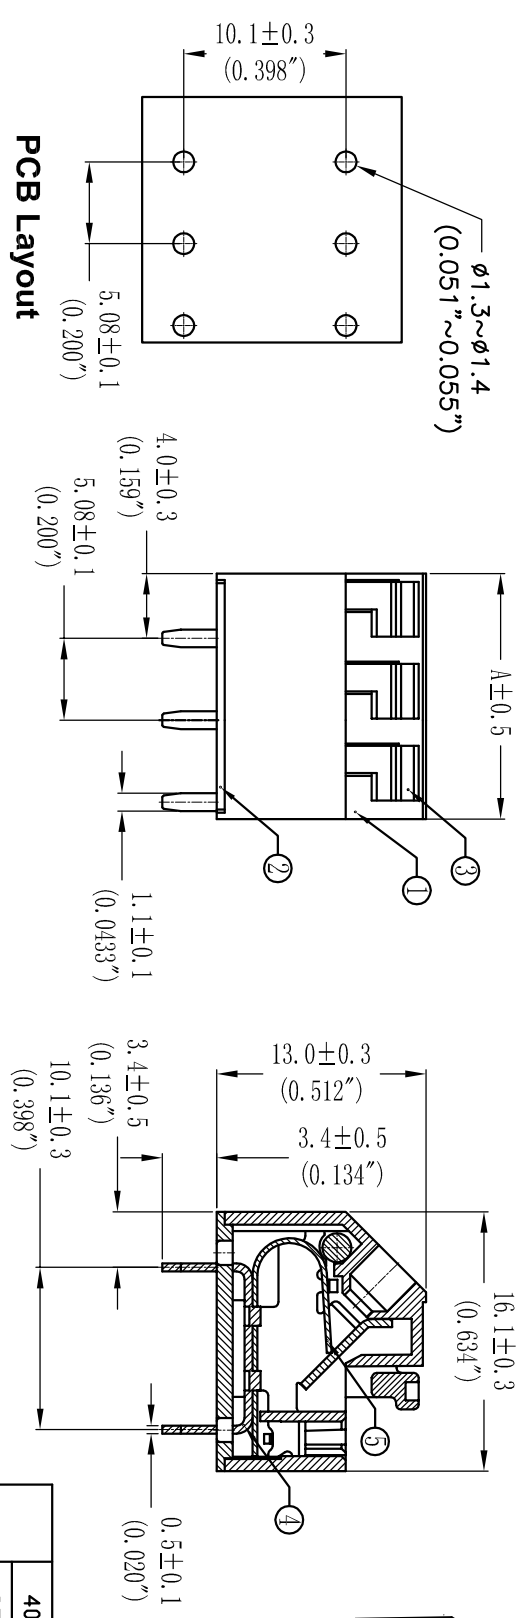
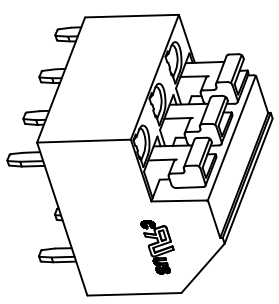
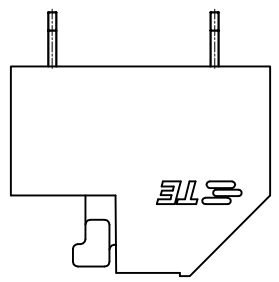
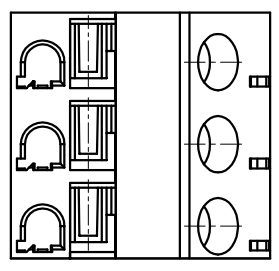


REV. NO.	DATE	BY	CHK	APP'D
1	23NOV2015	GF	SKM	

REV. NO.	DESCRIPTION	DATE	BY	CHK	APP'D
1		23NOV2015	GF	SKM	

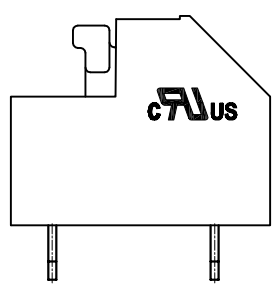

NO. OF POSITIONS	PART NO
2 POSN	2834114-1
3 POSN	2834114-2
4 POSN	2834114-3
5 POSN	2834114-4
6 POSN	2834114-5
7 POSN	2834114-6
8 POSN	2834114-7

COLOR	NO. OF POSITIONS	PART NO
GRAY	20,32	2834114-3
GRAY	15,24	2834114-2
GRAY	10,16	2834114-1

**PCB Layout**

NOTES :

- △ MATERIALS AND FINISH:
  - HOUSING: PA66
  - CONTACTS: BRASS, FINISH: TIN OVER NICKEL UNDERPLATE
- 2. MUST COMPLY WITH DIRECTIVE 2002/95/EC (ROHS)
- 3. WIRE TYPES AND SIZES ACCEPTED
  - WIRE RANGE: 14AWG~20AWG.
  - STRIP LENGTH: 5.0mm~6.0mm
- 4. PACKAGED IN TRAY.
- 5. CURRENT RATING: 12Amp AC300V.
- 6. OPERATION TEMPERATURE: -40°C TO +105°C
- 7. THIS PART NO. IS THE SAME STRUCTURE AS THE SERIES: 2834114 THE DATASHEET AND MORE DETAILS PLEASE FOLLOW THE SERIES: 2834114

THIS DRAWING IS A CONTROLLED DOCUMENT.

DESIGNER	CHK	DATE	REV
WJ	WJ	23NOV2015	1

DATE	BY	CHK	APP'D
23NOV2015	GF	SKM	

ITEM NO.	REV	DATE	BY	CHK	APP'D
108-137153	1	23NOV2015	GF	SKM	

SIZE	CODE	ISSUING NO.	RESTRICTED TO
A2	00779	C-2834114	-

5.08mm Top Entry Modular Screwless Conn.

STE TE Connectivity

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)