

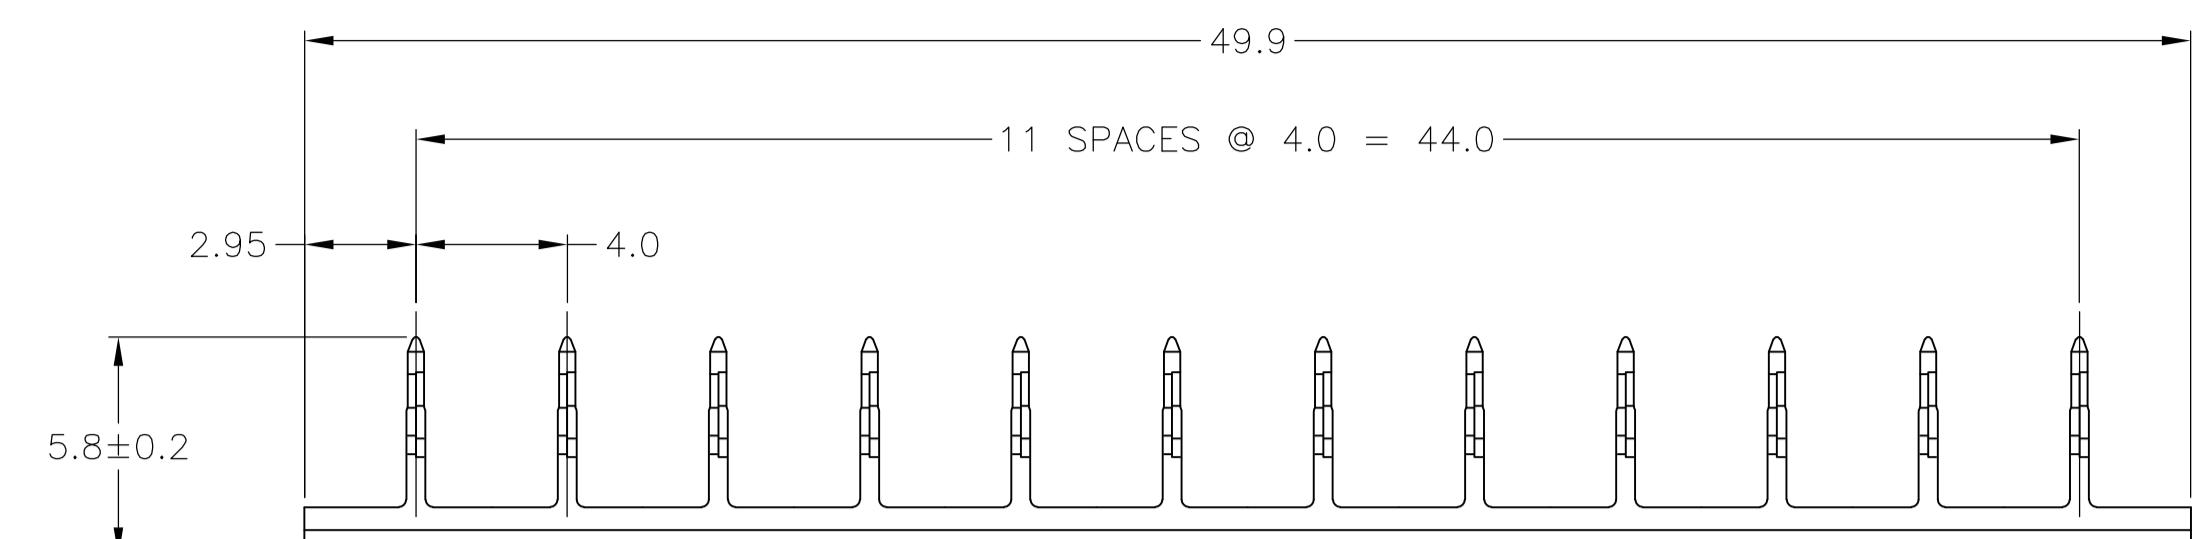
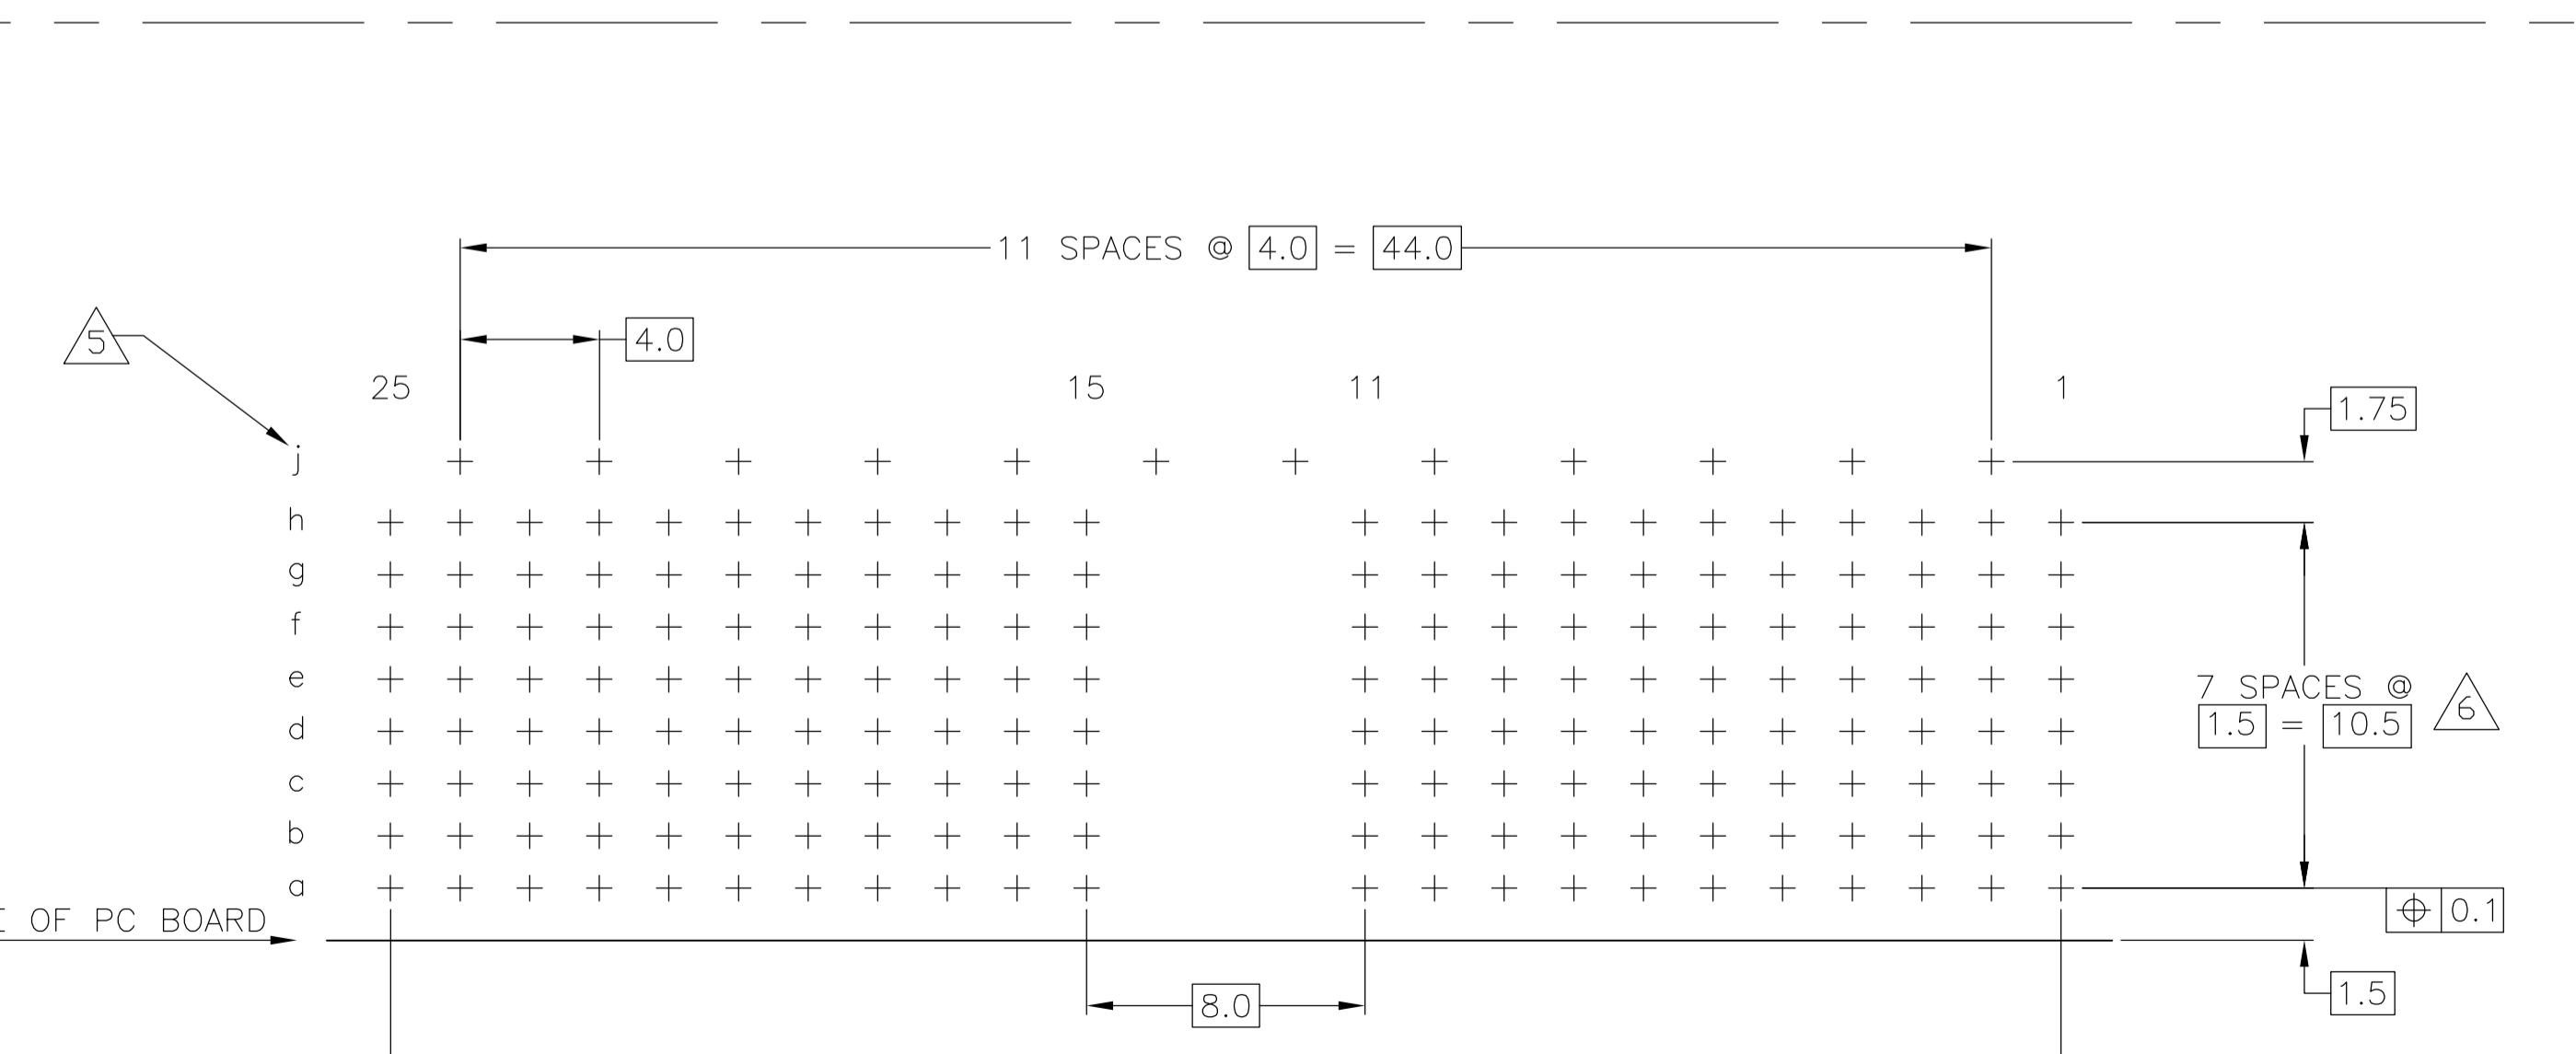


LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		B		REVISED PER ECO-07-030174	26MAR08	DH	JE
		B1		REVISED PER ECO-10-000444	02NOV09	KK	AEG
		C		ECR-10-018652	10SEP10	SW	MQW

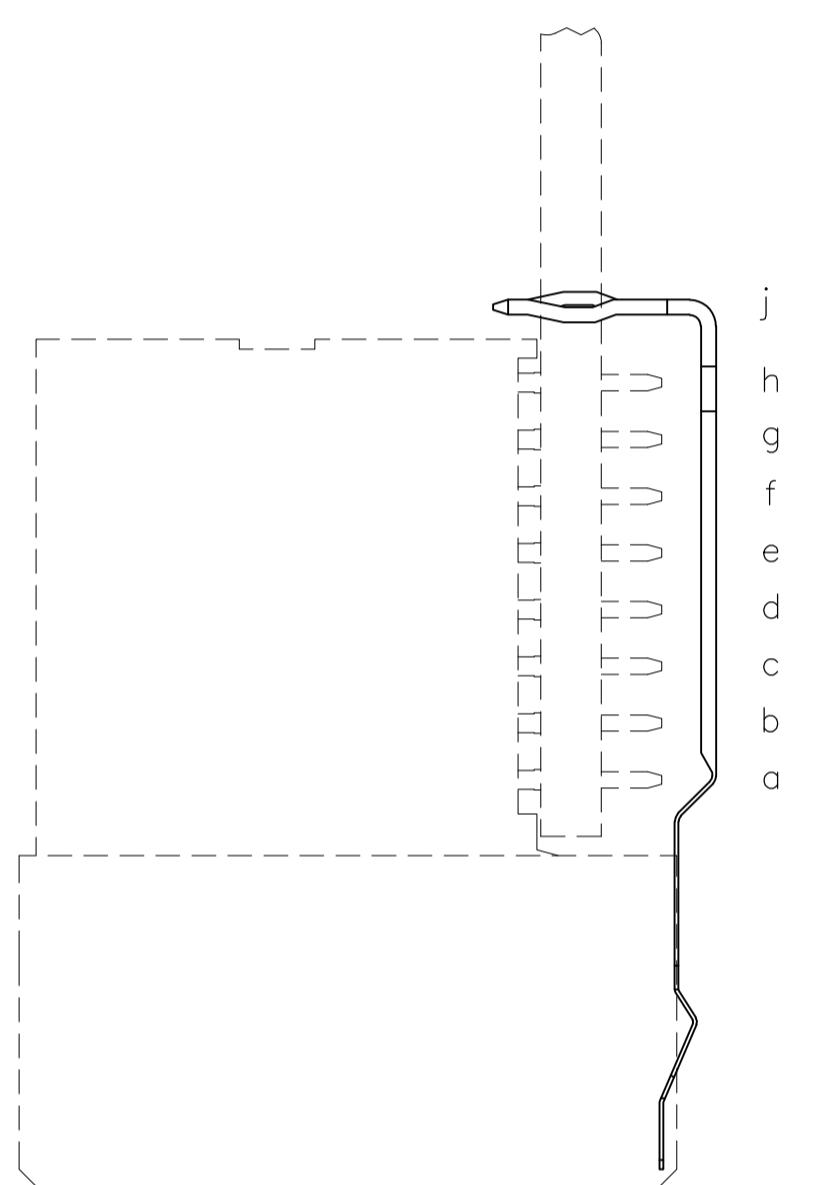

- 1 MATERIAL: CONTACT: PHOSPHOR BRONZE.
- 2 GENERAL PLATING SPECIFICATION: UNDERPLATING (ENTIRE CONTACT): 1.27µm MIN NICKEL AND ACTION PIN: 0.5µm MIN TIN. FOR PLATING OF MATING SURFACES SEE APPLICABLE SPECIFICATION REFERENCE FOR EACH DASH NUMBER.
- 3 CONFORMS TO ALL TESTING ACCORDING TO IEC 61076-4-101 PERFORMANCE LEVEL 2.
- 4 CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL 3, CENTRAL OFFICE APPLICATIONS.
- 5 ROW J 12 PLATED THROUGH HOLES FOR LOWER-SHIELD.
- 6 HOLE PATTERN FOR FEMALE CONNECTOR TYPE A. 176 PLATED-THROUGH HOLES A 1.5 X 2mm GRID.
- 7 CONTACT AREA LUBRICATED WITH BELLCORE APPROVED LUBRICANT. TECHNICAL REFERENCE: GR-1217-CORE, ISSUE 1, NOVEMBER 1995.
- 8 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

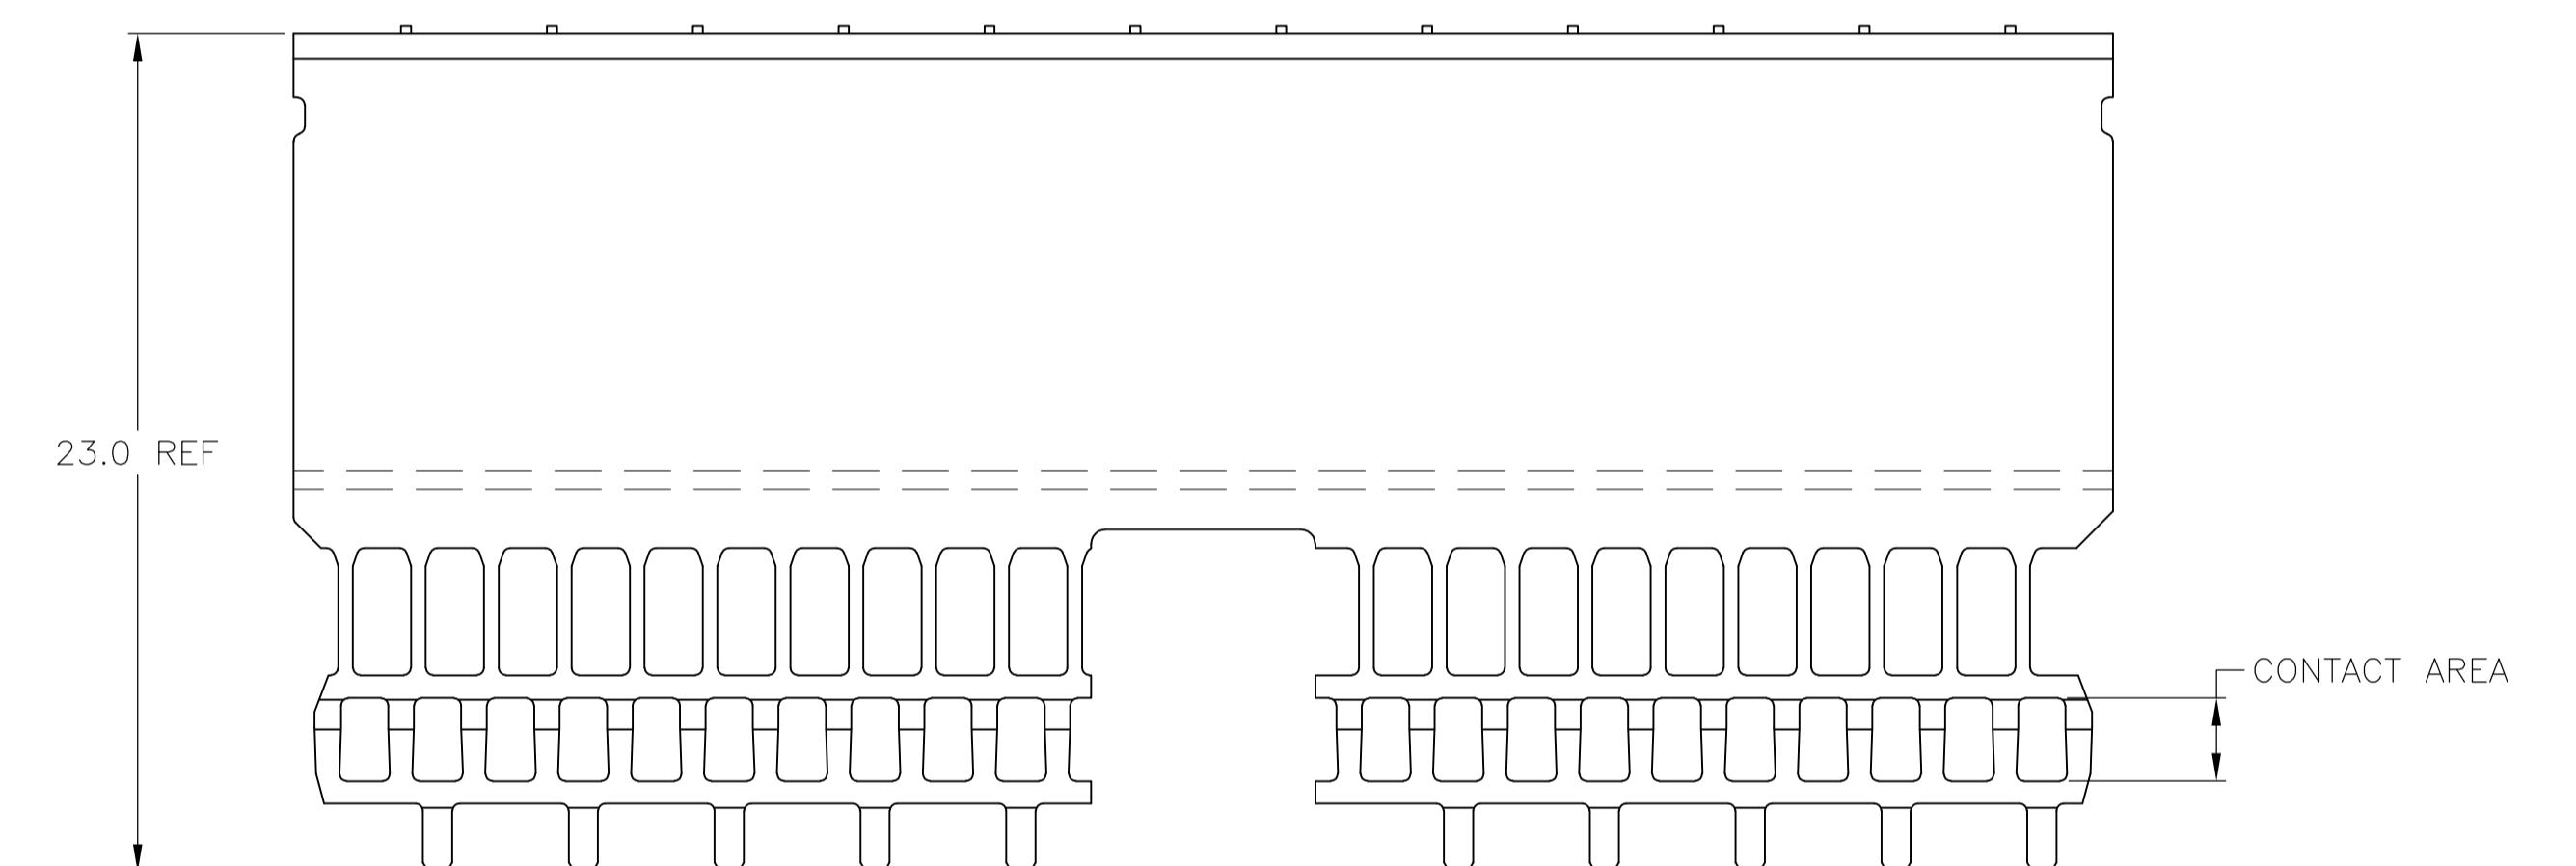

COMPONENT SIDE AS SHOWN  
RECOMMENDED PCB-HOLE LAYOUT

PCB HOLE DIM ACTION PIN  
DRILLED HOLE: 0.7±0.025  
FIN HOLE: 0.55 TO 0.65mm  
Cu-thk: 0.025 TO 0.050mm  
SnPb-thk: 0.004 TO 0.010mm

THIS DRAWING IS A CONTROLLED DOCUMENT.		DRW	28JUL05	Tyco Electronics Corporation	
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:	28JUL05	NAME	
mm	APVD	G_SKIPPER	28JUL05	GROUND RETURN LOWER-SHIELD, TYPE D	
9-PLE	± 0.05	± 0.1	± 0.2	Z-PACK 2mm HM 8 ROW, FEMALE	
2-PLE	± 0.05	± 0.1	± 0.2	(INTEGRATED VERSION)	
4-PLE	± 0.05	± 0.1	± 0.2		
6-PLE	± 0.05	± 0.1	± 0.2		
MATERIAL	SEE TABLE	FINISH	WEIGHT	SIZE	CAGE CODE DRAWING NO
			-	A1	00779 C 5646428
				RESTRICTED TO	
				CUSTOMER DRAWING	
				SCALE	5:1
				SHEET	1 OF 1
				REV	C

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)