
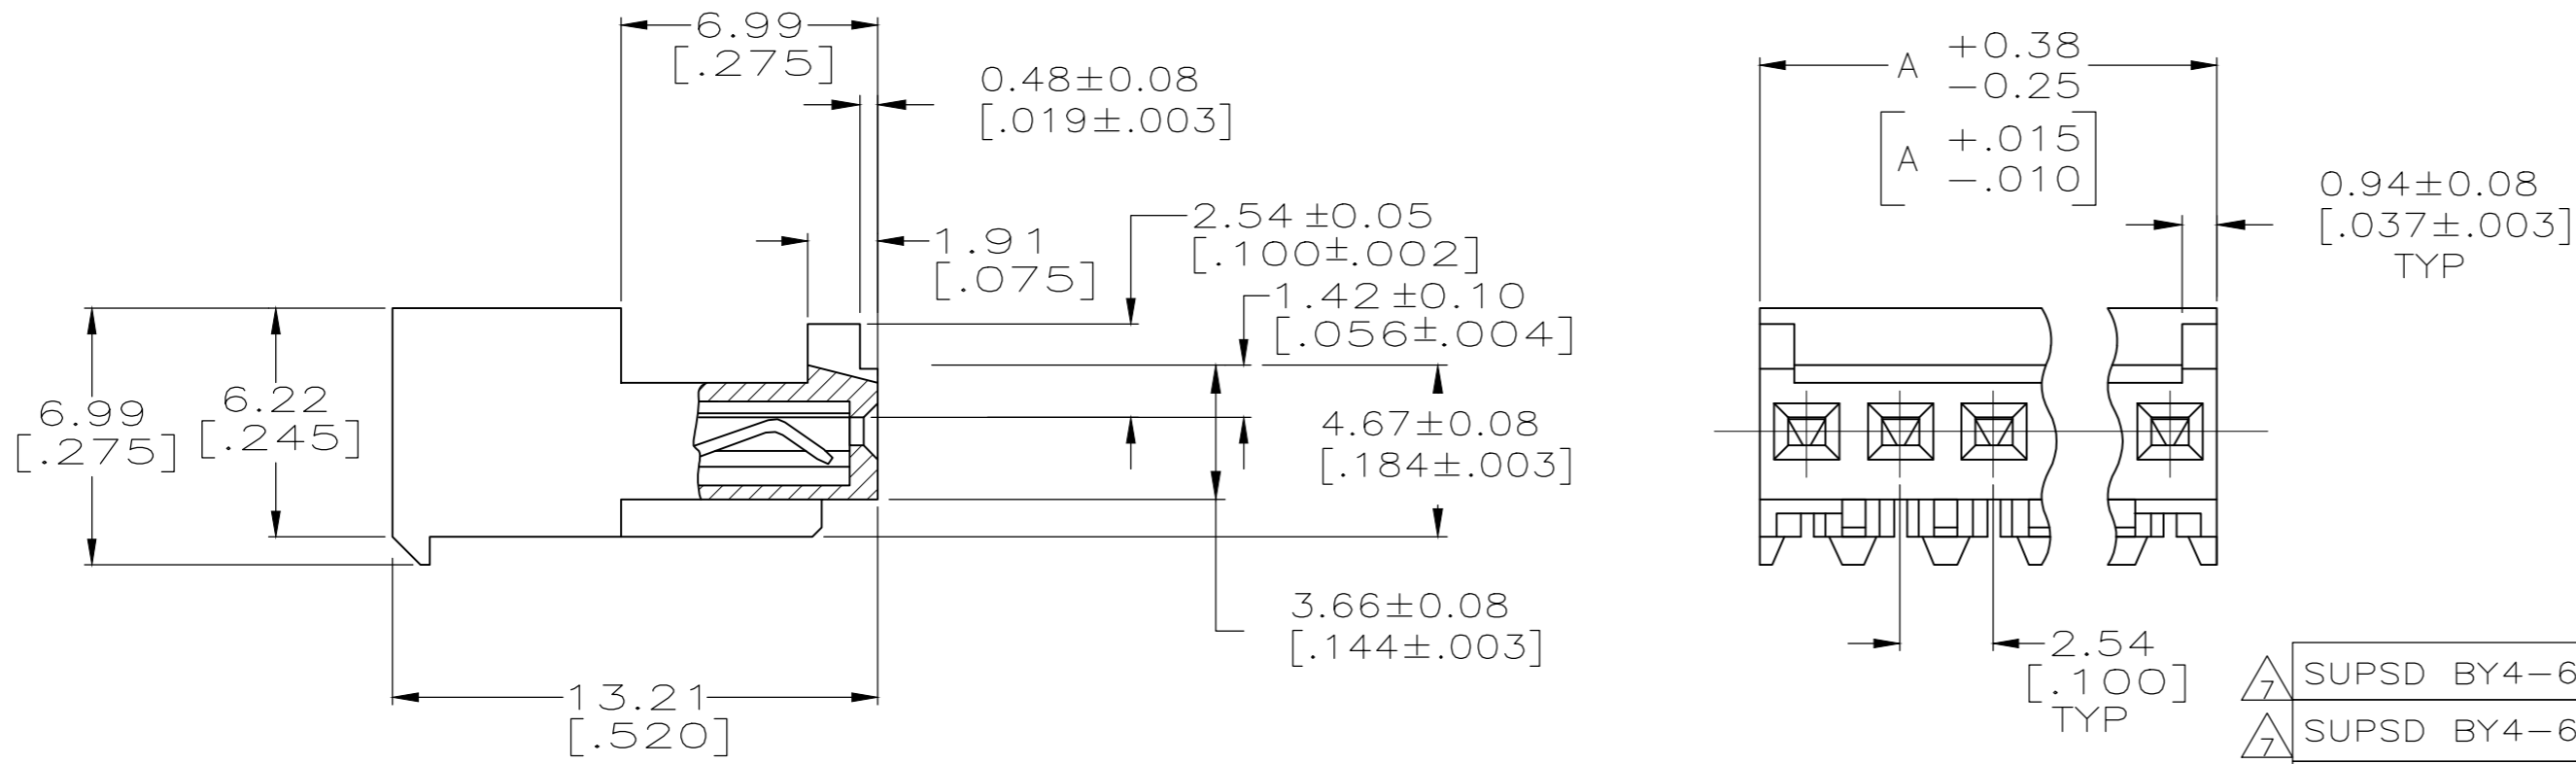


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
CM	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		H3		REVISED PER ECR-17-018425	16APR2018	BDA	SG

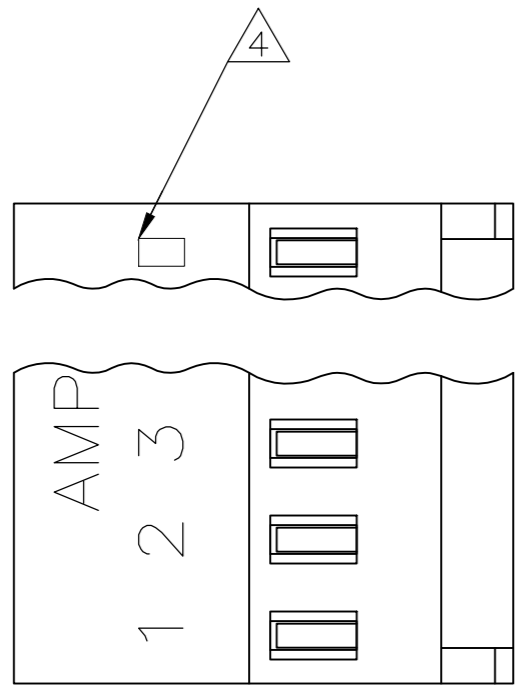

LEAD	LEAD	LEAD	LEAD
38.10	[1.500]	15	4-644083-5
35.56	[1.400]	14	4-644083-4
33.02	[1.300]	13	4-644083-3
30.48	[1.200]	12	4-644083-2
27.94	[1.100]	11	4-644083-1
25.40	[1.000]	10	4-644083-0
22.86	[.900]	9	3-644083-9
20.32	[.800]	8	3-644083-8
17.78	[.700]	7	3-644083-7
15.24	[.600]	6	3-644083-6
12.70	[.500]	5	3-644083-5
10.16	[.400]	4	3-644083-4
7.62	[.300]	3	3-644083-3
5.08	[.200]	2	3-644083-2

① MATERIAL: CONNECTOR-NYLON UL94V-0 (BLACK)
 CONTACTS-0.30 [.012] THICK COPPER ALLOY
 BRIGHT TIN-LEAD 0.00203 [.000080] MIN THICK FOR CONTACTS
 644083-2 THRU 1-644083-5
 MATTE WHISKER MITIGATED TIN PLATE 0.00203 [.000080] MIN THICK
 OVER 0.00076 [.000030] MIN THICK NICKEL FOR CONTACTS
 3-644083-2 THRU 4-644083-5

2. CONTACTS ACCEPT 22 AWG WIRE WITH 1.52 [.060] MAX INSULATION DIAMETER.
 3. CONTACTS MUST ACCEPT 0.64±0.03 [.025±.001] SQUARE POST AND REMAIN LOCKED IN POSITION.
 ④ IDENTIFICATION NUMBER FOR LAST CIRCUIT MAY NOT APPEAR ON ALL ASSEMBLIES.

5. DIMENSIONS IN BRACKETS ARE IN INCHES.
 6. HOUSING FEATURES ARE: CLOSED END WITH LOCKING RAMP AND WITH POLARIZING TAB.

⑦ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI
 ⑧ OBSOLETE PARTS

⑦	SUPSD BY4-644083-5
⑦	SUPSD BY4-644083-4
⑧	SUPSD BY4-644083-3
⑦	SUPSD BY4-644083-2
⑧	SUPSD BY4-644083-1
⑧	SUPSD BY4-644083-0
⑦	SUPSD BY3-644083-9
⑧	SUPSD BY3-644083-8
⑦	SUPSD BY3-644083-7
⑧	SUPSD BY3-644083-6
⑧	SUPSD BY3-644083-5
⑧	SUPSD BY3-644083-4
⑧	SUPSD BY3-644083-3
⑧	SUPSD BY3-644083-2

LEAD	LEAD	LEAD	LEAD
38.10	[1.500]	15	1-644083-5
35.56	[1.400]	14	1-644083-4
33.02	[1.300]	13	1-644083-3
30.48	[1.200]	12	1-644083-2
27.94	[1.100]	11	1-644083-1
25.40	[1.000]	10	1-644083-0
22.86	[.900]	9	—644083-9
20.32	[.800]	8	—644083-8
17.78	[.700]	7	—644083-7
15.24	[.600]	6	—644083-6
12.70	[.500]	5	—644083-5
10.16	[.400]	4	—644083-4
7.62	[.300]	3	—644083-3
5.08	[.200]	2	—644083-2

DIM A	NO.OF POSN	ASSEMBLY
-------	------------	----------

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. CARPENTER 12JUN2003	TE Connectivity	
DIMENSIONS: mm [INCHES]		CHK D. BOSSI 12JUN2003		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD D. BOSSI 12JUN2003	NAME	
0 PLC ±	± 0.13 [.005]	PRODUCT SPEC	MTA 100 CONNECTOR ASSEMBLY, 22 AWG, UL94V-0, SPECIAL	
1 PLC ±		APPLICATION SPEC	SIZE	CAGE CODE
2 PLC ±		114-1019	A2	00779
3 PLC ±		FINISH	DRAWING NO C=644083	
4 PLC ±	①	WEIGHT	RESTRICTED TO	
ANGLES ±		CUSTOMER DRAWING	SCALE	SHEET
			5:1	1 of 1
				REV H3

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)