
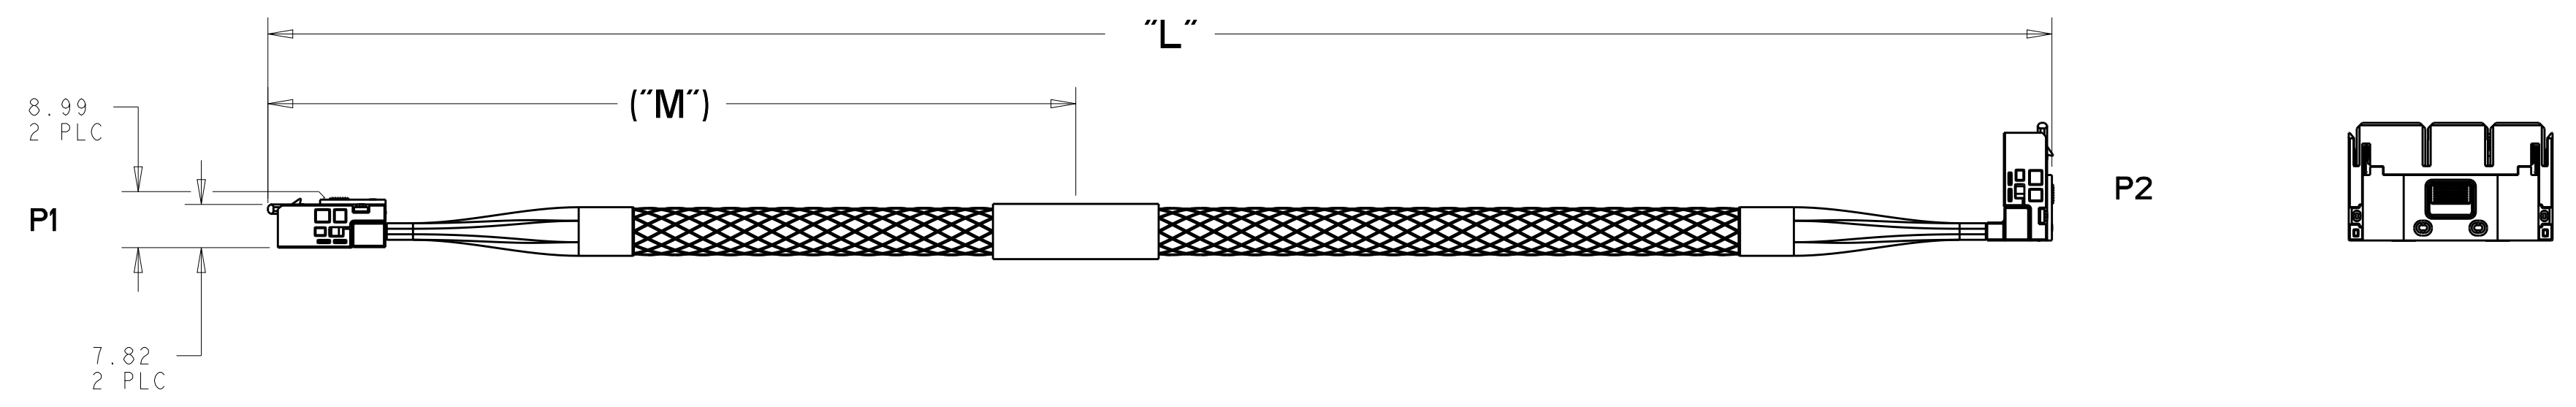


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
 © COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

| REVISIONS | | | | |
|-----------|-----|---------------------------|-----------|-------|
| P | LTR | DESCRIPTION | DATE | APVD |
| A | | REVISED PER ECO-19-012048 | 04AUG2019 | MY DZ |
| | | | | |
| | | | | |

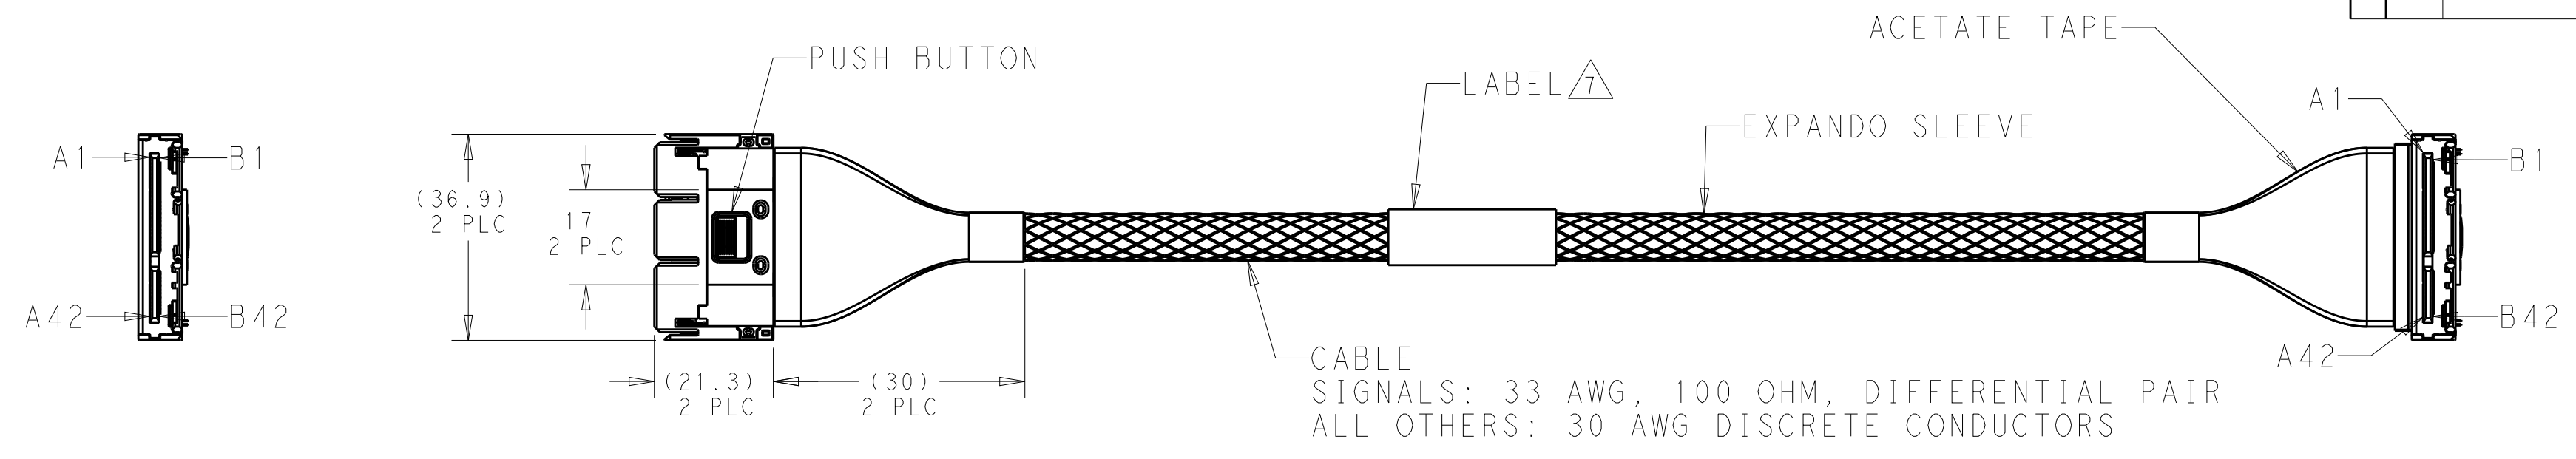

1. ALL MATERIALS, COMPONENTS AND PROCESS SHALL COMPLY WITH TEC-138-702. (CONTAINS NO BANNED OR RESTRICTED SUBSTANCES).
2. NO REACH SvHC SHALL BE CONTAINED ABOVE THE THRESHOLD AS DEFINED IN REACH SvHC COMPLIANCE DEFINITION IN ANNEX A OF TEC-138-702.
3. ASSEMBLY TESTED FOR CONTINUITY, OPENS, SHORTS, AND SIGNAL INTEGRITY.
4. CABLE BEND RADIUS 5X BUNDLE CABLE OD.
5. SEE SHEET 2 AND 3 FOR WIRING SCHEMATIC.
6. CONNECTORS ARE GEN-Z COMPLIANT.

△ LABEL INFORMATION SHOWN BELOW:

| | | | |
|----------------------|---------------|----------------------------|----------------------------|
| TE LOGO | | 2349838-X | TE P/N |
| DATE CODE & SERIAL # | YYWWSSSS | BARCODE-CODE 39 "YYWWSSSS" | BARCODE (DATECODE/SERIAL#) |
| COUNTRY OF ORIGIN | MADE IN _____ | | |

8. CABLE CONNECTOR MATES WITH TE SLIVER RECEPTACLE P/N 2331813-X, OR 2331814-X.

| | | |
|-------|-------------|-----------|
| 500 | 1000 +10/-0 | 2349838-2 |
| 250 | 500 +10/-0 | 2349838-1 |
| ("M") | "L" | TE P/N |

| | | | | |
|--|--|--------------------------|--|--|
| THIS DRAWING IS A CONTROLLED DOCUMENT. | | DWN T. SMITH 09JAN2019 | TE Connectivity | |
| | | CHK G. GUTGOLD 09JAN2019 | | |
| DIMENSIONS: | TOLERANCES UNLESS OTHERWISE SPECIFIED: | APVD - | NAME SLIVER 2.0 2C 33AWG 100 OHM STRAIGHT TO RIGHT ANGLE | |
| mm | 0 PLC ± | PRODUCT SPEC - | SIZE CAGE CODE DRAWING NO RESTRICTED TO | |
| | 1 PLC ±0.5 | APPLICATION SPEC - | A200779 C-2349838 | |
| | 2 PLC ±0.13 | WEIGHT - | SCALE 1:1 SHEET 1 OF 3 REV A | |
| | 3 PLC ±0.013 | CUSTOMER DRAWING | | |
| | 4 PLC ±0.0001 | | | |
| | ANGLES ± | | | |
| | FINISH - | | | |


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
 © COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

| REVISIONS | | | | |
|-----------|-----|-------------|------|------|
| P | LTR | DESCRIPTION | DATE | APVD |
| - | - | SEE SHEET 1 | - | - |
| | | | | |
| | | | | |

| P1 | WIRE TYPE | P2 | | |
|---------|-----------|-------------|----------|---------|
| | | DESIGNATION | PAIR NO. | |
| PIN NO. | PAIR NO. | DESIGNATION | PAIR NO. | PIN NO. |
| A1 | | GROUND | | A1 |
| A2 | | GROUND | | A2 |
| A3 | | GROUND | | A3 |
| A4 | | GROUND | | A4 |
| A5 | | GROUND | | A5 |
| A6 | | GROUND | | A6 |
| A7 | | SIDE BAND | | A7 |
| A8 | | SIDE BAND | | A8 |
| A9 | | SIDE BAND | | A9 |
| A10 | | SIDE BAND | | A10 |
| A11 | | SIDE BAND | | A11 |
| A12 | | SIDE BAND | | A12 |
| A13 | | GND | | A13 |
| A14 | | CLK | | A14 |
| A15 | | CLK | | A15 |
| A16 | | GND | | A16 |
| A17 | 0 | PCIeTX | 0 | A17 |
| A18 | 0 | PCIe TX | 0 | A18 |
| A19 | | GND | | A19 |
| A20 | 1 | PCIeTX | 1 | A20 |
| A21 | 1 | PCIe TX | 1 | A21 |
| A22 | | GND | | A22 |
| A23 | 2 | PCIeTX | 2 | A23 |
| A24 | 2 | PCIe TX | 2 | A24 |
| A25 | | GND | | A25 |
| A26 | 3 | PCIeTX | 3 | A26 |
| A27 | 3 | PCIe TX | 3 | A27 |
| A28 | | GND | | A28 |
| | | KEY | | |
| A29 | | GND | | A29 |
| A30 | 4 | PCIeTX | 4 | A30 |
| A31 | 4 | PCIe TX | 4 | A31 |
| A32 | | GND | | A32 |
| A33 | 5 | PCIeTX | 5 | A33 |
| A34 | 5 | PCIe TX | 5 | A34 |
| A35 | | GND | | A35 |
| A36 | 6 | PCIeTX | 6 | A36 |
| A37 | 6 | PCIe TX | 6 | A37 |
| A38 | | GND | | A38 |
| A39 | 7 | PCIeTX | 7 | A39 |
| A40 | 7 | PCIe TX | 7 | A40 |
| A41 | | GND | | A41 |
| A42 | | SIDE BAND | | A42 |

COMMONED


COMMONED

| | | | |
|--|--|----------------------------------|---|
| THIS DRAWING IS A CONTROLLED DOCUMENT. | | DWN T. SMITH 09 JAN 2019 |  TE Connectivity |
| DIMENSIONS: mm | | CHK G. GUTGOLD 09 JAN 2019 | |
| TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ±0.5 2 PLC ±0.13 3 PLC ±0.013 4 PLC ±0.001 ANGLES ± | | APVD - | NAME SLIVER 2.0 2C 33AWG 100 OHM STRAIGHT TO RIGHT ANGLE |
| MATERIAL - | | PRODUCT SPEC - | SIZE A200779 |
| FINISH - | | APPLICATION SPEC - | CAGE CODE C-2349838 |
| - | | WEIGHT - | DRAWING NO - |
| - | | CUSTOMER DRAWING | RESTRICTED TO - |
| - | | SCALE 1:1 | SHEET 2 OF 3 |
| - | | REV A | |

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
 © COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

| REVISIONS | | | | |
|-----------|-----|-------------|------|------|
| P | LTR | DESCRIPTION | DATE | APVD |
| - | - | SEE SHEET 1 | - | - |
| | | | | |
| | | | | |

| P1 | WIRE TYPE | P2 | | |
|---------|-----------|---------------|----------|---------|
| | | DESIGNATION | PAIR NO. | |
| PIN NO. | PAIR NO. | DESIGNATION | PAIR NO. | PIN NO. |
| B1 | | 12V POWER | | B1 |
| B2 | | 12V POWER | | B2 |
| B3 | | 12V POWER | | B3 |
| B4 | | 12V POWER | | B4 |
| B5 | | 12V POWER | | B5 |
| B6 | | 12V POWER | | B6 |
| B7 | | SIDE BAND | | B7 |
| B8 | | SIDE BAND | | B8 |
| B9 | | SIDE BAND | | B9 |
| B10 | | SIDE BAND | | B10 |
| B11 | | 3.3 AUX POWER | | B11 |
| B12 | | SIDE BAND | | B12 |
| B13 | | GND | | B13 |
| B14 | | CLK | | B14 |
| B15 | | CLK | | B15 |
| B16 | | GND | | B16 |
| B17 | 0 | PCIe RX | 0 | B17 |
| B18 | 0 | PCIe RX | 0 | B18 |
| B19 | | GND | | B19 |
| B20 | 1 | PCIe RX | 1 | B20 |
| B21 | 1 | PCIe RX | 1 | B21 |
| B22 | | GND | | B22 |
| B23 | 2 | PCIe RX | 2 | B23 |
| B24 | 2 | PCIe RX | 2 | B24 |
| B25 | | GND | | B25 |
| B26 | 3 | PCIe RX | 3 | B26 |
| B27 | 3 | PCIe RX | 3 | B27 |
| B28 | | GND | | B28 |
| B29 | | KEY | | B29 |
| B30 | 4 | PCIe RX | 4 | B30 |
| B31 | 4 | PCIe RX | 4 | B31 |
| B32 | | GND | | B32 |
| B33 | 5 | PCIe RX | 5 | B33 |
| B34 | 5 | PCIe RX | 5 | B34 |
| B35 | | GND | | B35 |
| B36 | 6 | PCIe RX | 6 | B36 |
| B37 | 6 | PCIe RX | 6 | B37 |
| B38 | | GND | | B38 |
| B39 | 7 | PCIe RX | 7 | B39 |
| B40 | 7 | PCIe RX | 7 | B40 |
| B41 | | GND | | B41 |
| B42 | | SIDE BAND | | B42 |

| | | | |
|--|--|----------------------------------|---|
| THIS DRAWING IS A CONTROLLED DOCUMENT. | | DWN T. SMITH 09 JAN 2019 |  TE Connectivity |
| DIMENSIONS: mm | | CHK G. GUTGOLD 09 JAN 2019 | |
| TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ±0.5 2 PLC ±0.13 3 PLC ±0.013 4 PLC ±0.001 ANGLES ± | | APVD - | NAME SLIVER 2.0 2C 33AWG 100 OHM STRAIGHT TO RIGHT ANGLE |
| MATERIAL - | | PRODUCT SPEC - | SIZE A200779 |
| FINISH - | | APPLICATION SPEC - | CAGE CODE C-2349838 |
| - | | WEIGHT - | DRAWING NO - |
| - | | CUSTOMER DRAWING | RESTRICTED TO - |
| - | | SCALE 1:1 | SHEET 3 OF 3 |
| - | | REV A | |

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)