

REV. 1

DCO 141326


COIL: @ 25°C	
RESISTANCE	650 OHMS ± 10%
NOMINAL VOLTAGE	18.0 VDC
MUST OPERATE	9.5 VDC
MUST RELEASE	5.6 VDC MAX, 1.0 VDC MIN.

ENVIRONMENT:

VIBRATION	10	CPS TO	3000	CPS @	30	g's
SHOCK	75	g's	6	MS. DURATION		
TEMPERATURE	-65	°C TO	+125	°C		

NOTES: OPERATE & RELEASE 4 MS MAX.
BOUNCE 2 MS MAX.

CUSTOMER DATA SHEET

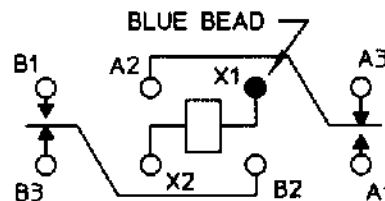

TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO
2 AMPS 28 VDC RESISTIVE
50,000 OPERATIONS

DR. R.B. 1/20/98 CK. GAH 9/20/99



CUST. OPL
CUST. NO. M39016/13-077L REV.

3SBC RELAY

3SBC1542A2

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)