


|  |  |                |         |
|--|--|----------------|---------|
| <b>SPECIFICATION CONTROL DRAWING</b>   |  | <b>82A3122</b> |         |
| Title  | TWO CONDUCTOR CABLE, SHIELDED, GENERAL PURPOSE, FLEXIBLE, 600 VOLT | Date:          | 7-14-10 |
|  |  | Revision:      | B       |
| This specification sheet forms a part of the latest issue of Raychem Specification 80. |  |                |         |

COMPONENT WIRES - 82A0112

SHIELD - SILVER-COATED COPPER

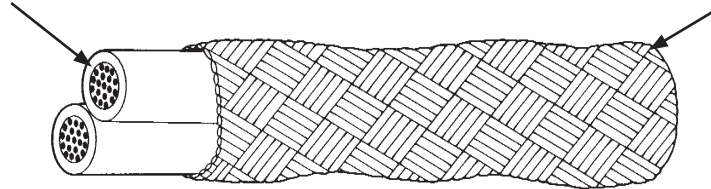


| CABLE CONSTRUCTION DETAILS   |                            |                         |                           |         |                                     |
|------------------------------|----------------------------|-------------------------|---------------------------|---------|-------------------------------------|
| PART NUMBER<br><sup>1/</sup> | CONDUCTOR<br>SIZE<br>(AWG) | SHIELD<br>SIZE<br>(AWG) | OUTSIDE DIAMETER<br>(in.) |         | MAXIMUM<br>WEIGHT<br>(lbs/1000 ft.) |
|                              |                            |                         | NOMINAL                   | MAXIMUM |                                     |
| 82A3122-28-*                 | 28                         | 38                      | .075                      | .080    | 5.3                                 |
| 82A3122-26-*                 | 26                         | 38                      | .083                      | .088    | 6.0                                 |
| 82A3122-24-*                 | 24                         | 38                      | .091                      | .096    | 7.8                                 |
| 82A3122-22-*                 | 22                         | 38                      | .103                      | .108    | 9.9                                 |
| 82A3122-20-*                 | 20                         | 38                      | .123                      | .129    | 13.4                                |
| 82A3122-18-*                 | 18                         | 38                      | .145                      | .152    | 19.4                                |
| 82A3122-16-*                 | 16                         | 38                      | .175                      | .184    | 27.8                                |
| 82A3122-14-*                 | 14                         | 38                      | .215                      | .226    | 42.3                                |
| 82A3122-12-*                 | 12                         | 38                      | .259                      | .272    | 61.1                                |

CABLE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 150°C  
 Maximum continuous conductor temperature  
 VOLTAGE RATING: 600 volts (rms) at sea level  
 DIELECTRIC WITHSTAND: 1500 volts (rms), 60 Hz  
 SHIELD COVERAGE: 85% (minimum)

PART NUMBER:  
 The "\*" in the part numbers above shall be replaced by color code designators with a slash separating the component wire colors.

<sup>1/</sup> Example: AWG 22, black and brown component wires:  
 82A3122-22-0/1

|  |   |  |  |
|--|---|--|--|
| Users should evaluate the suitability of this product for their application. Specifications are subject to change without notice. Tyco Electronics also reserves the right to make changes in materials or processing, which do not affect compliance with any specification, without notification to Buyer.   |   |  |  |
| <sup>1/</sup> COLORS AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-681. HOWEVER, DUE TO LENGTH LIMITATIONS OF THE RAYCHEM PART NUMBER, AN ALTERNATIVE COLOR CODE MAY REPLACE MIL-STD-681 COLOR CODE DESIGNATORS. (EXAMPLE: "901/902.." MAY BE REPLACED BY "Axxx".) OTHER CODES AND SUFFIXES MAY BE ADDED TO THE PART NUMBER AS NECESSARY, TO CAPTURE ANY ADDITIONAL REQUIREMENTS IMPOSED BY THE PURCHASE ORDER. |   |  |  |
| Page 1 of 1  | The TE logo, Tyco Electronics and Raychem are trademarks.   |  | <br>Raychem Wire & Cable<br>501 Oakside Avenue<br>Redwood City, CA 94063-3800<br>Phone: 1-800-227-8816<br>Fax: 1-650-361-6297 |
|  | DIMENSIONS ARE IN INCHES, AND UNLESS OTHERWISE DESIGNATED ARE NOMINAL   |  |  |
|  | THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID. |  |  |

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)