
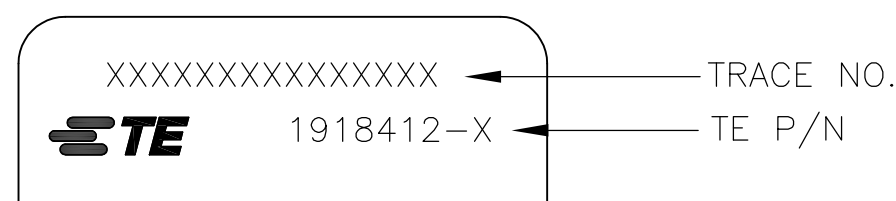


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	ECO-16-009990	06JUL16	KG	SM

1. MAXIMUM INSERTION LOSS IS 0.4dB AT 850nm.
2. SEE TRACE LABEL DETAIL.
3. PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TE SPEC TEC-138-702.

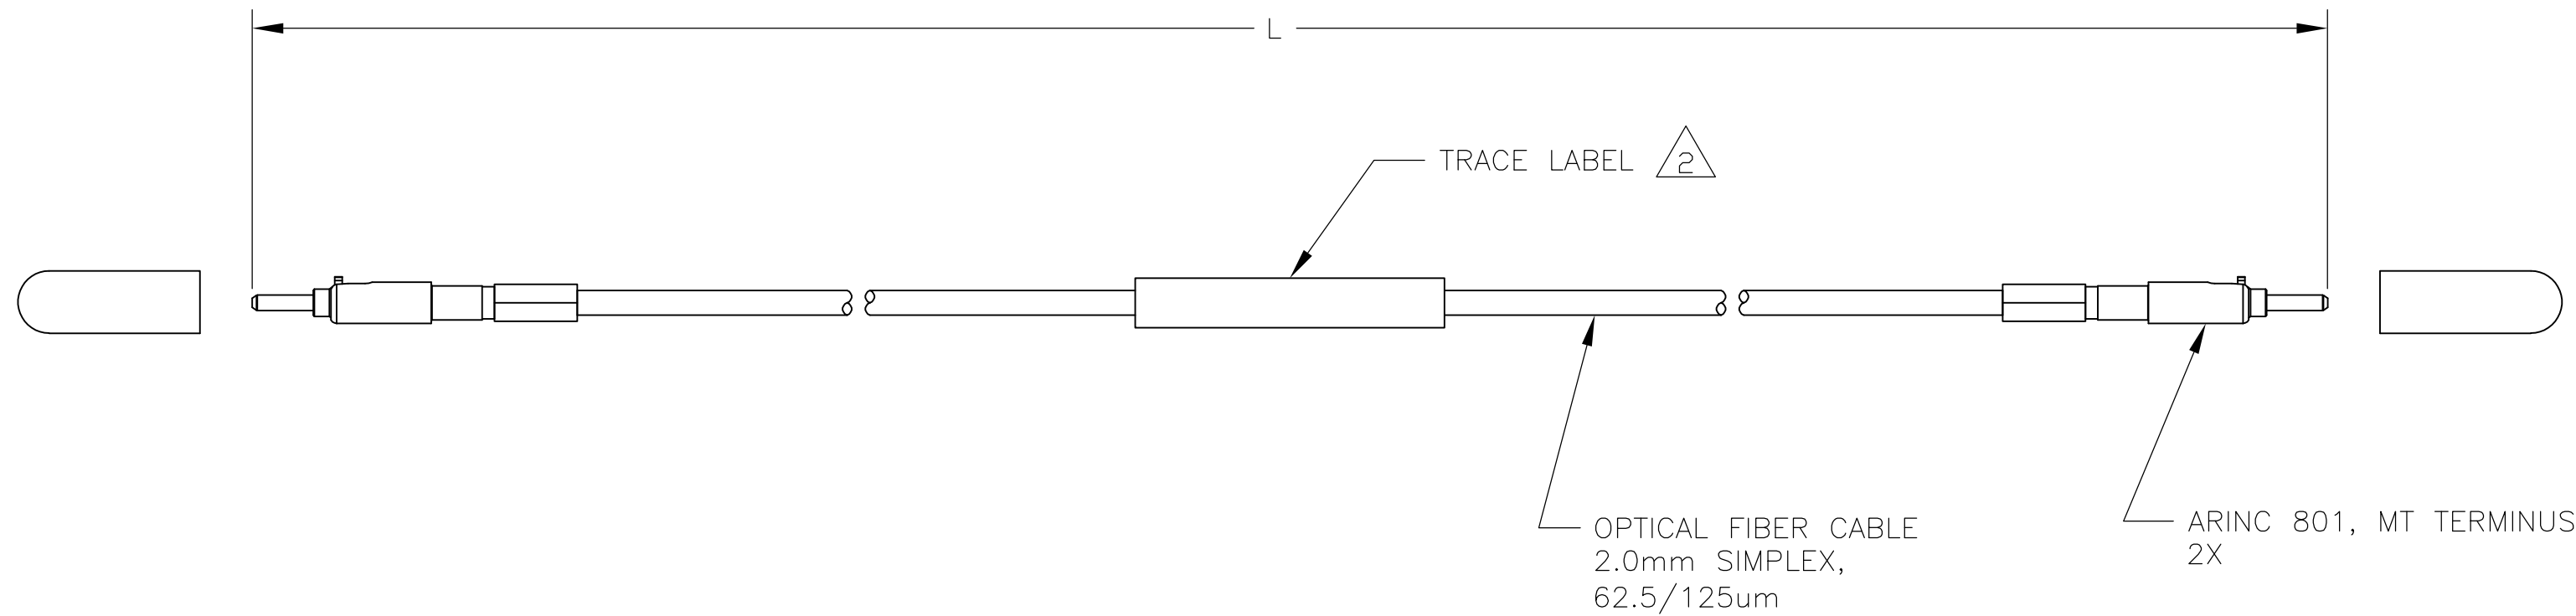

2 TRACE LABEL DETAIL  
 (NOT TO SCALE)

0.610±0.013 [24.0±0.5]	1918412-5
0.305±0.013 [12.0±0.5]	1918412-4
1.100+0.020/-0.0 [43.3+0.8/-0.0]	1918412-3
0.400+0.020/-0.0 [15.7+0.8/-0.0]	1918412-2
3.810±0.080 [150.0±3.1]	1918412-1
L METERS [INCHES]	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J.W.DAVIS 14MAR06	TE Connectivity																						
DIMENSIONS: METERS [INCHES]		CHK J.BARRY 14MAR06																							
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD J.BARRY 14MAR06	NAME CABLE ASSEMBLY, FO, 2.0mm SIMPLEX 62.5/125um CABLE ARINC 801 MT TO ARINC 801 MT																						
<table border="0"> <tr> <td>0 PLC</td> <td>±</td> <td>-</td> </tr> <tr> <td>1 PLC</td> <td>±</td> <td>-</td> </tr> <tr> <td>2 PLC</td> <td>±</td> <td>-</td> </tr> <tr> <td>3 PLC</td> <td>±</td> <td>-</td> </tr> <tr> <td>4 PLC</td> <td>±</td> <td>-</td> </tr> <tr> <td>ANGLES</td> <td>±</td> <td>-</td> </tr> <tr> <td>FINISH</td> <td></td> <td></td> </tr> </table>		0 PLC	±	-	1 PLC	±	-	2 PLC	±	-	3 PLC	±	-	4 PLC	±	-	ANGLES	±	-	FINISH			PRODUCT SPEC -	RESTRICTED TO -	
0 PLC	±	-																							
1 PLC	±	-																							
2 PLC	±	-																							
3 PLC	±	-																							
4 PLC	±	-																							
ANGLES	±	-																							
FINISH																									
MATERIAL -		APPLICATION SPEC -	SIZE A2	CAGE CODE 00779	DRAWING NO 1918412																				
		WEIGHT 0	SCALE NTS	SHEET 1 OF 1	REV A																				
CUSTOMER DRAWING																									

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)