



LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
GW	-	A	-	18APR2001	BL KM

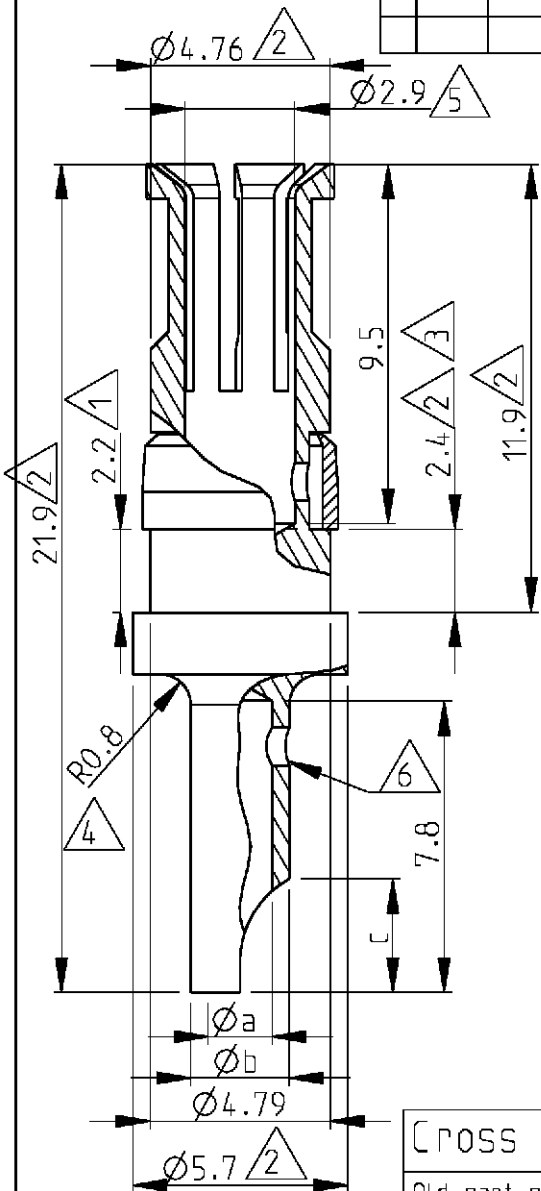

2:1

7) Application according to DIN 41612 type M female connectors and 2 µm Z-pack HM.

- △6 Only on 1-1393589-4
- △5 Initial dimension.
- △4 Not applicable on 1-1393589-6
- △3 Measured with spring moved towards the mating face
- △2 Max dimension
- △1 Min dimensions

Cross reference table

Old part number	Tyco part number	Current	Øa	Øb	dim c	Material	Plating
C42334-A347-A100	1-1393589-6	40 A	4.8	5.6	5.2	CuBe	Au or Pd in contact area
C42334-A347-A99	1-1393589-5	20 A	2.8	3.7	4	CuBe	Au or Pd in contact area
C42334-A347-A98	1-1393589-4	10 A	1.7	2.6	3	CuBe	Au or Pd in contact area

2000
 RELEASED FOR PUBLICATION
 THIS DRAWING IS UNPUBLISHED.
 COPYRIGHT 2000 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

DIMENSIONS: mm	DWN B. Lenvain	18APR2001	MATERIAL	-	FINISH	-
	CHR K. Mattheeuws	18APR2001	Tyco Electronics Oostkamp - Belgium			
TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD R. Leeman	18APR2001				
0 PLC ±	PRODUCT SPEC	-	NAME Pre-mating high-current socket with wire connection			
1 PLC ±	APPLICATION SPEC	-	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
2 PLC ±	WEIGHT	-	A4	00779	©=1-1393589-4	-
3 PLC ±	CUSTOMER DRAWING	-	SCALE	SHEET	OF	REV
4 PLC ±			5/1	1	1	A
ANGLES ±						

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)