
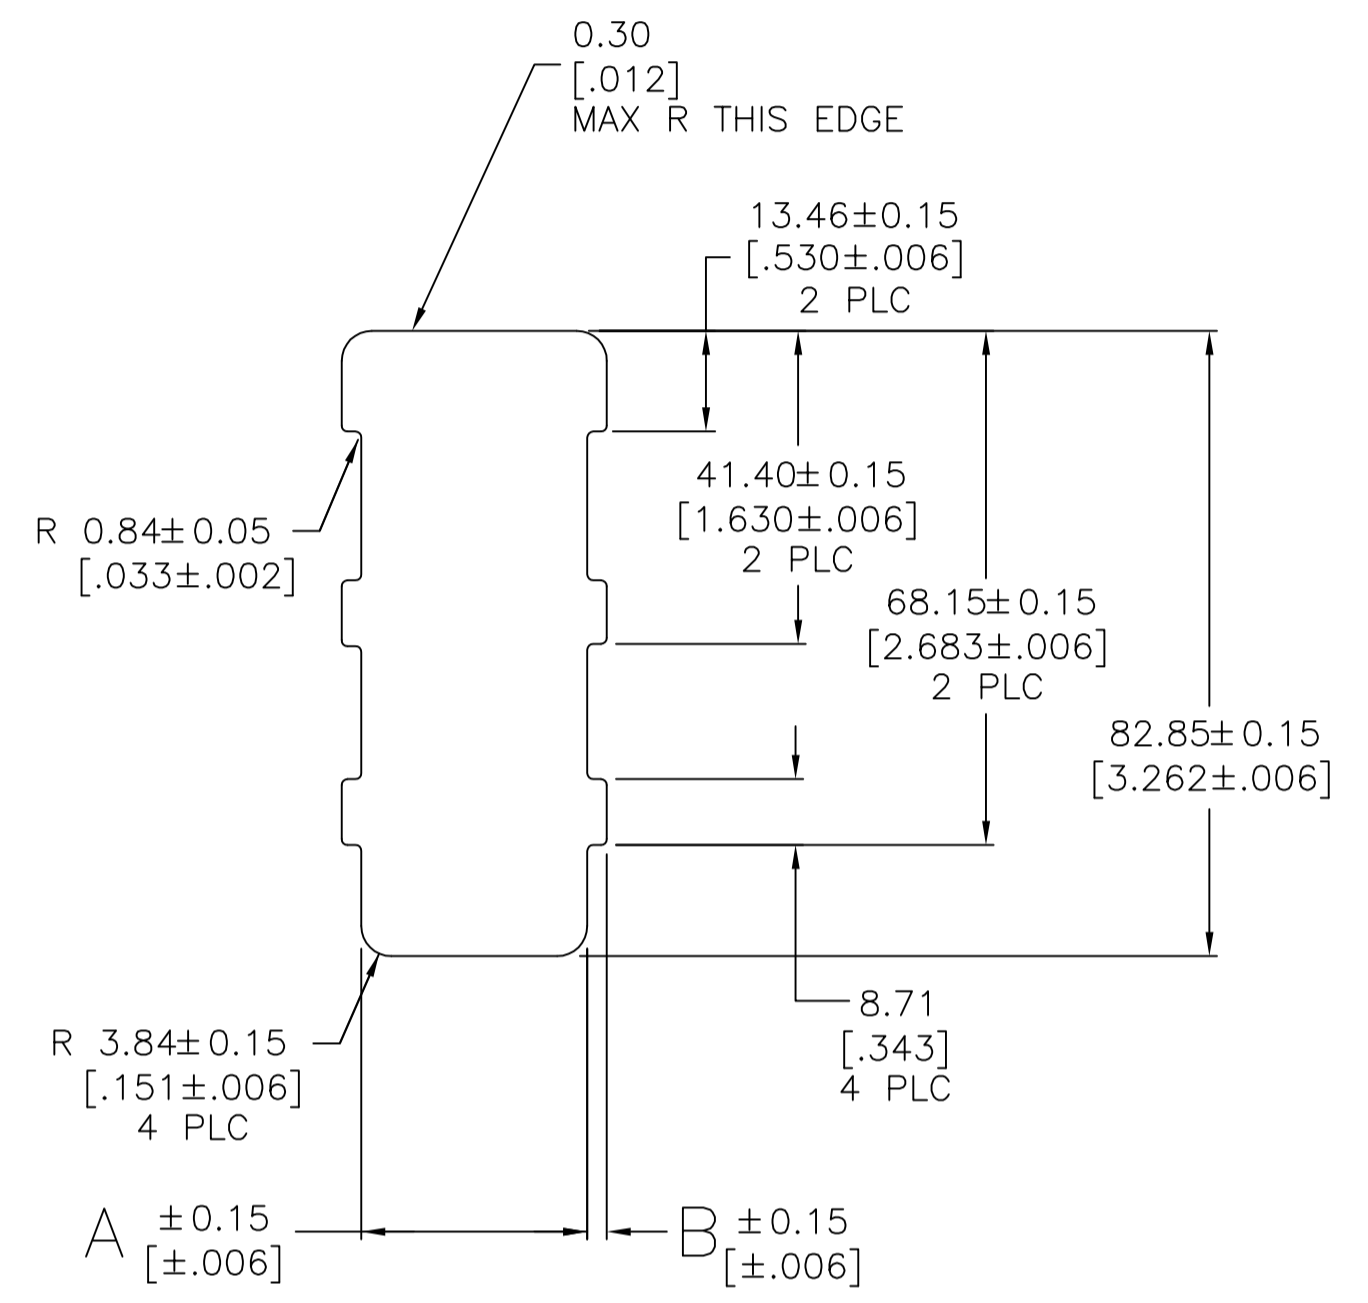
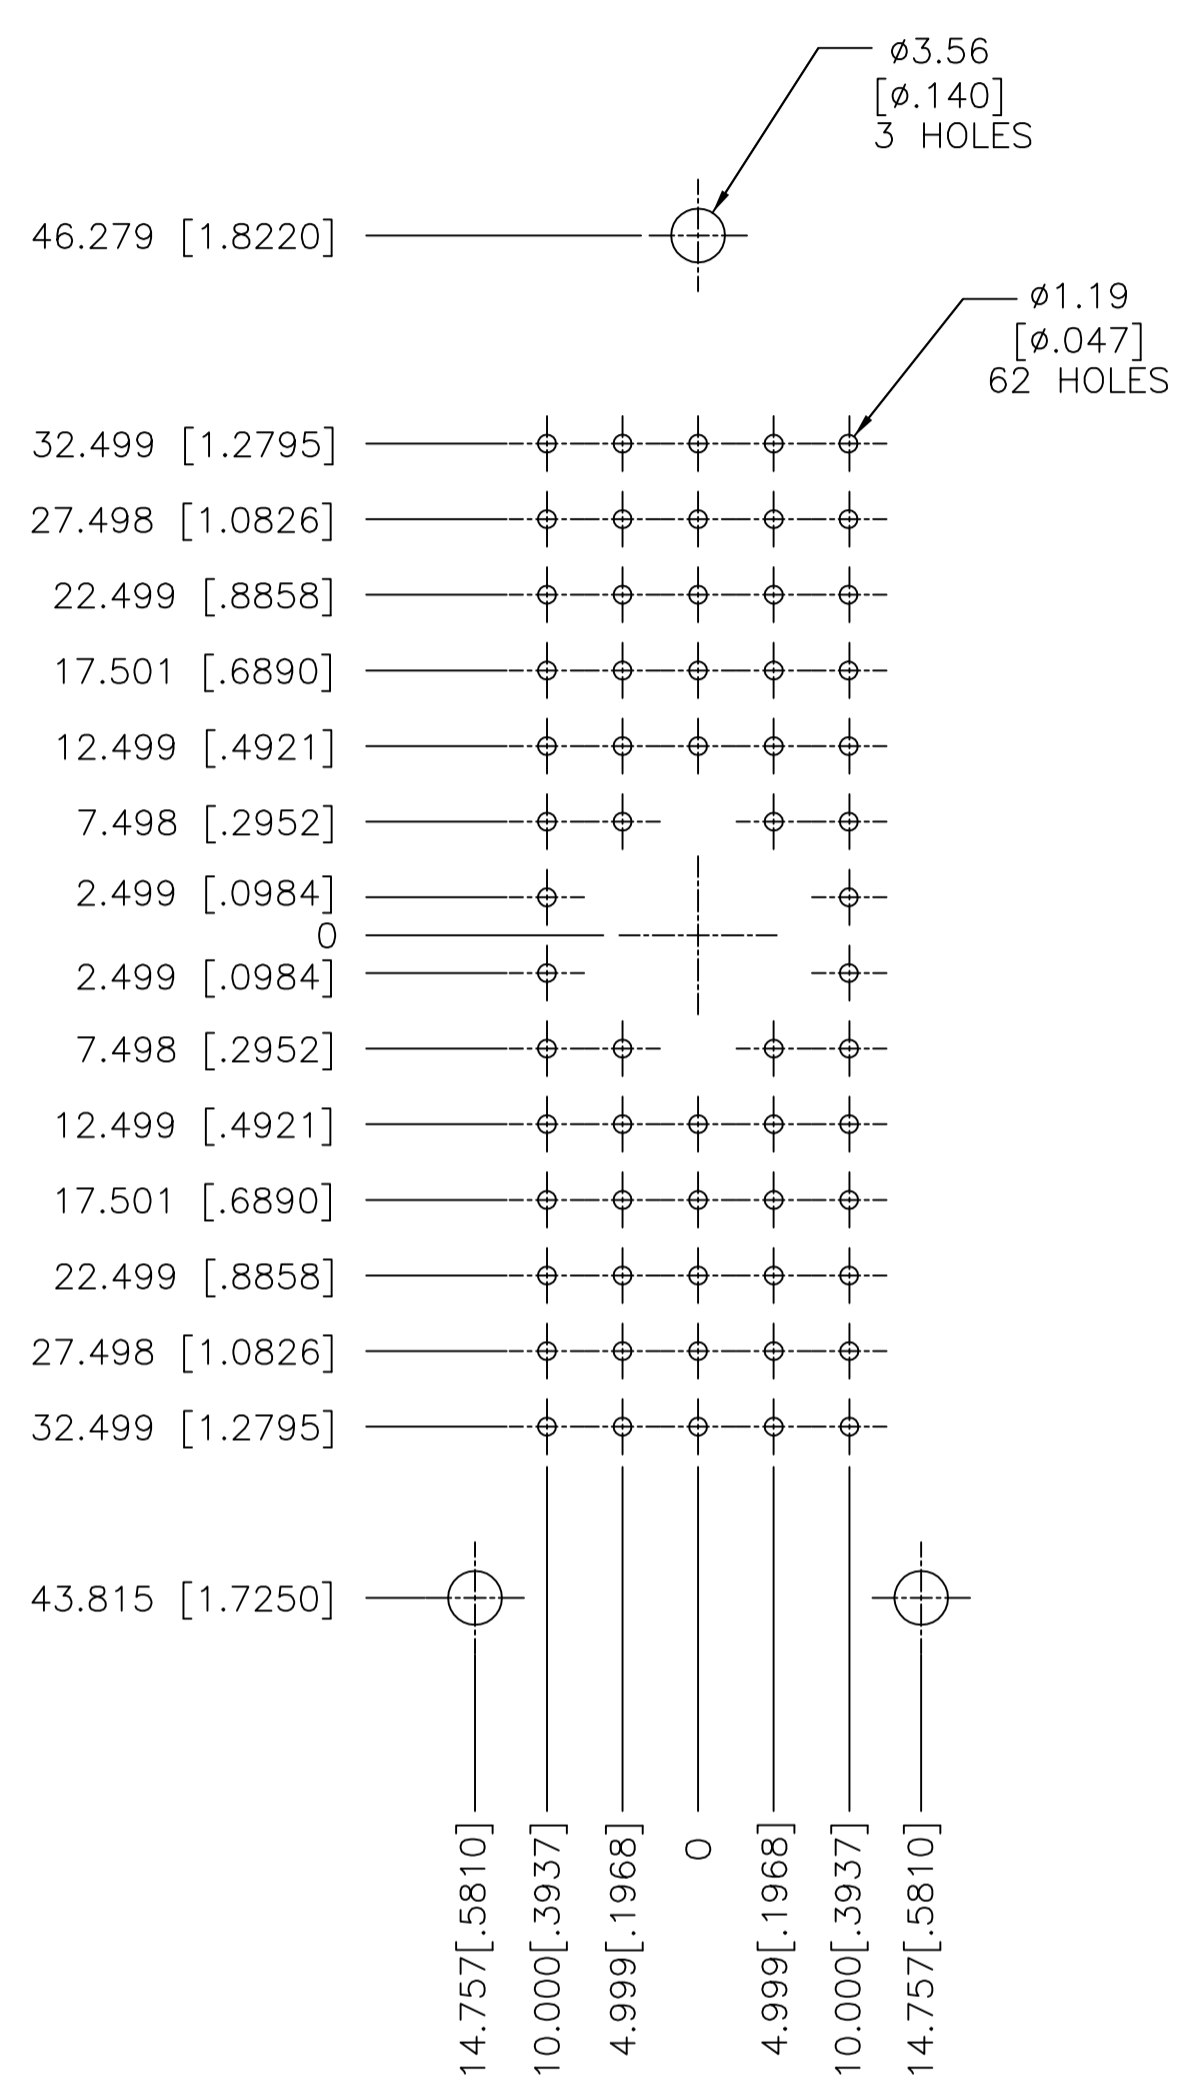
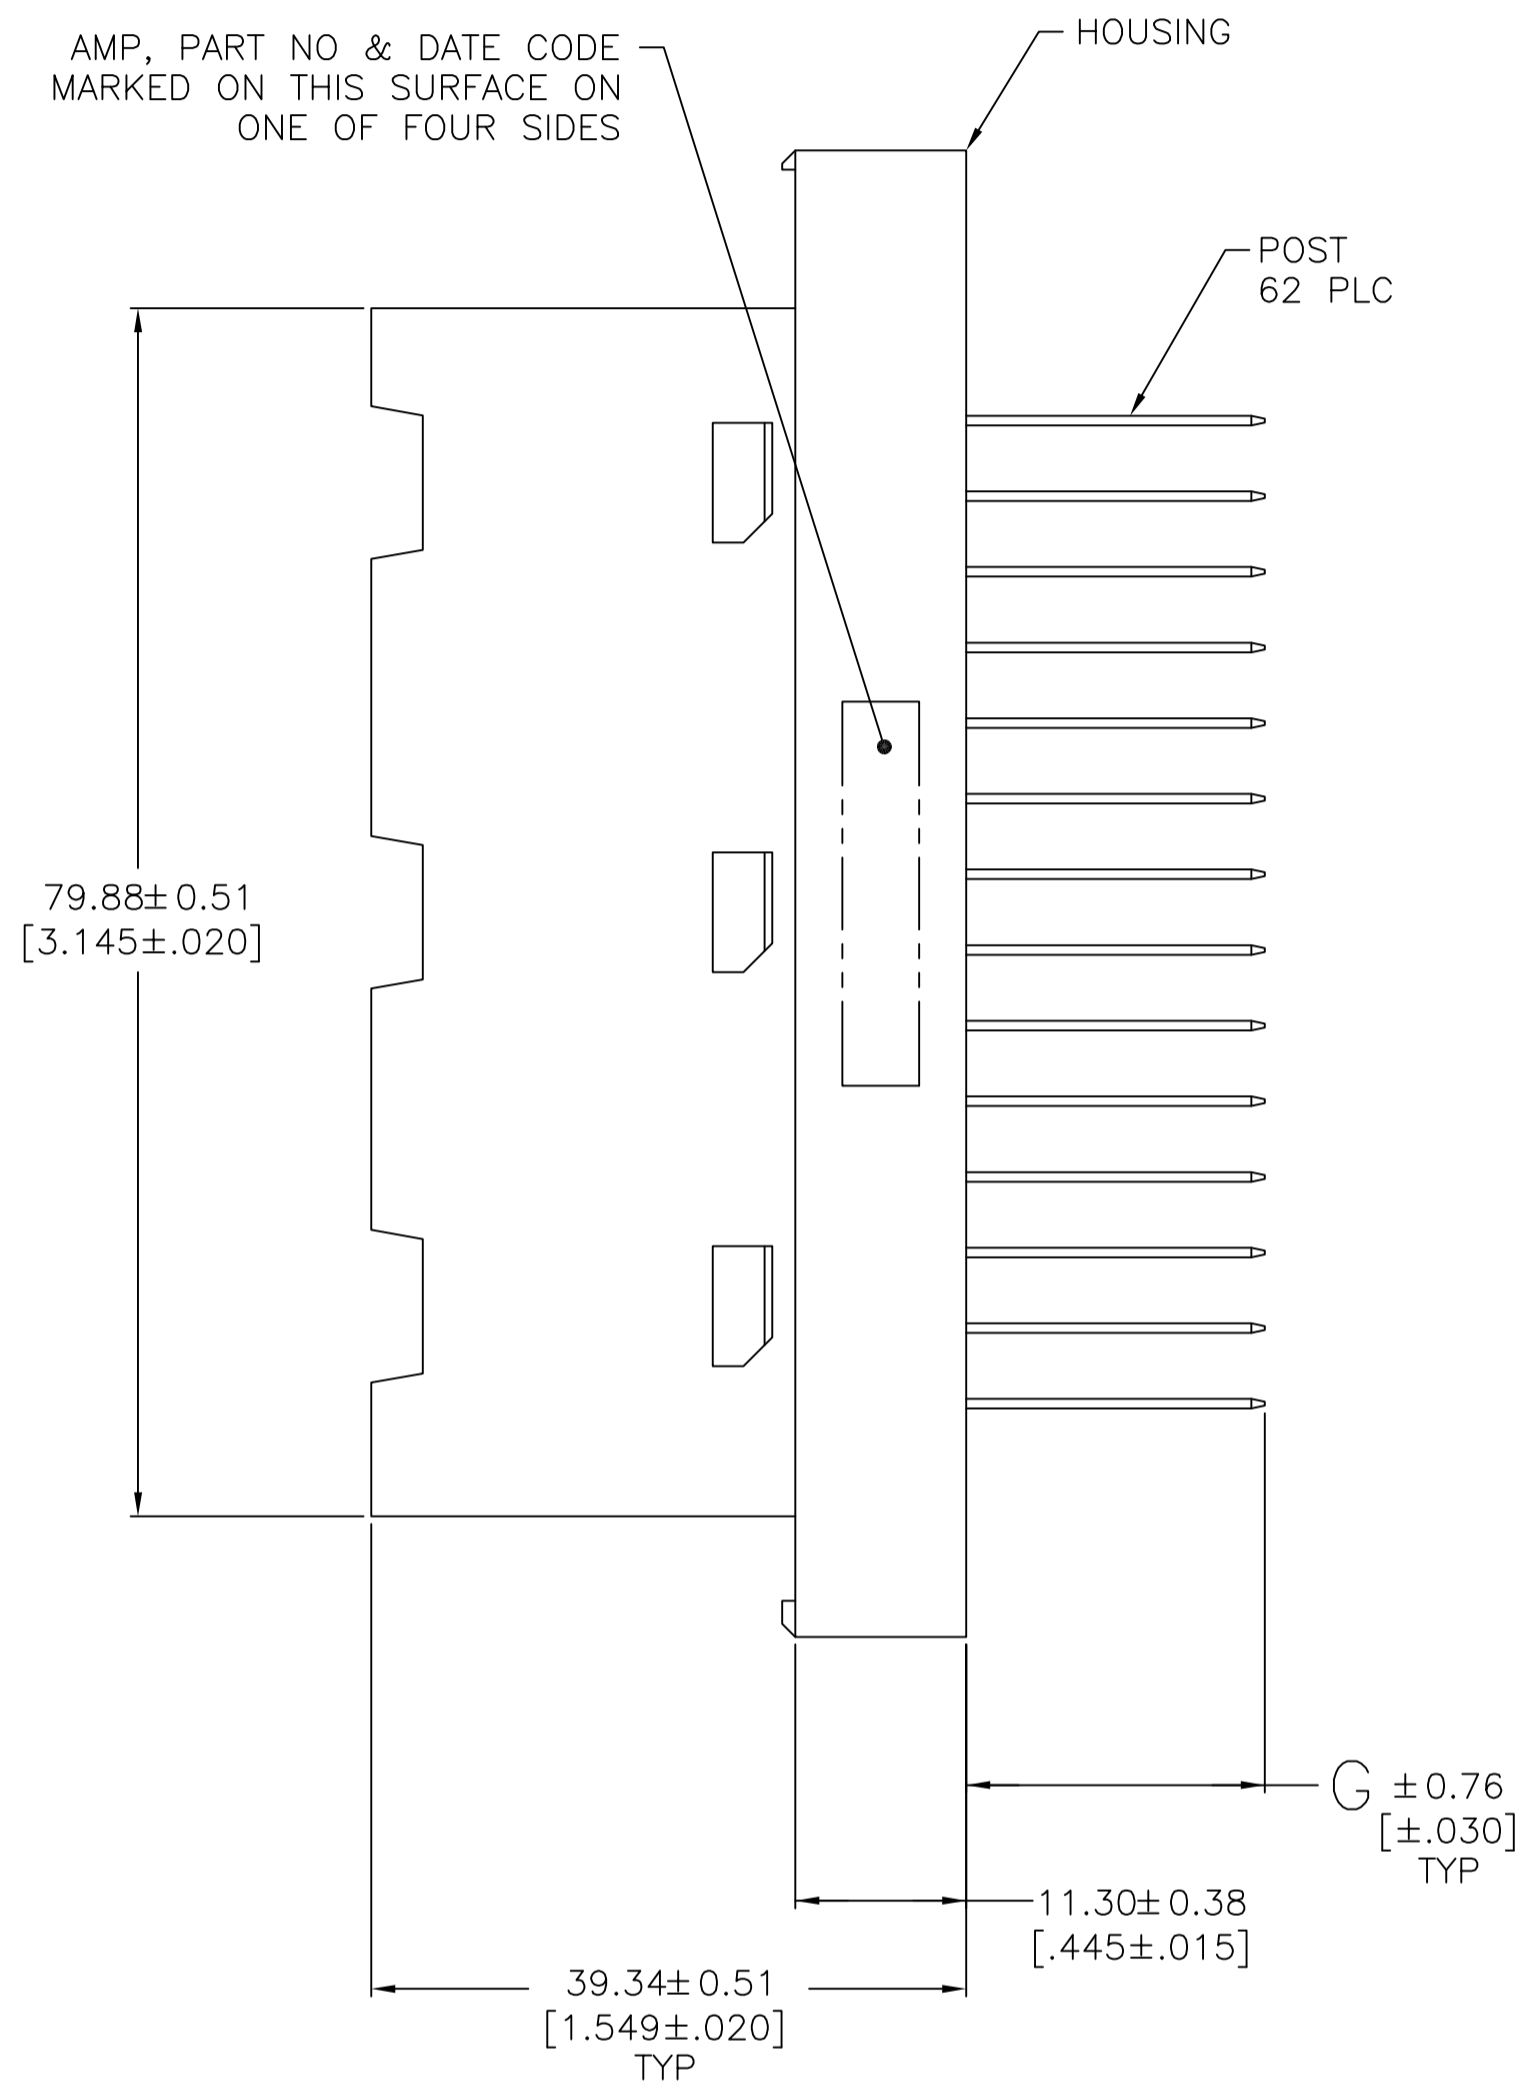


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
N4	REVISED PER	ECO-12-009700	23MAY12	KH	DR
P	REVISED PER	ECO-17-009310	28JUN2017	RS	MZ
R	REVISED PER	ECO-17-011181	05AUG2017	RS	MZ
S	REVISED PER	ECO-18-000439	19JAN2018	RS	MZ

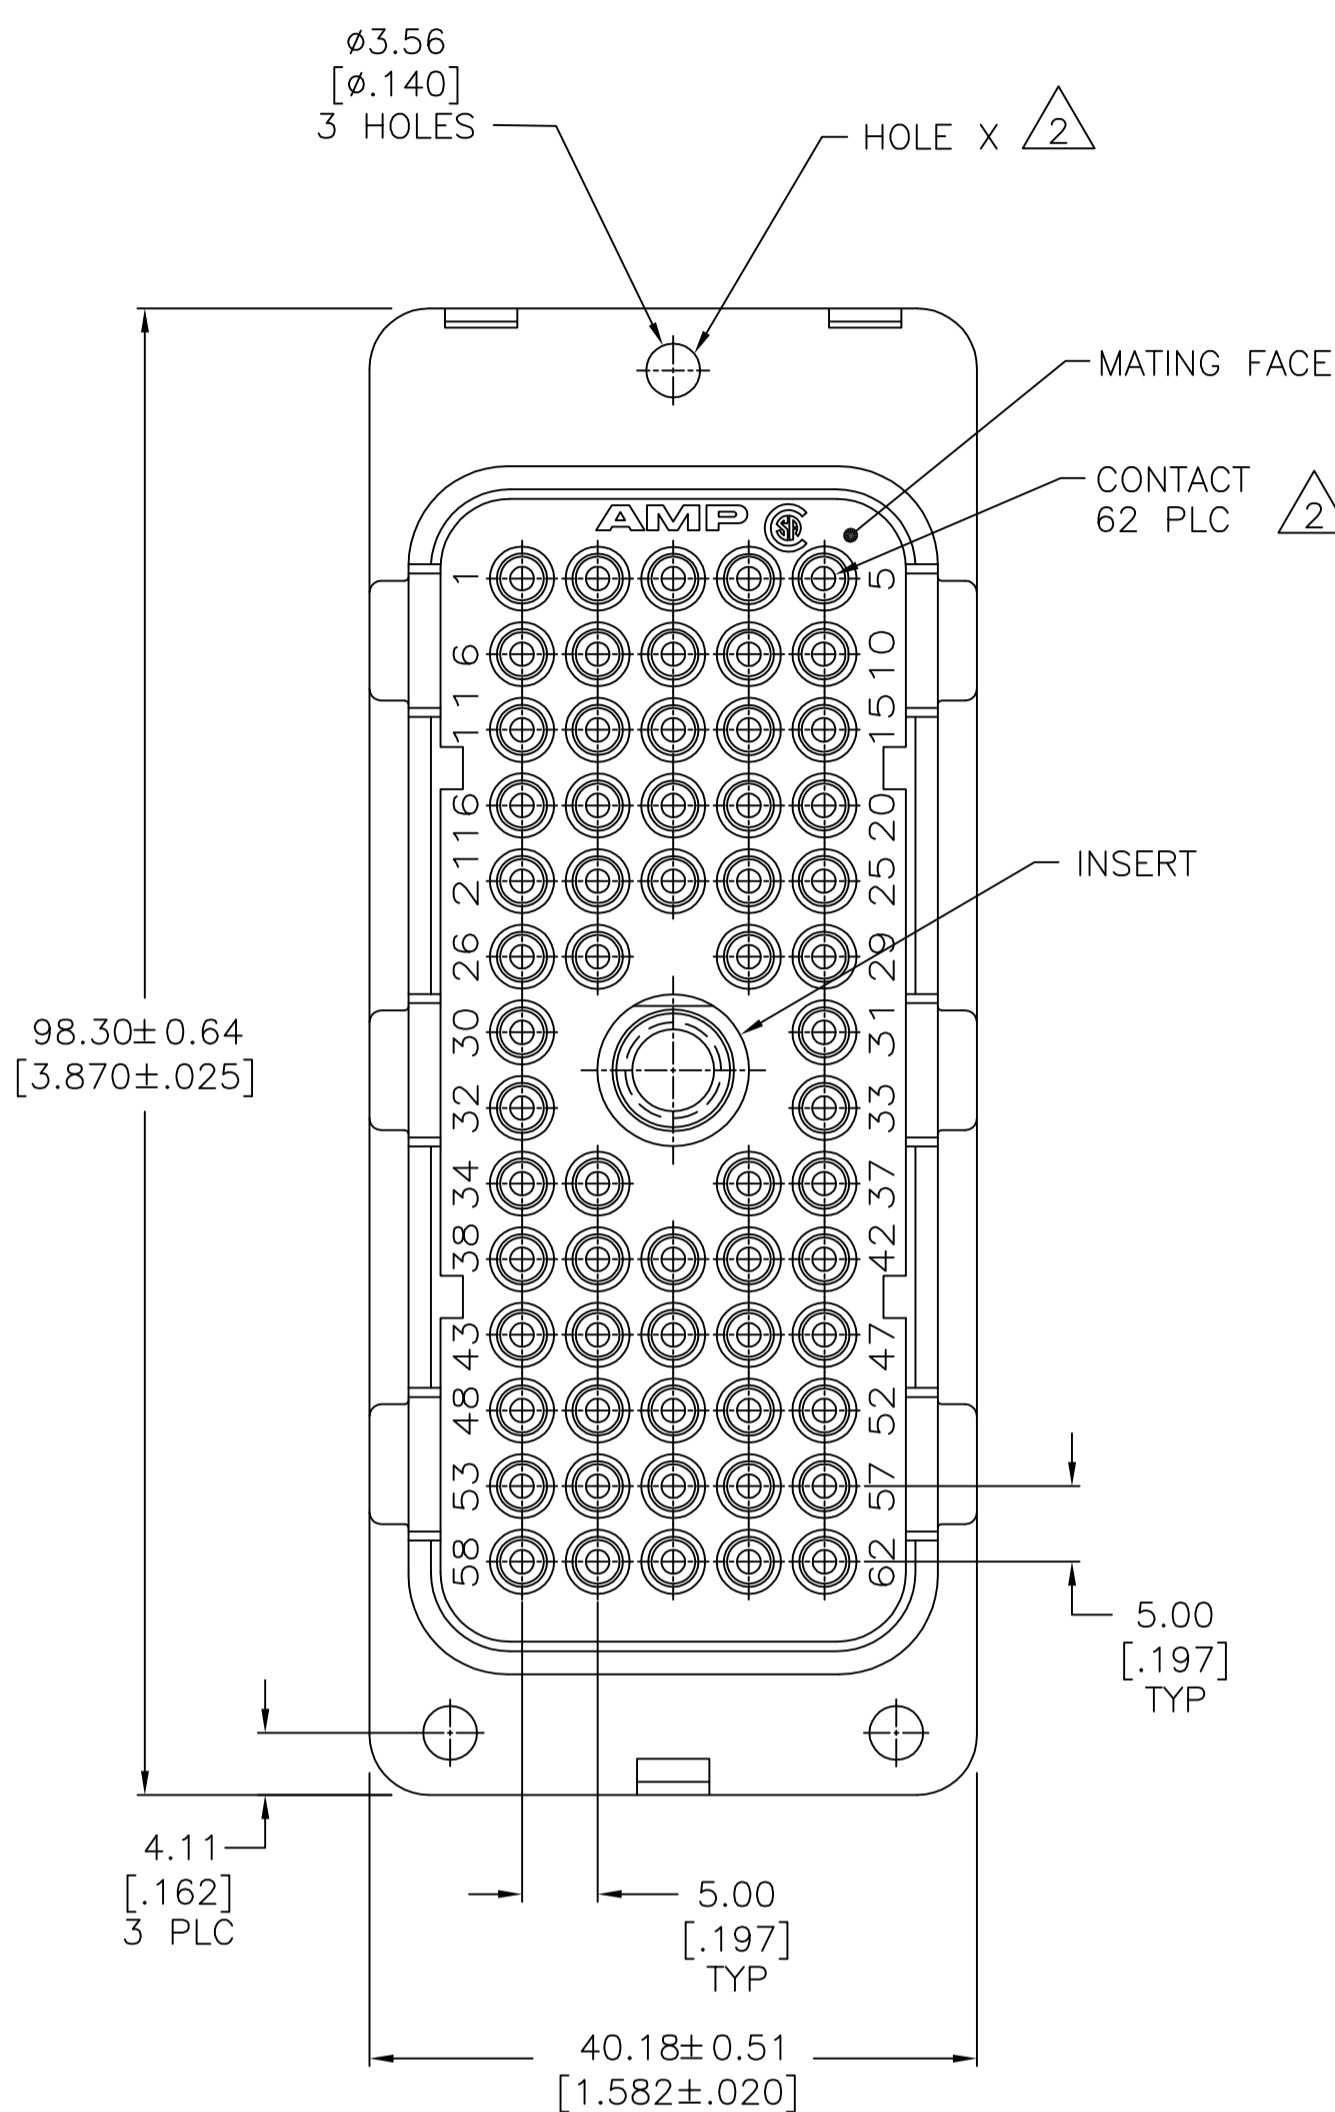

RECOMMENDED PANEL CUTOUT SCALE 1:1

RECOMMENDED PC BOARD LAYOUT

B	A	PANEL THICKNESS
1.75 [.069]	32.36 [1.274]	1.40-1.98 [.055-.078]
2.74 [.108]	30.05 [1.183]	0.79-1.40 [.031-.055]

- 1 PANEL CUTOUT FOR REAR MOUNTED PIN BLOCK.
- 2 SEAMS OF ALL PINS TO BE ORIENTED TOWARD HOLE X SIDE.
- 3 POLYESTER, BLACK.
- 4 0.76µm [.000030] MIN GOLD PER MIL-G-45204 FOR A LENGTH OF 6.35 [.250] MIN FROM MATING END, GOLD FLASH ON REMAINDER, BOTH OVER 1.27µm [.000050] MIN NICKEL PER QQ-N-290.
- 5 2.54µm [.000100] MIN TIN-LEAD PER MIL-T-10727 OVER 2.54µm [.000100] MIN COPPER PER MIL-C-14550.
- 6 2.54µm [.000100] MIN TIN PER MIL-T-10727 OVER 2.54µm [.000100] MIN COPPER PER MIL-C-14550.
- 7 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

OBSOLETE	5	4	5.59 [.220]	211580-6
	6	4	3.56 [.140]	211580-5
	6	4	19.76 [.778]	211580-4
OBSOLETE	5	4	3.56 [.140]	211580-3
OBSOLETE	5	4	19.76 [.778]	211580-2

THIS DRAWING IS A CONTROLLED DOCUMENT. DIN L/SIPE 09/09/92

CHK R.STONE 10-15-92

APVD -

NAME -

PRODUCT SPEC -

APPLICATION SPEC -

SIZE A1 CAGE CODE DRAWING NO 00779 ©=211580 RESTRICTED TO

WEIGHT -

CUSTOMER DRAWING SCALE 2:1 SHEET 1 OF 1 REV S

TE Connectivity Ltd.

CONNECTOR BLOCK FOR PINS WITH FEMALE JACKSCREW THREAD, 62 POSN, METRIMATE

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)