


- 1 MATES WITH AMP CONNECTOR PART NO. 480706.
- △2 FLAME RETARDANT CLASSIFICATION OF MATERIAL IS 94V-2.
- 3 PARTS MUST COMPLY WITH AMP SOLDERABILITY SPEC 109-11-3.
- △4 CONTACT IS STAMPED FROM PRE-PLATED STOCK WHICH IS PLATED OVERALL WITH 0.00127 [.000050] NICKEL, THEN STRIPED WITH 0.00076 [.000030] GOLD IN CONTACT AREA INDICATED AND TIN-LEAD ON SOLDER TAIL END.
- △5 CONTACT IS PLATED OVERALL WITH 0.00127 [.000050] NICKEL, THEN 0.00076 [.000030] GOLD OVER CONTACT LENGTH INDICATED AND MATTE TIN ON SOLDER TAIL END.
- △6 SUPERSEDED BY 350990-5

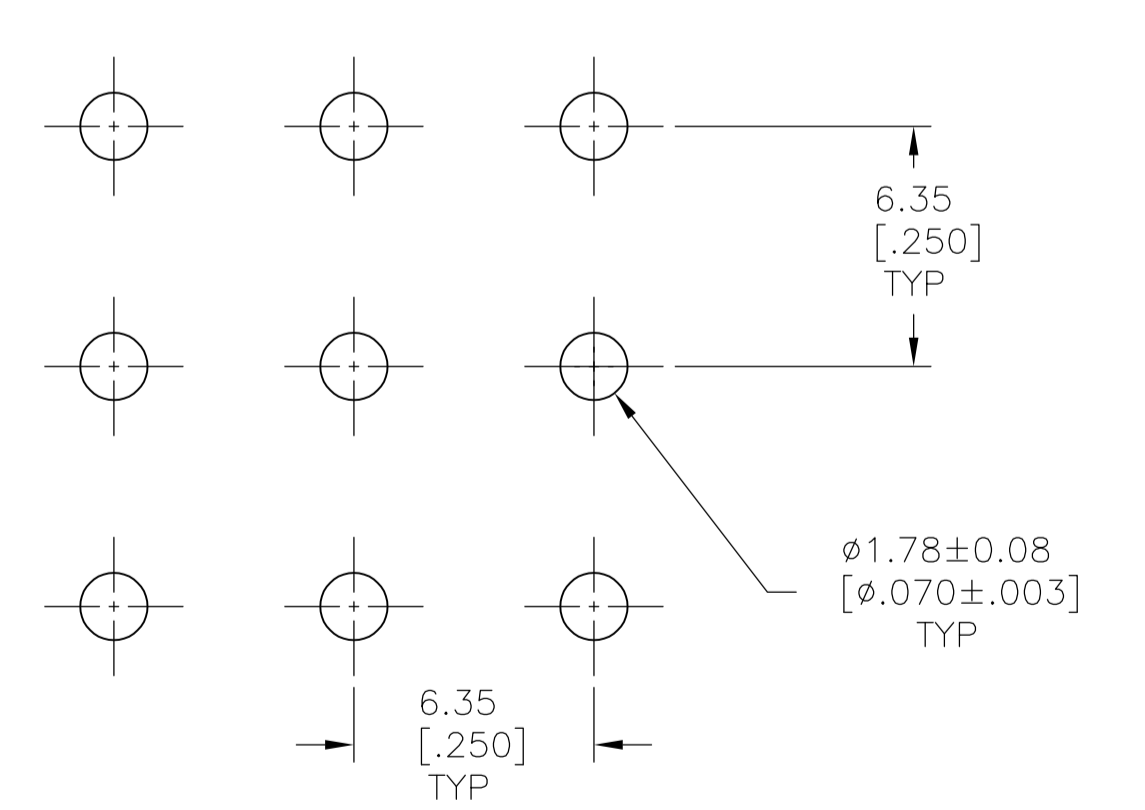

RECOMMENDED LAYOUT FOR 3.18 [.125] THICK PC BOARD

PH BRZ GOLD △5	NYLON, NATURAL △2	350990-5
PH BRZ TIN	NYLON, NATURAL △2	350990-4
△6 PH BRZ GOLD △4	NYLON, NATURAL △2	350990-3
CONTACT	HOUSING	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN K. WHITAKER 11OCT2005		TE Connectivity	
DIMENSIONS: mm [INCHES]		CHK S. RIDGILL 11OCT2005			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD S. RIDGILL 11OCT2005		NAME	
0 PLC ±		PRODUCT SPEC		SOCKET HEADER ASSEMBLY	
1 PLC ±		APPLICATION SPEC		9 CIRCUIT, LONG TAIL,	
2 PLC ±		WEIGHT		UNIVERSAL MATE-N-LOK (TM)	
3 PLC ± 0.13 [.005]		SIZE		A1 00779 C=350990	
4 PLC ±		SCALE		5:1	
ANGLES ±		SHEET		1 OF 1	
MATERIAL SEE TABLE		FINISH SEE TABLE		REV G2	
CUSTOMER DRAWING		SCALE 5:1		SHEET 1 OF 1	

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)