


REVISIONS				
P	LTR	DESCRIPTION	DATE	APVD
	D1	ECR-20-004655	06OCT20	RK SBH

- NOTE:
- PACKAGING ACC. TO TE SPEC.107-18032  
BUNDLE EVERY 25 ASSEMBLIES WITH A RUBBER BAND
  - ELECTRICAL TEST CONTAINING "SHORT CIRCUIT TEST, CONTINUITY AND ACCURATE CAVITY ASSIGNMENT TEST" ACC. TO TE-SPEC.108-18857, SUBSECTION 3.1.1
  - ASSEMBLY COLOR: WHITE
- △ KEYING HV-2 AND HV-4 AS SHOWN

△	
PN	KEYING
1--X	HV-4
2--X	LV-2

PN	L	TOLERANCES/mm
X-2083074-1	610mm (2ft)	+/- 5
X-2083074-2	1270mm (4ft)	+/- 15
X-2083074-3	1880mm (6ft)	+/- 20
X-2083074-4	2490mm (8ft)	+/- 20
X-2083074-5	3100mm (10ft)	+/- 30
X-2083074-6	3660mm (12ft)	+/- 30
X-2083074-7	4270mm (14ft)	+/- 50
X-2083074-8	4880mm (16ft)	+/- 50

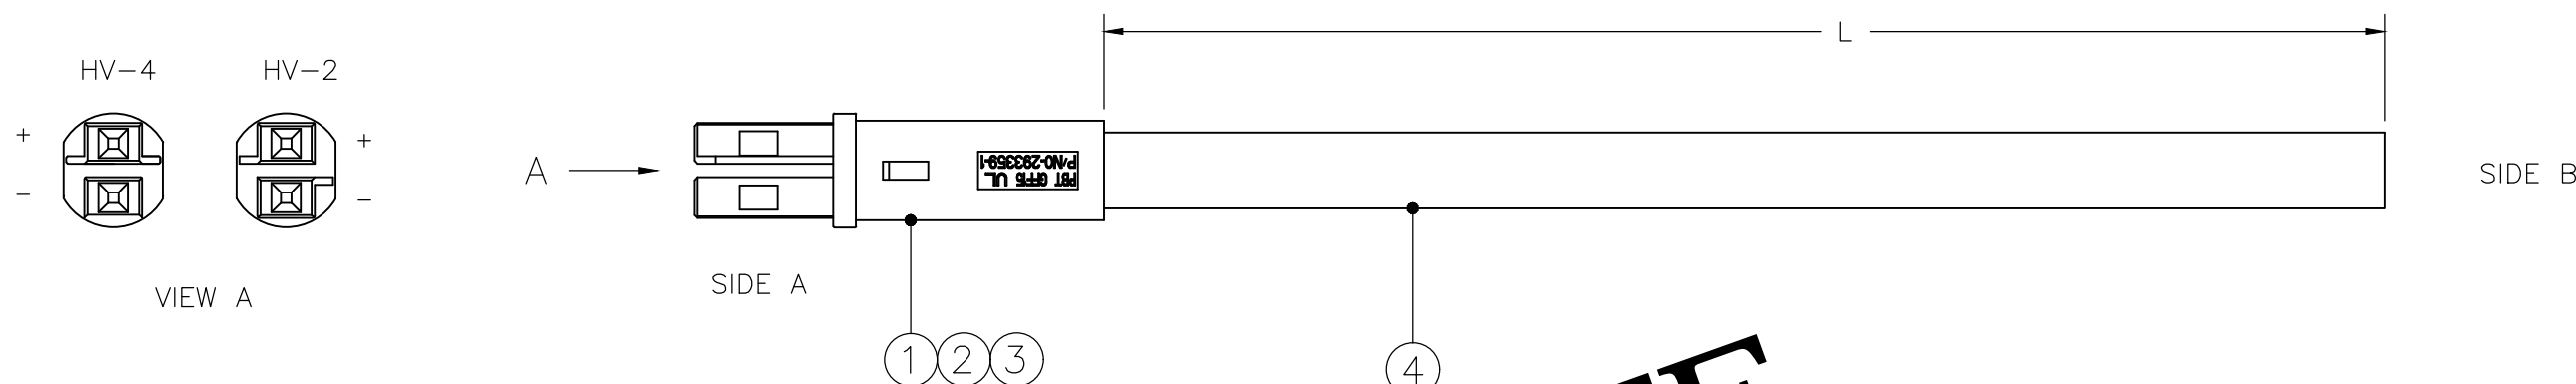

**OBSOLETE**

UOM	QTY	QTY	DESCRIPTION	POS.
PC	AR	AR	Cable SVT 2xAWG18 UL WH	4
PC	2	2	MICRO QUADLOK SYSTEM SOCKET CONTACT	3
PC	1	1	TUBE FOR SVT CABLE	2
PC	-	1	PLUG MINI HVL HV-4	1
PC	1	-	PLUG MINI HVL HV-2	
	2--X	1--X		

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN SATHISH KUMAR.G 01APR11	<b>STE</b> TE Connectivity	
DIMENSIONS: mm		CHK R.HOSSAINI 04APR11		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD R.HOSSAINI 04APR11	NAME CABLE ASSEMBLY NECTOR S LINE 2POS. HV-2 AND HV-4	
0 PLC ± -		PRODUCT SPEC	SIZE	
1 PLC ± -		APPLICATION SPEC	CAGE CODE	DRAWING NO
2 PLC ± -		WEIGHT	A3	00779
3 PLC ± -		MATERIAL	G-2083074	
4 PLC ± -		FINISH	RESTRICTED TO	
ANGLES ± -			SCALE	
			NTS	
			SHEET	
			1 OF 1	
			REV	
			D1	

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)