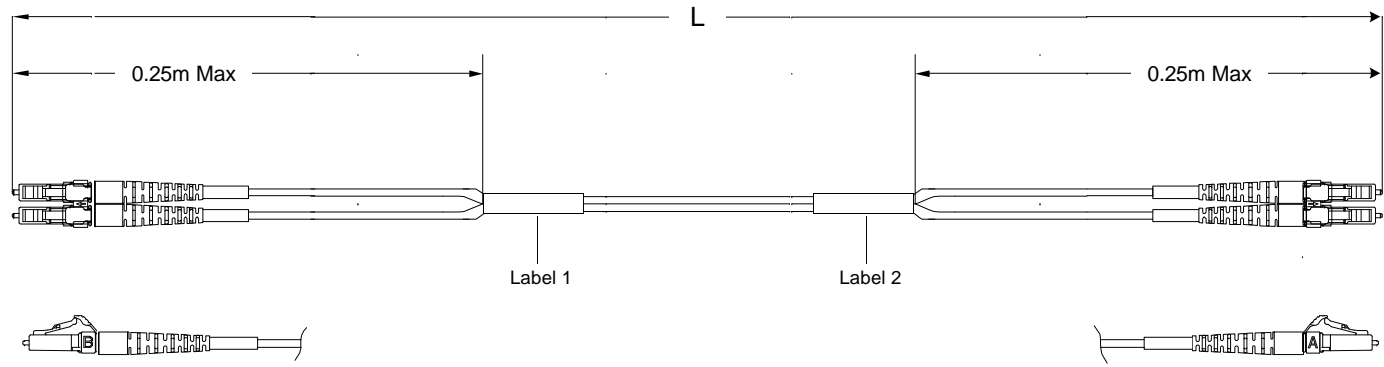


THIS DRAWING IS A CONTROLLED DOCUMENT. 0190620

USED ON



Left Side
 Connector(s): LC-Duplex Secure
 Mode: MM
 Housing Color: Aqua
 Geom. Spec: N/A

Fiber Path
 A - _____ - B
 B - _____ - A

Right Side
 Connector(s): LC-Duplex
 Mode: MM
 Housing Color: Beige
 Geom. Spec: N/A

- Notes:
- 1 Product and Processing must meet requirements of Tyco Electronics Standard 230-702
 - 2 Includes dust caps (not shown on print).
 - 3 IL tested at 1300nm.
 - 4 Label 2 will not be present on any cable assembly less than 5 meters long.

THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO TYCO ELECTRONICS. IT MAY NOT BE DISCLOSED TO ANYONE OTHER THAN TYCO ELECTRONICS PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM TYCO ELECTRONICS CORPORATION, HARRISBURG, PENNSYLVANIA

LOC	
CE	
DIST	16

A	Rev Per EC#	RELEASE	5/15/2007	-	DF		
P	LTR	REVISION RECORD	DATE	DN	APVD		

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
meters	
⊕	0 PLC ± .
⊖	1 PLC ± .
⊗	2 PLC ± .
⊙	3 PLC ± .
⊘	4 PLC ± .

Restricted To:

DIN	Cable Assy Configurator	MATERIAL		HEAT TREAT	
CHK	Dave Fennell	Tyco Electronics, Inc. Harrisburg, PA 17105-3608			
APVD	Dave Fennell				
NAME	FO C/A - 2 fiber, 50/125, OFNR (Riser) jacket, LC-Duplex Secure to LC-Duplex				
SCALE	NTS	SIZE	A2	DRAWING NO	C- 1906020
SHEET	1 of 4	REV	A		

CAC Customer Layout Rev: D



USED ON


Part #	L (meters)	L (feet)	LC-Duplex Secure, Aqua		LC-Duplex, Beige	
			IL (dB)	RL (dB)	IL (dB)	RL (dB)
4-1906020-3	42.570 - 43.430	139.66 - 142.48	0.56	-	0.56	-
4-1906020-4	43.560 - 44.440	142.91 - 145.80	0.57	-	0.57	-
4-1906020-5	44.550 - 45.450	146.16 - 149.11	0.57	-	0.57	-
4-1906020-6	45.540 - 46.460	149.40 - 152.42	0.57	-	0.57	-
4-1906020-7	46.530 - 47.470	152.65 - 155.74	0.57	-	0.57	-
4-1906020-8	47.520 - 48.480	155.90 - 159.05	0.57	-	0.57	-
4-1906020-9	48.510 - 49.490	159.15 - 162.36	0.57	-	0.57	-
5-1906020-0	49.500 - 50.500	162.40 - 165.68	0.58	-	0.58	-
5-1906020-1	50.490 - 51.510	165.64 - 168.99	0.58	-	0.58	-
5-1906020-2	51.480 - 52.520	168.89 - 172.30	0.58	-	0.58	-
5-1906020-3	52.470 - 53.530	172.14 - 175.62	0.58	-	0.58	-
5-1906020-4	53.460 - 54.540	175.39 - 178.93	0.58	-	0.58	-
5-1906020-5	54.450 - 55.550	178.64 - 182.25	0.58	-	0.58	-
5-1906020-6	55.440 - 56.560	181.88 - 185.56	0.58	-	0.58	-
5-1906020-7	56.430 - 57.570	185.13 - 188.87	0.59	-	0.59	-
5-1906020-8	57.420 - 58.580	188.38 - 192.19	0.59	-	0.59	-
5-1906020-9	58.410 - 59.590	191.63 - 195.50	0.59	-	0.59	-
6-1906020-0	59.400 - 60.600	194.88 - 198.81	0.59	-	0.59	-
6-1906020-1	60.390 - 61.610	198.12 - 202.13	0.59	-	0.59	-
6-1906020-2	61.380 - 62.620	201.37 - 205.44	0.59	-	0.59	-
6-1906020-3	62.370 - 63.630	204.62 - 208.75	0.59	-	0.59	-
6-1906020-4	63.360 - 64.640	207.87 - 212.07	0.6	-	0.6	-
6-1906020-5	64.350 - 65.650	211.12 - 215.38	0.6	-	0.6	-
6-1906020-6	65.340 - 66.660	214.37 - 218.70	0.6	-	0.6	-
6-1906020-7	66.330 - 67.670	217.61 - 222.01	0.6	-	0.6	-
6-1906020-8	67.320 - 68.680	220.86 - 225.32	0.6	-	0.6	-
6-1906020-9	68.310 - 69.690	224.11 - 228.64	0.6	-	0.6	-
7-1906020-0	69.300 - 70.700	227.36 - 231.95	0.61	-	0.61	-
7-1906020-1	70.290 - 71.710	230.61 - 235.26	0.61	-	0.61	-
7-1906020-2	71.280 - 72.720	233.85 - 238.58	0.61	-	0.61	-
7-1906020-3	72.270 - 73.730	237.10 - 241.89	0.61	-	0.61	-
7-1906020-4	73.260 - 74.740	240.35 - 245.20	0.61	-	0.61	-
7-1906020-5	74.250 - 75.750	243.60 - 248.52	0.61	-	0.61	-
7-1906020-6	75.240 - 76.760	246.85 - 251.83	0.61	-	0.61	-
7-1906020-7	76.230 - 77.770	250.09 - 255.15	0.62	-	0.62	-
7-1906020-8	77.220 - 78.780	253.34 - 258.46	0.62	-	0.62	-
7-1906020-9	78.210 - 79.790	256.59 - 261.77	0.62	-	0.62	-
8-1906020-0	79.200 - 80.800	259.84 - 265.09	0.62	-	0.62	-

THIS DRAWING IS A CONTROLLED DOCUMENT.

THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO TYCO ELECTRONICS CORPORATION. IT IS NOT TO BE DISCLOSED TO ANY OTHERS WITHOUT THE WRITTEN AUTHORIZATION OF TYCO ELECTRONICS CORPORATION, HARRISBURG, PENNSYLVANIA.


LOC
 CE
 DIST
 16

A	Rev Per EC#	RELEASE	5/15/2007	-	DF	APVD	
P	LTR	REVISION RECORD	DATE	DN	APVD		

DIMENSIONS: meters


TOLERANCES UNLESS OTHERWISE SPECIFIED:
 9 PLC ± .
 1 PLC ± .
 2 PLC ± .
 3 PLC ± .
 4 PLC ± .

Restricted To:

DIN	Cable Assy Configurator	MATERIAL	-	HEAT TREAT	-
CHK	Dave Fennell	 Tyco Electronics, Inc. Harrisburg, PA 17105-3608			
APVD	Dave Fennell	NAME			
FO C/A - 2 fiber, 50/125, OFNR (Riser) jacket, LC-Duplex Secure to LC-Duplex					
SCALE	SIZE	DRAWING NO	SHEET	REV	
NTS	A2	C- 1906020	3 of 4	A	

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)