


COIL: @ +25 °C	
RESISTANCE	600 OHMS ± 10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	13.4 VDC
MUST RELEASE	1.5 VDC

ENVIRONMENT:	
VIBRATION	10 CPS TO 2000 CPS @ 20 g's
SHOCK	100 g's 6 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C

NOTES:	OPERATE 4 MS MAX.
	RELEASE 3 MS MAX.
	CONTACT BOUNCE 3 MS MAX.

CUSTOMER DATA SHEET

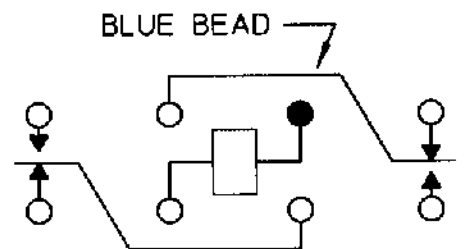

CONTACT RATING:	4 AMPS 30 VDC
	1 AMP 115 VAC 400 HZ
	100,000 OPERATIONS MIN.

DR. R.B. 1/6/95 CK. 10/5750MB



CUST. HI-G
CUST. NO. 2HA-2A-126

TYPE "HFW" RELAY

HFW4A1201S01

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)