

4  
DRAWING MADE IN THIRD ANGLE PROJECTION

3


2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION .19  
 © COPYRIGHT 19 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

PROJ	LOC	DIST	P	F	ZONE	LTR	DESCRIPTION	DATE	APPD
4092	DF	SO					RDWN & ADD -16 PER DF-3764 CT	8/24/90	<i>Raw Eaby</i>

PART NO.	A DIM	B DIM	C DIM	SK TUBING COLOR	
859474-1	38.00 [965.2]	.38 [9.7]	38.00 [965.2]	BLACK	OBSOLETE
859474-2	48.00 [1219.2]	.38 [9.7]	48.00 [1219.2]	BLACK	OBSOLETE
859474-3	40.00 [1016.0]	-	36.62 [930.1]	BROWN	
859474-4	40.00 [1016.0]	-	36.62 [930.1]	YELLOW	
859474-5	42.00 [1066.8]	-	36.62 [930.1]	GREEN	
859474-6	40.00 [1016.0]	-	33.62 [853.9]	BROWN	
859474-7	40.00 [1016.0]	-	33.62 [853.9]	YELLOW	
859474-8	42.00 [1066.8]	-	33.62 [853.9]	GREEN	
859474-9	46.75 [1187.4]	.50 [12.7]	37.75 [958.8]	YELLOW	OBSOLETE
1-859474-0	46.75 [1187.4]	.50 [12.7]	37.75 [958.8]	GREEN	OBSOLETE
1-859474-1	46.75 [1187.4]	.50 [12.7]	37.75 [958.8]	BROWN	OBSOLETE
1-859474-2	40.00 [1016.0]	.38 [9.7]	33.62 [853.9]	BLUE	OBSOLETE
1-859474-3	42.00 [1066.8]	-	33.62 [853.9]	RED	OBSOLETE
1-859474-4	40.00 [1016.0]	-	33.62 [853.9]	WHITE	OBSOLETE
1-859474-5	54.00 [1371.6]	-	45.62 [1158.7]	GREEN	
1-859474-6	48.00 [1219.2]	-	40.00 [1016.0]	YELLOW	

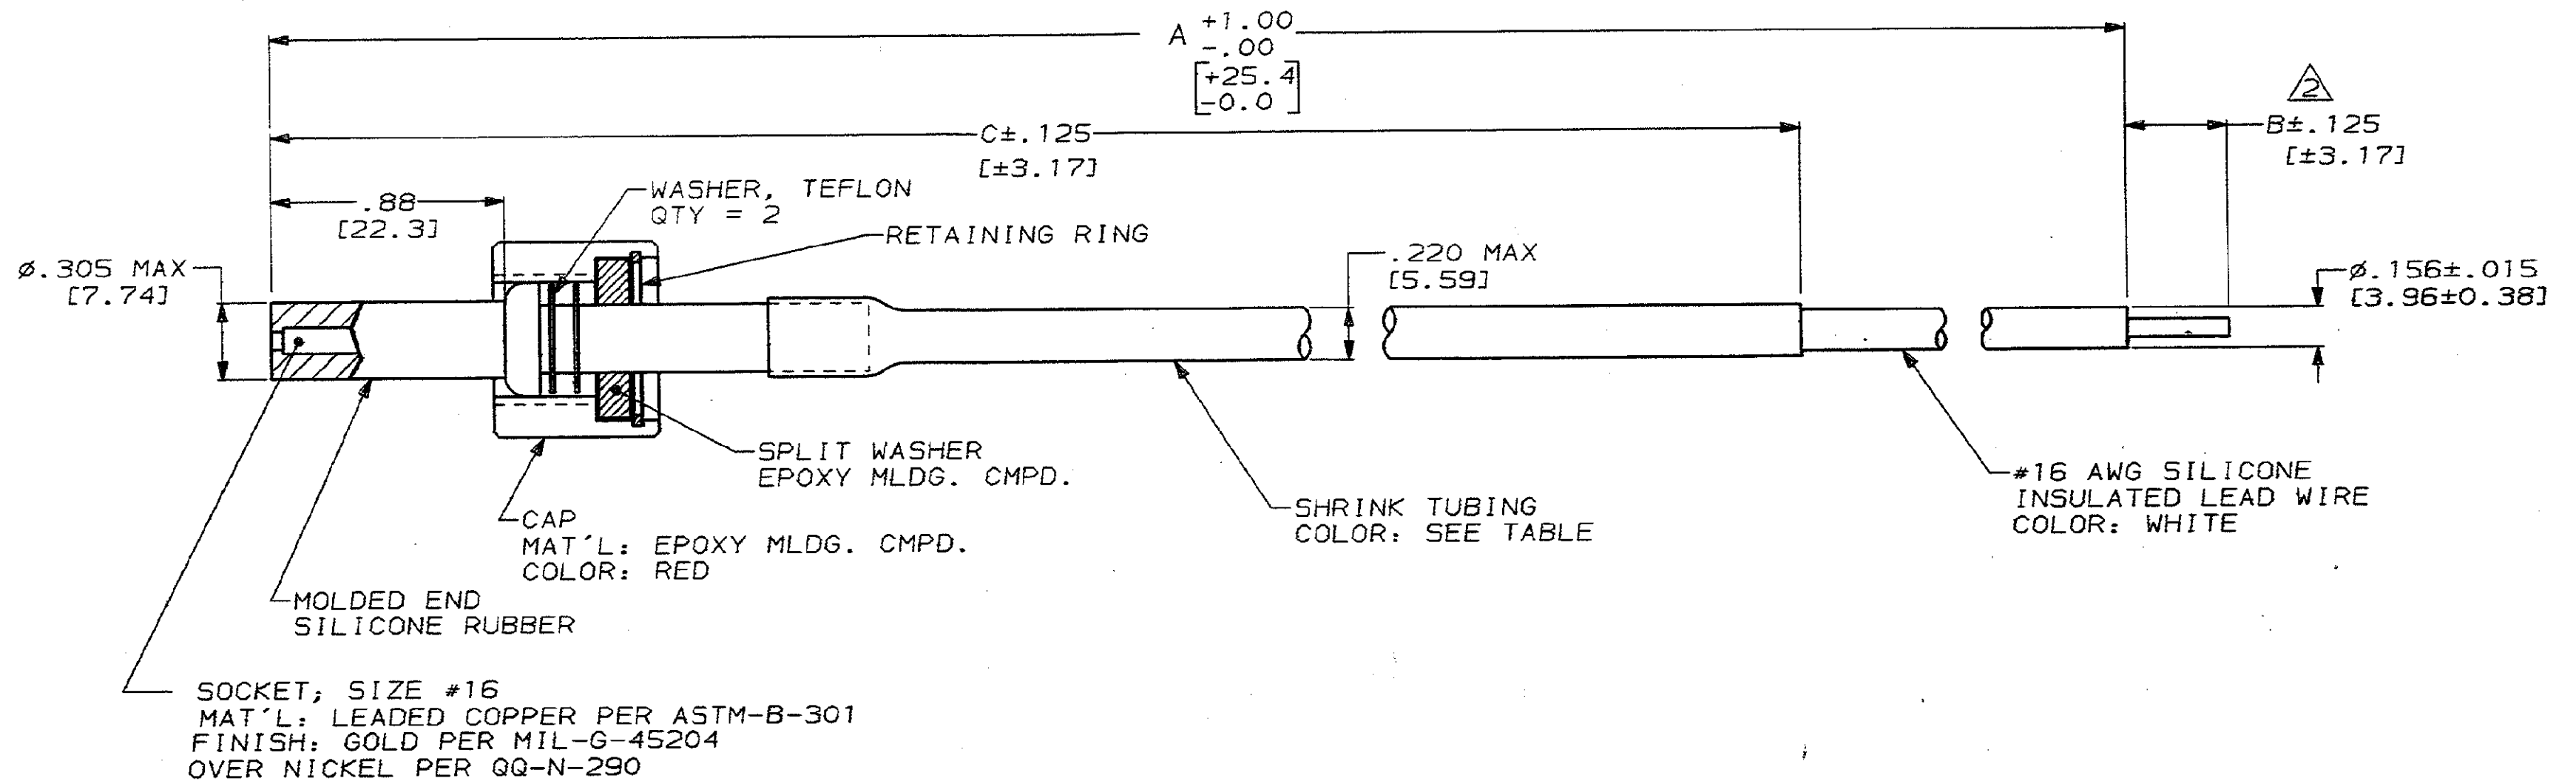

- MARKED PER MIL-STD-130.
- WHERE APPLICABLE PIGTAIL IS SOLDER DIPPED.
- TO MATE WITH AMP LGH-1 RECEPTACLE WITH .88 BARREL DEPTH.
- OPERATING VOLTAGE: 20 KVDC AT 0 TO 70,000 FEET, -55°C TO 125°C.

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN INCHES [mm] TOLERANCES ON: 2 PLC DEC = .02 [0.5] 3 PLC DEC = - ANGLES = -	DR 8-24-90 C.C. THOMAS	AMP INCORPORATED Harrisburg, Pa. 17105	
MATERIAL SEE CALLOUTS	CHK -	APPD <i>Raw Eaby</i> 8/24/90	NAME LEAD ASSEMBLY, SGL. END, COOLANOL RESISTANT WITH REDUCED INSULATION & REMOVABLE CAP, LGH-1
FINISH SEE CALLOUTS	APPD <i>Raw Eaby</i> 8/24/90	PRODUCT SPEC -	SIZE C
	APPLICATION SPEC -	WEIGHT -	CAGE CODE 00779
			DRAWING NO 859474
			SCALE 2:1
			SHEET 1 OF 1

CUSTOMER DRAWING

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)