
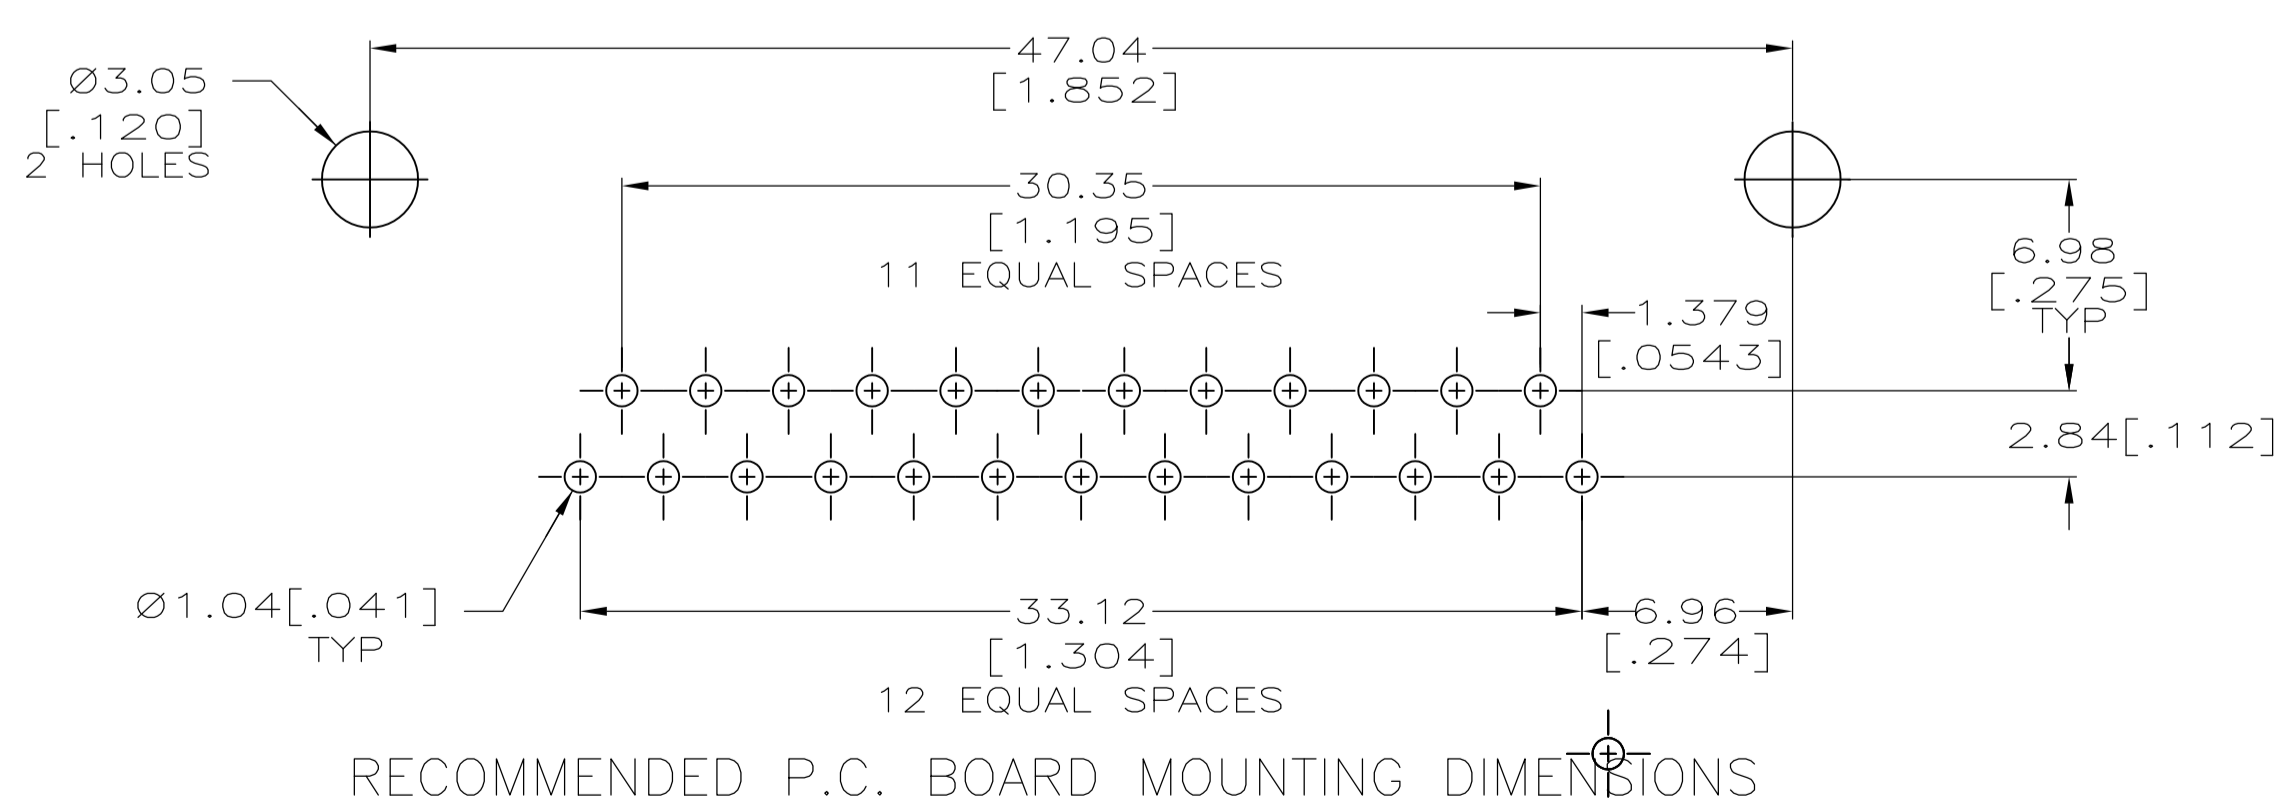
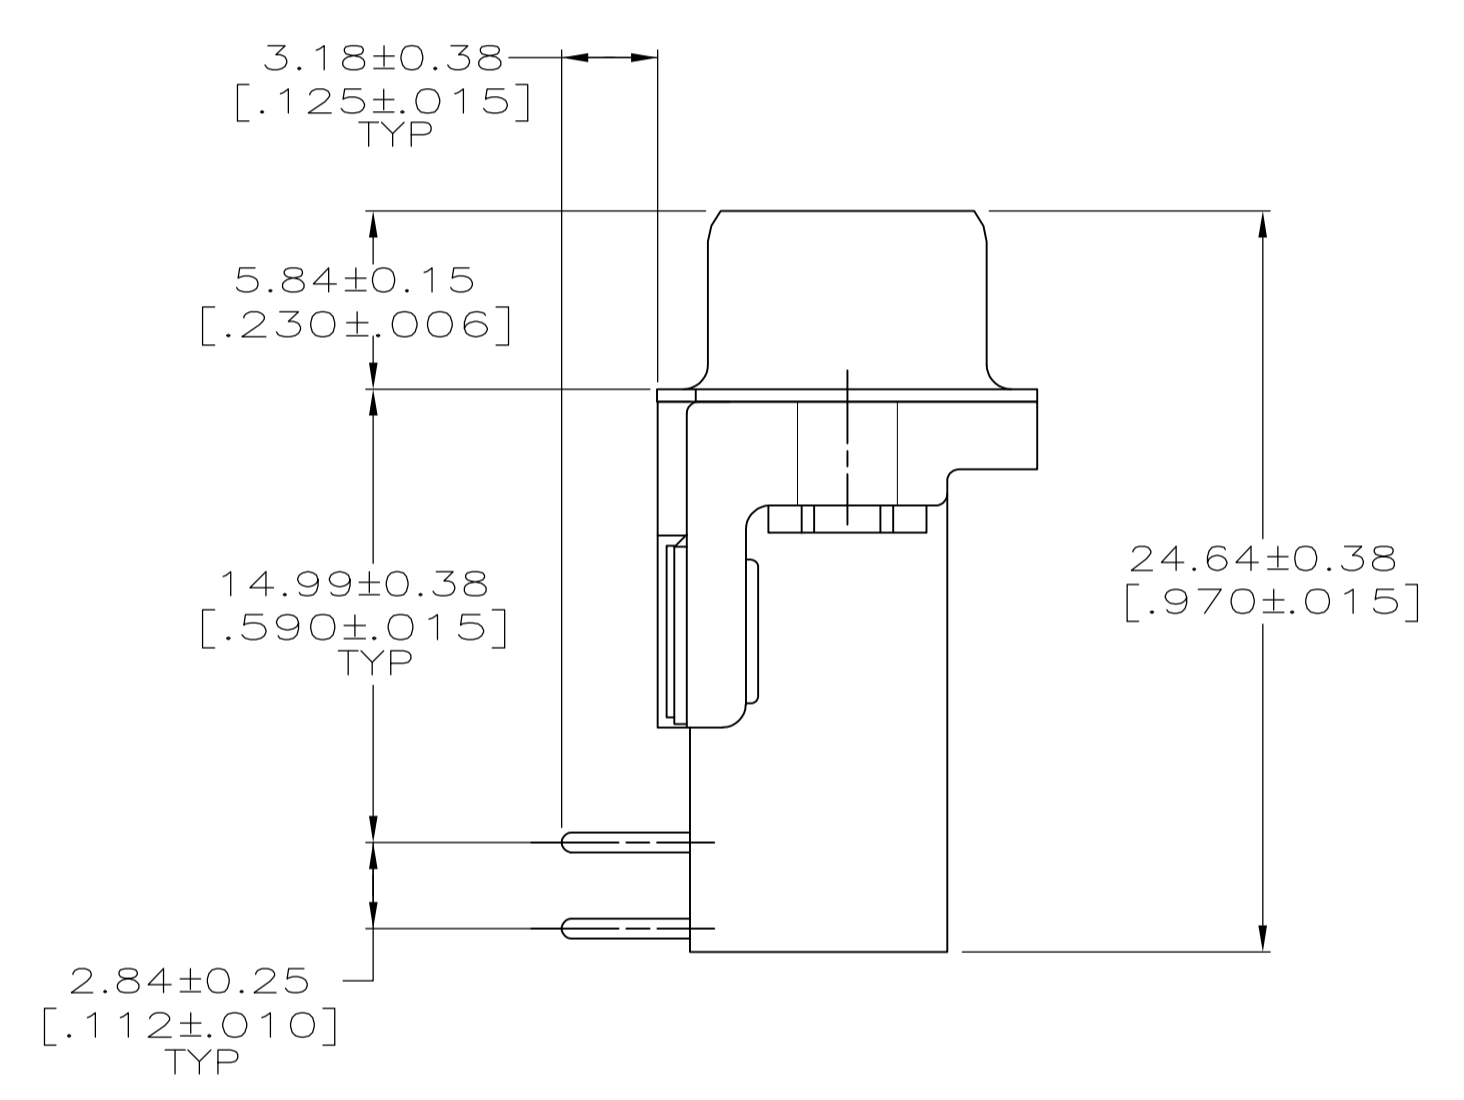


⚠ HOUSING: NYLON OR POLYESTER, FLAME RETARDANT, UL 94V-0 RATED, GLASS FILLED, BLACK.
 CONTACTS: BRASS
 SHELL: CARBON STEEL
 EYELETS: BRASS
 INSERTS: ZINC

⚠ SHELL: 2.54µm [.000100] MIN TIN OVER 1.27µm [.000050] MIN COPPER.
 EYELETS: 2.54µm [.000100] MIN TIN COPPER FLASH.
 INSERTS: CLEAR CHROMATE
 CONTACTS: 0.76µm (.000030) MIN GOLD PLATE ON THE MATING SURFACES, 2.54µm (.000100) MIN TIN PLATE ON THE SOLDER END, 1.27µm (.000050) MIN NICKEL UNDERPLATE ON THE ENTIRE CONTACT
 -OR-
 GOLD FLASH OVER PALLADIUM-NICKEL PLATE, 0.76µm (.000030) MIN TOTAL ON THE MATING SURFACES, 2.54µm (.000100) MIN TIN PLATE ON THE SOLDER END, 1.27µm (.000050) MIN NICKEL UNDERPLATE ON THE ENTIRE CONTACT.

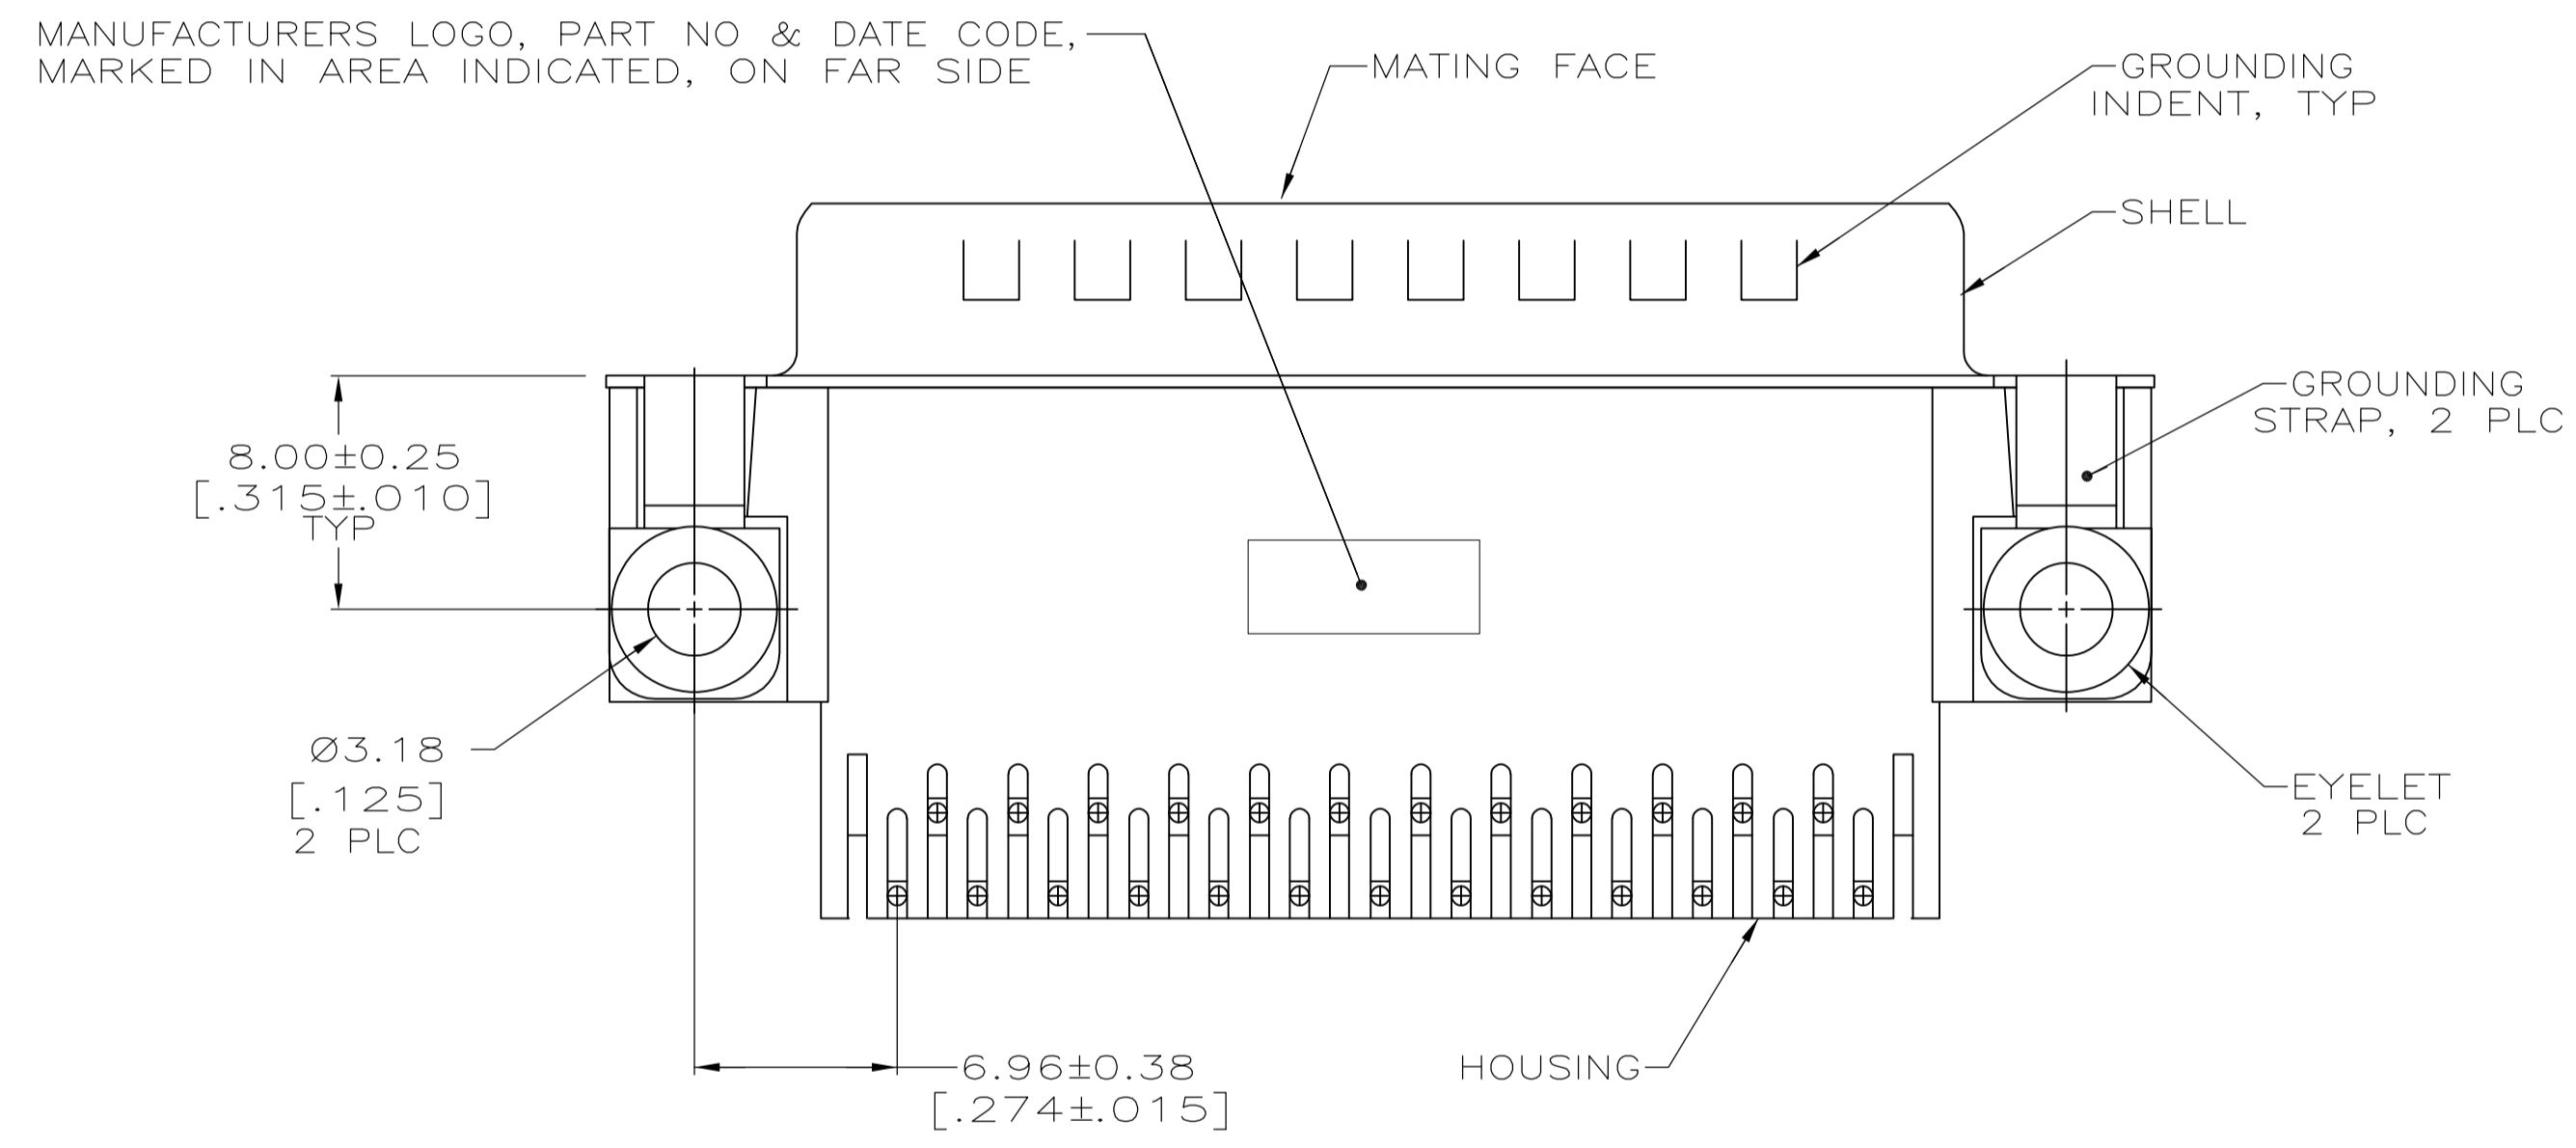

5745994-4
 PART NO

**COPYRIGHT 2005
 TYCO ELECTRONICS CORP
 ALL RIGHTS RESERVED**

| | | | | |
|--|--|--|--|-----------------|
| THIS DRAWING IS A CONTROLLED DOCUMENT. DIMENSIONING AND TOLERANCING PER ASME Y14.5M-2009 | | DIN A. FERNANDEZ-DOCKS 04-11-05 S. BOLASH 04-11-05 | STE TE Connectivity | |
| DIMENSIONS: mm [INCHES] | TOLERANCES UNLESS OTHERWISE SPECIFIED: | APVD M. WALMSLEY 04-11-05 | NAME PLUG ASSEMBLY, SIZE 3, 25 POSITION, RIGHT ANGLE, FRONT METAL SHELL, .590 SERIES, AMPLIMITE HD-20 | RESTRICTED TO |
| 0 PLC ± - | 1 PLC ± - | PRODUCT SPEC 108-40025 | SIZE 114-40010 | WEIGHT - |
| 2 PLC ± 0.13[.005] | 3 PLC ± - | APPLICATION SPEC | SCALE 4:1 | SHEET 1 OF 1 |
| 4 PLC ± - | ANGLES ± ° ' " | FINISH | CUSTOMER DRAWING | REV C |
| MATERIAL | | DRAWING NO 00779 | | REV C |
| FINISH | | C=5745994 | | |

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)