


Thermofit[®] Molded Parts
 Specification Control Drawing
 Limited Distribution

Part Number : 403A155-X-02
 Description : Cable Breakout, 1 to 3

NOTES

- All dimensions are in $\frac{\text{inches}}{\text{millimeters}}$
- Dimensions appearing in table are as follows:
 - a - As Supplied
 - b - After Unrestricted Recovery
- Coating is optional. As supplied dimensions appearing in table are for uncoated parts. When coating is added, entry diameters will be reduced by .06 max.

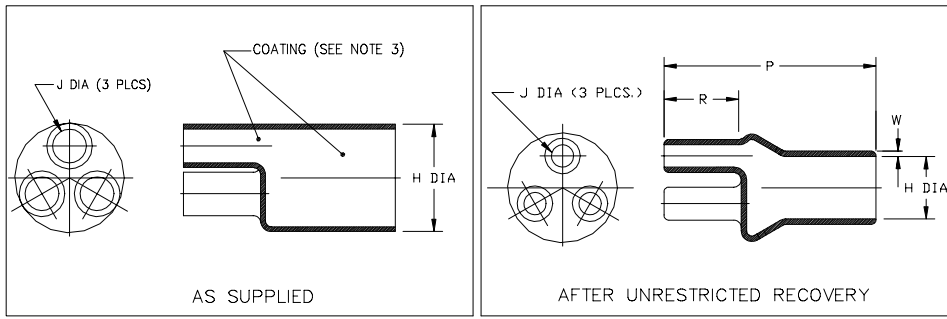

PART NUMBER	H		J		P ±10%	R Min b	W ±20% b
	Min a	Max b	Min a	Max b			
403A155-X-02	$\frac{2.76}{[70,1]}$	$\frac{1.40}{[35,5]}$	$\frac{1.80}{[45,7]}$	$\frac{.50}{[12,7]}$	$\frac{4.75}{[120,6]}$	$\frac{1.50}{[38,1]}$	$\frac{.12}{[3,0]}$

**If this document is printed it becomes uncontrolled.
 Check for the latest revision.**

Raychem

RAYCHEM CORPORATION
 300 CONSTITUTION DRIVE
 MENLO PARK, CALIFORNIA 94025

Revision : C
 Date : 8/14/96


Part Number : 403A155-X-02
 Description : Cable Breakout, 1 to 3

Thermofit[®] Molded Parts
 Specification Control Drawing
 Limited Distribution

Part Number : 403A155-X-02
 Description : Cable Breakout, 1 to 3

MATERIAL DASH NO.	MATERIAL DESCRIPTION	RT SPEC	COATING SLASH NO.	COATING S NO.	COATING DESCRIPTION
-3	Polyolefin, Semi-rigid	RT-301	/42;/86	S-1017;S-1048	Adhesive
-4	Polyolefin, Flexible	RT-1304	/42;/86	S-1017;S-1048	Adhesive
-25	Elastomer, Fluid Resistant	RT-1325	/86	S-1048	Adhesive

ORDERING INFORMATION

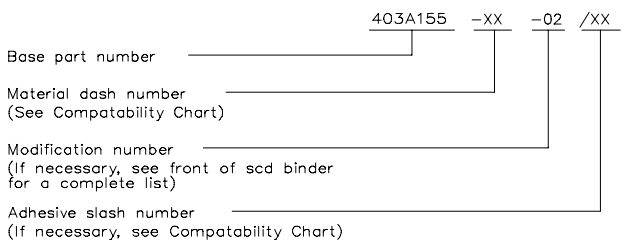

THIS DRAWING IS SUBJECT TO CHANGE WITHOUT NOTICE; CONSULT YOUR
 NEAREST FIELD REPRESENTATIVE FOR CURRENT REVISION

Raychem

RAYCHEM CORPORATION
 300 CONSTITUTION DRIVE
 MENLO PARK, CALIFORNIA 94025

Revision : C
 Date : 8/14/96

Part Number : 403A155-X-02
 Description : Cable Breakout, 1 to 3

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)