
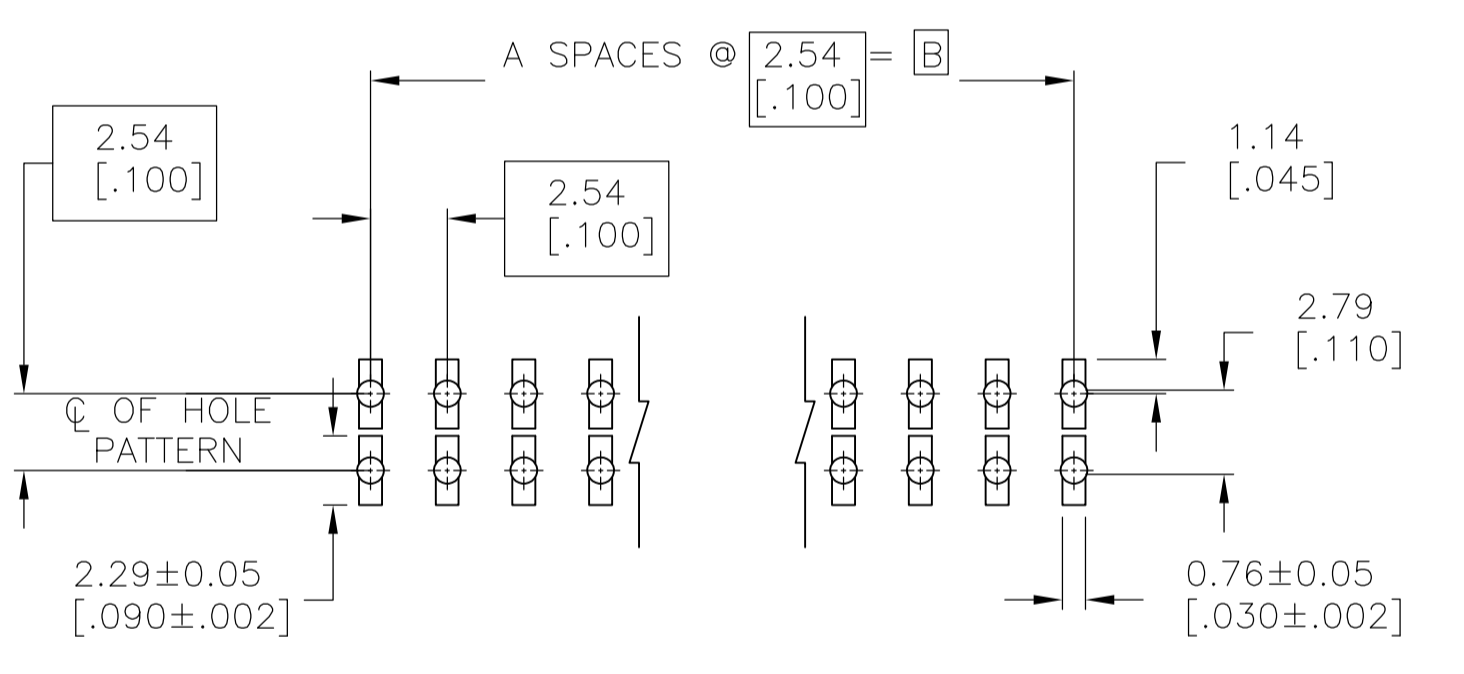


| REVISIONS |     |                           |           |     |      |
|-----------|-----|---------------------------|-----------|-----|------|
| P         | LTR | DESCRIPTION               | DATE      | DMN | APVO |
| C         |     | REVISED PER ECO-14-000260 | 07JUL2014 | NK  | MM   |
| D         |     | REVISED PER ECO-17-003710 | 18MAR2017 | RS  | MM   |

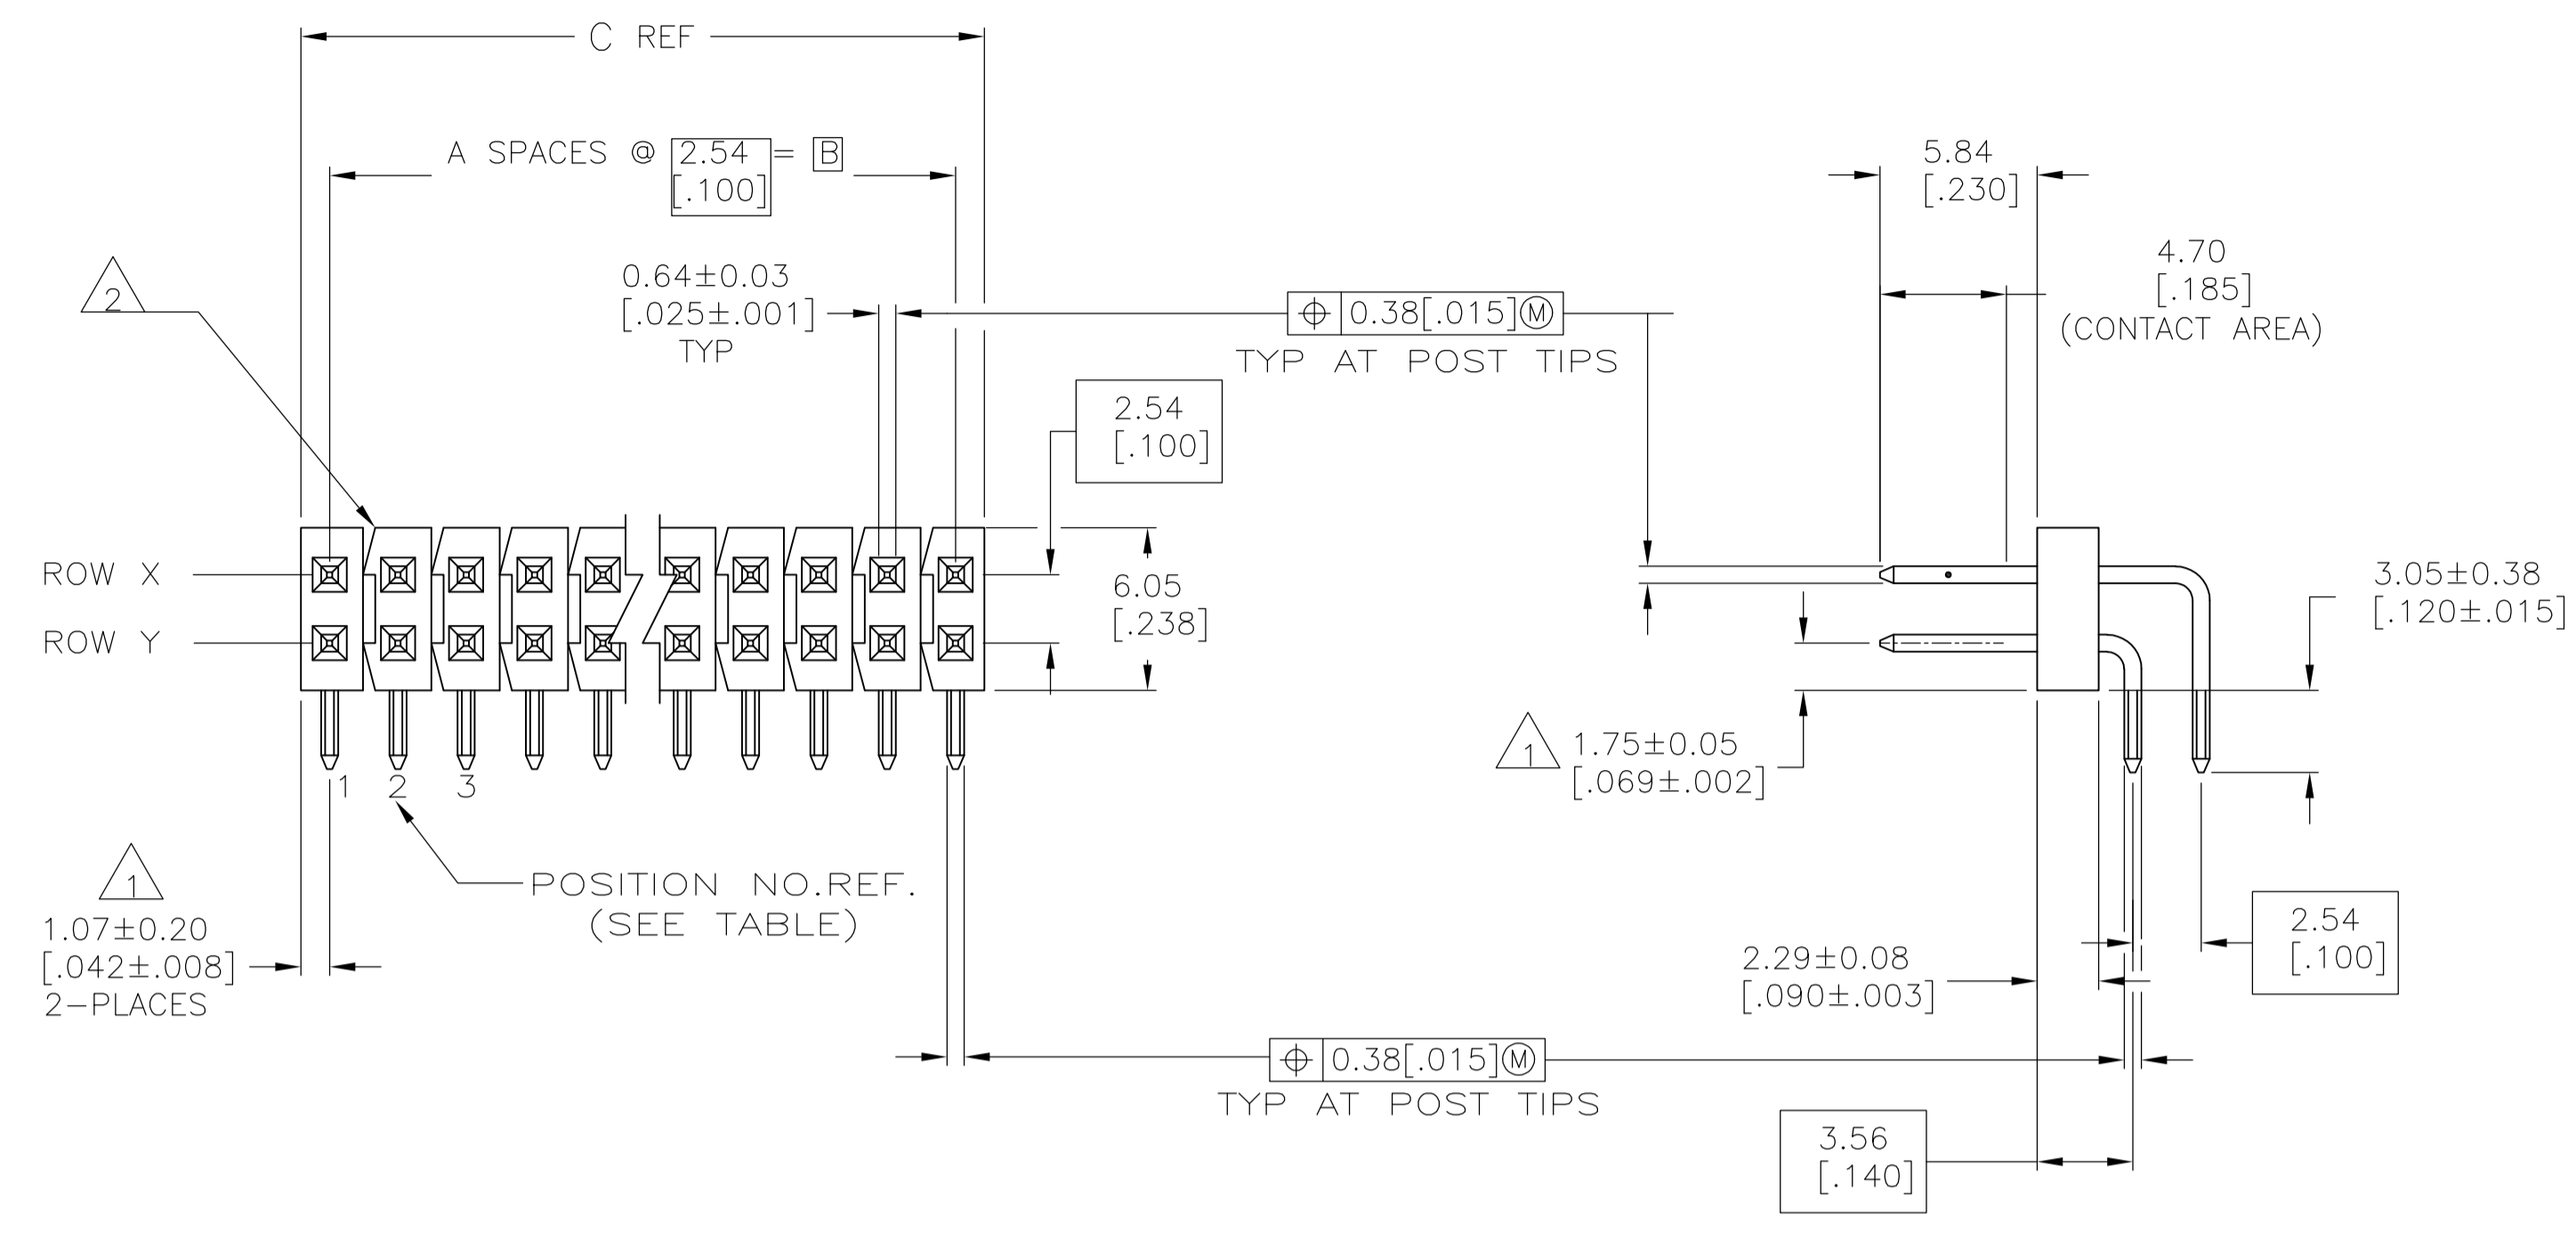

RECOMMENDED PC BOARD MOUNTING DIMENSIONS FOR .063 [1.60] THICK PC BOARD AND .012 [.305] STENCIL THICK.

- 1 THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING.
- 2 BREAKAWAY NOTCH ANGLE CAN BE ORIENTED TO THE RIGHT ( AS SHOWN ) OR TO THE LEFT
- 3 GLASS FILLED THERMOPLASTIC (THAT WILL WITHSTAND IR REFLOW PROCESSING) COLOR: BLACK, POST: COPPER ALLOY.
- 4 0.000762 [.000030] GOLD ON CONTACT AREA, 0.00254-0.00508 [.000100-.000200] MATTE TIN-LEAD ALL OVER 0.00127 [.000050] NICKEL.
- 5 PARTS PACKAGED IN TUBES.
- 6 0.000762 [.000030] GOLD ON CONTACT AREA, 0.00254-0.00508 [.000100-.000200] MATTE TIN ALL OVER 0.00127 [.000050] NICKEL.
- 7 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

| OBSOLETE | 6 | 101.19<br>[3.984] | 99.06<br>[3.900] | 39 | 80 | 9-146308-0 | 7 | 4 | 75.79<br>[2.984] | 73.66<br>[2.900] | 29 | 60 | 4-146308-1 |
|----------|---|-------------------|------------------|----|----|------------|---|---|------------------|------------------|----|----|------------|
|          |   |                   |                  |    |    |            |   |   |                  |                  |    |    |            |
| OBSOLETE | 6 | 98.65 [3.884]     | 96.52 [3.800]    | 38 | 78 | 8-146308-9 | 7 | 4 | 101.19 [3.984]   | 99.06 [3.900]    | 39 | 80 | 4-146308-0 |
| OBSOLETE | 6 | 96.11 [3.784]     | 93.98 [3.700]    | 37 | 76 | 8-146308-8 | 7 | 4 | 98.65 [3.884]    | 96.52 [3.800]    | 38 | 78 | 3-146308-9 |
| OBSOLETE | 6 | 93.57 [3.684]     | 91.44 [3.600]    | 36 | 74 | 8-146308-7 | 7 | 4 | 96.11 [3.784]    | 93.98 [3.700]    | 37 | 76 | 3-146308-8 |
| OBSOLETE | 6 | 91.03 [3.584]     | 88.90 [3.500]    | 35 | 72 | 8-146308-6 | 7 | 4 | 93.57 [3.684]    | 91.44 [3.600]    | 36 | 74 | 3-146308-7 |
| OBSOLETE | 6 | 88.49 [3.484]     | 86.36 [3.400]    | 34 | 70 | 8-146308-5 | 7 | 4 | 91.03 [3.584]    | 88.90 [3.500]    | 35 | 72 | 3-146308-6 |
| OBSOLETE | 6 | 85.95 [3.384]     | 83.82 [3.300]    | 33 | 68 | 8-146308-4 | 7 | 4 | 88.49 [3.484]    | 86.36 [3.400]    | 34 | 70 | 3-146308-5 |
| OBSOLETE | 6 | 83.41 [3.284]     | 81.28 [3.200]    | 32 | 66 | 8-146308-3 | 7 | 4 | 85.95 [3.384]    | 83.82 [3.300]    | 33 | 68 | 3-146308-4 |
| OBSOLETE | 6 | 80.87 [3.184]     | 78.74 [3.100]    | 31 | 64 | 8-146308-2 | 7 | 4 | 83.41 [3.284]    | 81.28 [3.200]    | 32 | 66 | 3-146308-3 |
| OBSOLETE | 6 | 78.33 [3.084]     | 76.20 [3.000]    | 30 | 62 | 8-146308-1 | 7 | 4 | 80.87 [3.184]    | 78.74 [3.100]    | 31 | 64 | 3-146308-2 |
| OBSOLETE | 6 | 75.79 [2.984]     | 73.66 [2.900]    | 29 | 60 | 8-146308-0 | 7 | 4 | 78.33 [3.084]    | 76.20 [3.000]    | 30 | 62 | 3-146308-1 |
| OBSOLETE | 6 | 73.25 [2.884]     | 71.12 [2.800]    | 28 | 58 | 7-146308-9 | 7 | 4 | 75.79 [2.984]    | 73.66 [2.900]    | 29 | 60 | 3-146308-0 |
| OBSOLETE | 6 | 70.71 [2.784]     | 68.58 [2.700]    | 27 | 56 | 7-146308-8 | 7 | 4 | 73.25 [2.884]    | 71.12 [2.800]    | 28 | 58 | 2-146308-9 |
| OBSOLETE | 6 | 68.17 [2.684]     | 66.04 [2.600]    | 26 | 54 | 7-146308-7 | 7 | 4 | 70.71 [2.784]    | 68.58 [2.700]    | 27 | 56 | 2-146308-8 |
| OBSOLETE | 6 | 65.63 [2.584]     | 63.5 [2.500]     | 25 | 52 | 7-146308-6 | 7 | 4 | 68.17 [2.684]    | 66.04 [2.600]    | 26 | 54 | 2-146308-7 |
| OBSOLETE | 6 | 63.09 [2.484]     | 60.96 [2.400]    | 24 | 50 | 7-146308-5 | 7 | 4 | 65.63 [2.584]    | 63.5 [2.500]     | 25 | 52 | 2-146308-6 |
| OBSOLETE | 6 | 60.55 [2.384]     | 58.42 [2.300]    | 23 | 48 | 7-146308-4 | 7 | 4 | 63.09 [2.484]    | 60.96 [2.400]    | 24 | 50 | 2-146308-5 |
| OBSOLETE | 6 | 58.01 [2.284]     | 55.88 [2.200]    | 22 | 46 | 7-146308-3 | 7 | 4 | 60.55 [2.384]    | 58.42 [2.300]    | 23 | 48 | 2-146308-4 |
| OBSOLETE | 6 | 55.47 [2.184]     | 53.34 [2.100]    | 21 | 44 | 7-146308-2 | 7 | 4 | 58.01 [2.284]    | 55.88 [2.200]    | 22 | 46 | 2-146308-3 |
| OBSOLETE | 6 | 52.93 [2.084]     | 50.80 [2.000]    | 20 | 42 | 7-146308-1 | 7 | 4 | 55.47 [2.184]    | 53.34 [2.100]    | 21 | 44 | 2-146308-2 |
| OBSOLETE | 6 | 50.39 [1.984]     | 48.26 [1.900]    | 19 | 40 | 7-146308-0 | 7 | 4 | 52.93 [2.084]    | 50.80 [2.000]    | 20 | 42 | 2-146308-1 |
| OBSOLETE | 6 | 47.85 [1.884]     | 45.72 [1.800]    | 18 | 38 | 6-146308-9 | 7 | 4 | 50.39 [1.984]    | 48.26 [1.900]    | 19 | 40 | 2-146308-0 |
| OBSOLETE | 6 | 45.31 [1.784]     | 43.18 [1.700]    | 17 | 36 | 6-146308-8 | 7 | 4 | 47.85 [1.884]    | 45.72 [1.800]    | 18 | 38 | 1-146308-9 |
| OBSOLETE | 6 | 42.77 [1.684]     | 40.64 [1.600]    | 16 | 34 | 6-146308-7 | 7 | 4 | 45.31 [1.784]    | 43.18 [1.700]    | 17 | 36 | 1-146308-8 |
| OBSOLETE | 6 | 40.23 [1.584]     | 38.10 [1.500]    | 15 | 32 | 6-146308-6 | 7 | 4 | 42.77 [1.684]    | 40.64 [1.600]    | 16 | 34 | 1-146308-7 |
| OBSOLETE | 6 | 37.69 [1.484]     | 35.56 [1.400]    | 14 | 30 | 6-146308-5 | 7 | 4 | 40.23 [1.584]    | 38.10 [1.500]    | 15 | 32 | 1-146308-6 |
| OBSOLETE | 6 | 35.15 [1.384]     | 33.02 [1.300]    | 13 | 28 | 6-146308-4 | 7 | 4 | 37.69 [1.484]    | 35.56 [1.400]    | 14 | 30 | 1-146308-5 |
| OBSOLETE | 6 | 32.61 [1.284]     | 30.48 [1.200]    | 12 | 26 | 6-146308-3 | 7 | 4 | 35.15 [1.384]    | 33.02 [1.300]    | 13 | 28 | 1-146308-4 |
| OBSOLETE | 6 | 30.07 [1.184]     | 27.94 [1.100]    | 11 | 24 | 6-146308-2 | 7 | 4 | 32.61 [1.284]    | 30.48 [1.200]    | 12 | 26 | 1-146308-3 |
| OBSOLETE | 6 | 27.53 [1.084]     | 25.40 [1.000]    | 10 | 22 | 6-146308-1 | 7 | 4 | 30.07 [1.184]    | 27.94 [1.100]    | 11 | 24 | 1-146308-2 |
| OBSOLETE | 6 | 24.99 [.984]      | 22.86 [.900]     | 9  | 20 | 6-146308-0 | 7 | 4 | 27.53 [1.084]    | 25.40 [1.000]    | 10 | 22 | 1-146308-1 |
| OBSOLETE | 6 | 22.45 [.884]      | 20.32 [.800]     | 8  | 18 | 5-146308-9 | 7 | 4 | 24.99 [.984]     | 22.86 [.900]     | 9  | 20 | 1-146308-0 |
| OBSOLETE | 6 | 19.91 [.784]      | 17.78 [.700]     | 7  | 16 | 5-146308-8 | 7 | 4 | 22.45 [.884]     | 20.32 [.800]     | 8  | 18 | 1-146308-9 |
| OBSOLETE | 6 | 17.37 [.684]      | 15.24 [.600]     | 6  | 14 | 5-146308-7 | 7 | 4 | 19.91 [.784]     | 17.78 [.700]     | 7  | 16 | 1-146308-8 |
| OBSOLETE | 6 | 14.83 [.584]      | 12.70 [.500]     | 5  | 12 | 5-146308-6 | 7 | 4 | 17.37 [.684]     | 15.24 [.600]     | 6  | 14 | 1-146308-7 |
| OBSOLETE | 6 | 12.29 [.484]      | 10.16 [.400]     | 4  | 10 | 5-146308-5 | 7 | 4 | 14.83 [.584]     | 12.70 [.500]     | 5  | 12 | 146308-6   |
| OBSOLETE | 6 | 9.75 [.384]       | 7.62 [.300]      | 3  | 8  | 5-146308-4 | 7 | 4 | 12.29 [.484]     | 10.16 [.400]     | 4  | 10 | 1-146308-5 |
| OBSOLETE | 6 | 7.21 [.284]       | 5.08 [.200]      | 2  | 6  | 5-146308-3 | 7 | 4 | 9.75 [.384]      | 7.62 [.300]      | 3  | 8  | 1-146308-4 |
| OBSOLETE | 6 | 4.67 [.184]       | 2.54 [.100]      | 1  | 4  | 5-146308-2 | 7 | 4 | 7.21 [.284]      | 5.08 [.200]      | 2  | 6  | 1-146308-3 |
| OBSOLETE | 6 | -                 | -                | 0  | 2  | 5-146308-1 | 7 | 4 | 4.67 [.184]      | 2.54 [.100]      | 1  | 4  | 1-146308-2 |
|          |   | -                 | -                | 0  | 2  | 5-146308-1 | 4 |   | -                | -                | 0  | 2  | 146308-1   |

THIS DRAWING IS A CONTROLLED DOCUMENT. DIMENSIONS: mm [INCHES]. TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± .01, 1 PLC ± .015, 2 PLC ± .02, 3 PLC ± .025, 4 PLC ± .03. MATERIAL: SEE TABLE. FINISH: SEE TABLE. WEIGHT: -. SIZE: A1. CUSTOMER DRAWING. SCALE: 4:1. SHEET 1 OF 1. REV D.

STE TE Connectivity. HDR ASSY,MODII,BRKAWAY, RT ANG,DBLE ROW,HIGH TEMP, .100X.100 C/L,W/.025 SQRE PTS. 00779-146308

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)