

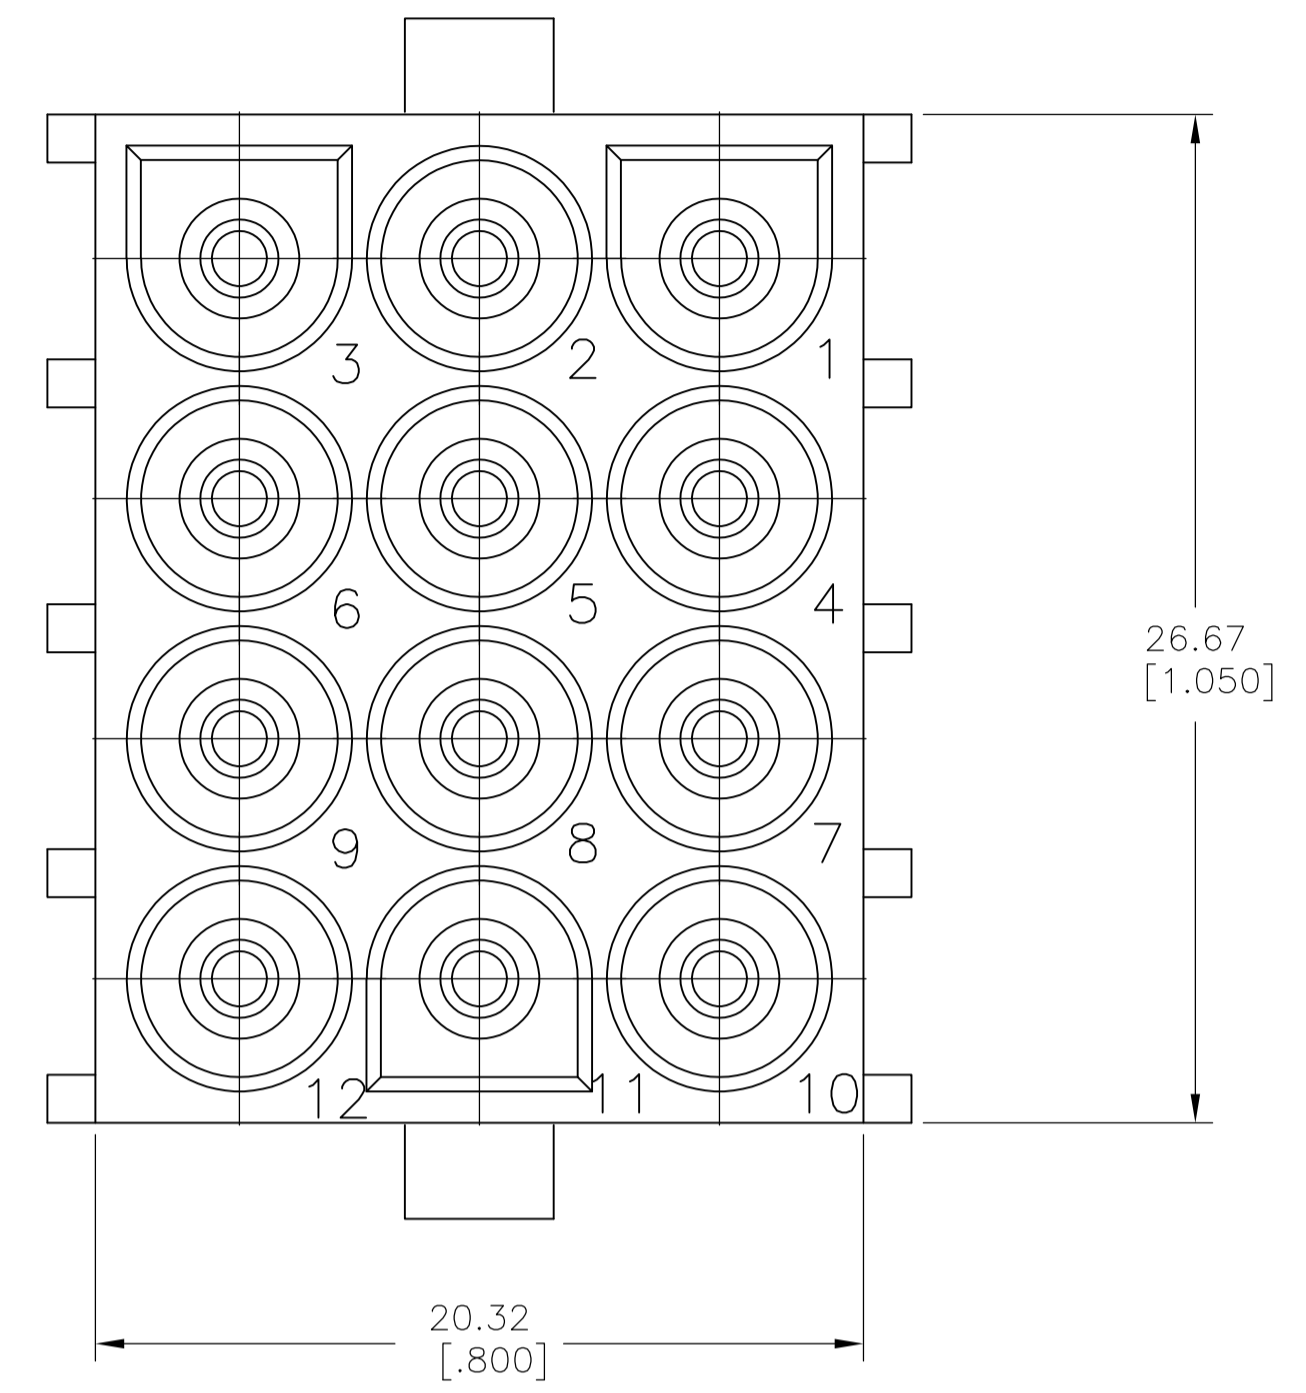


LOC		DIST		REVISIONS			
CM	00	REV	DATE	BY	CHK	APPV	
G1		REVISED PER ECO-08-019746	13AUG08	HMR		DC	
G2		REV PER ECO-09-021826	08SEP09	KK		AEG	

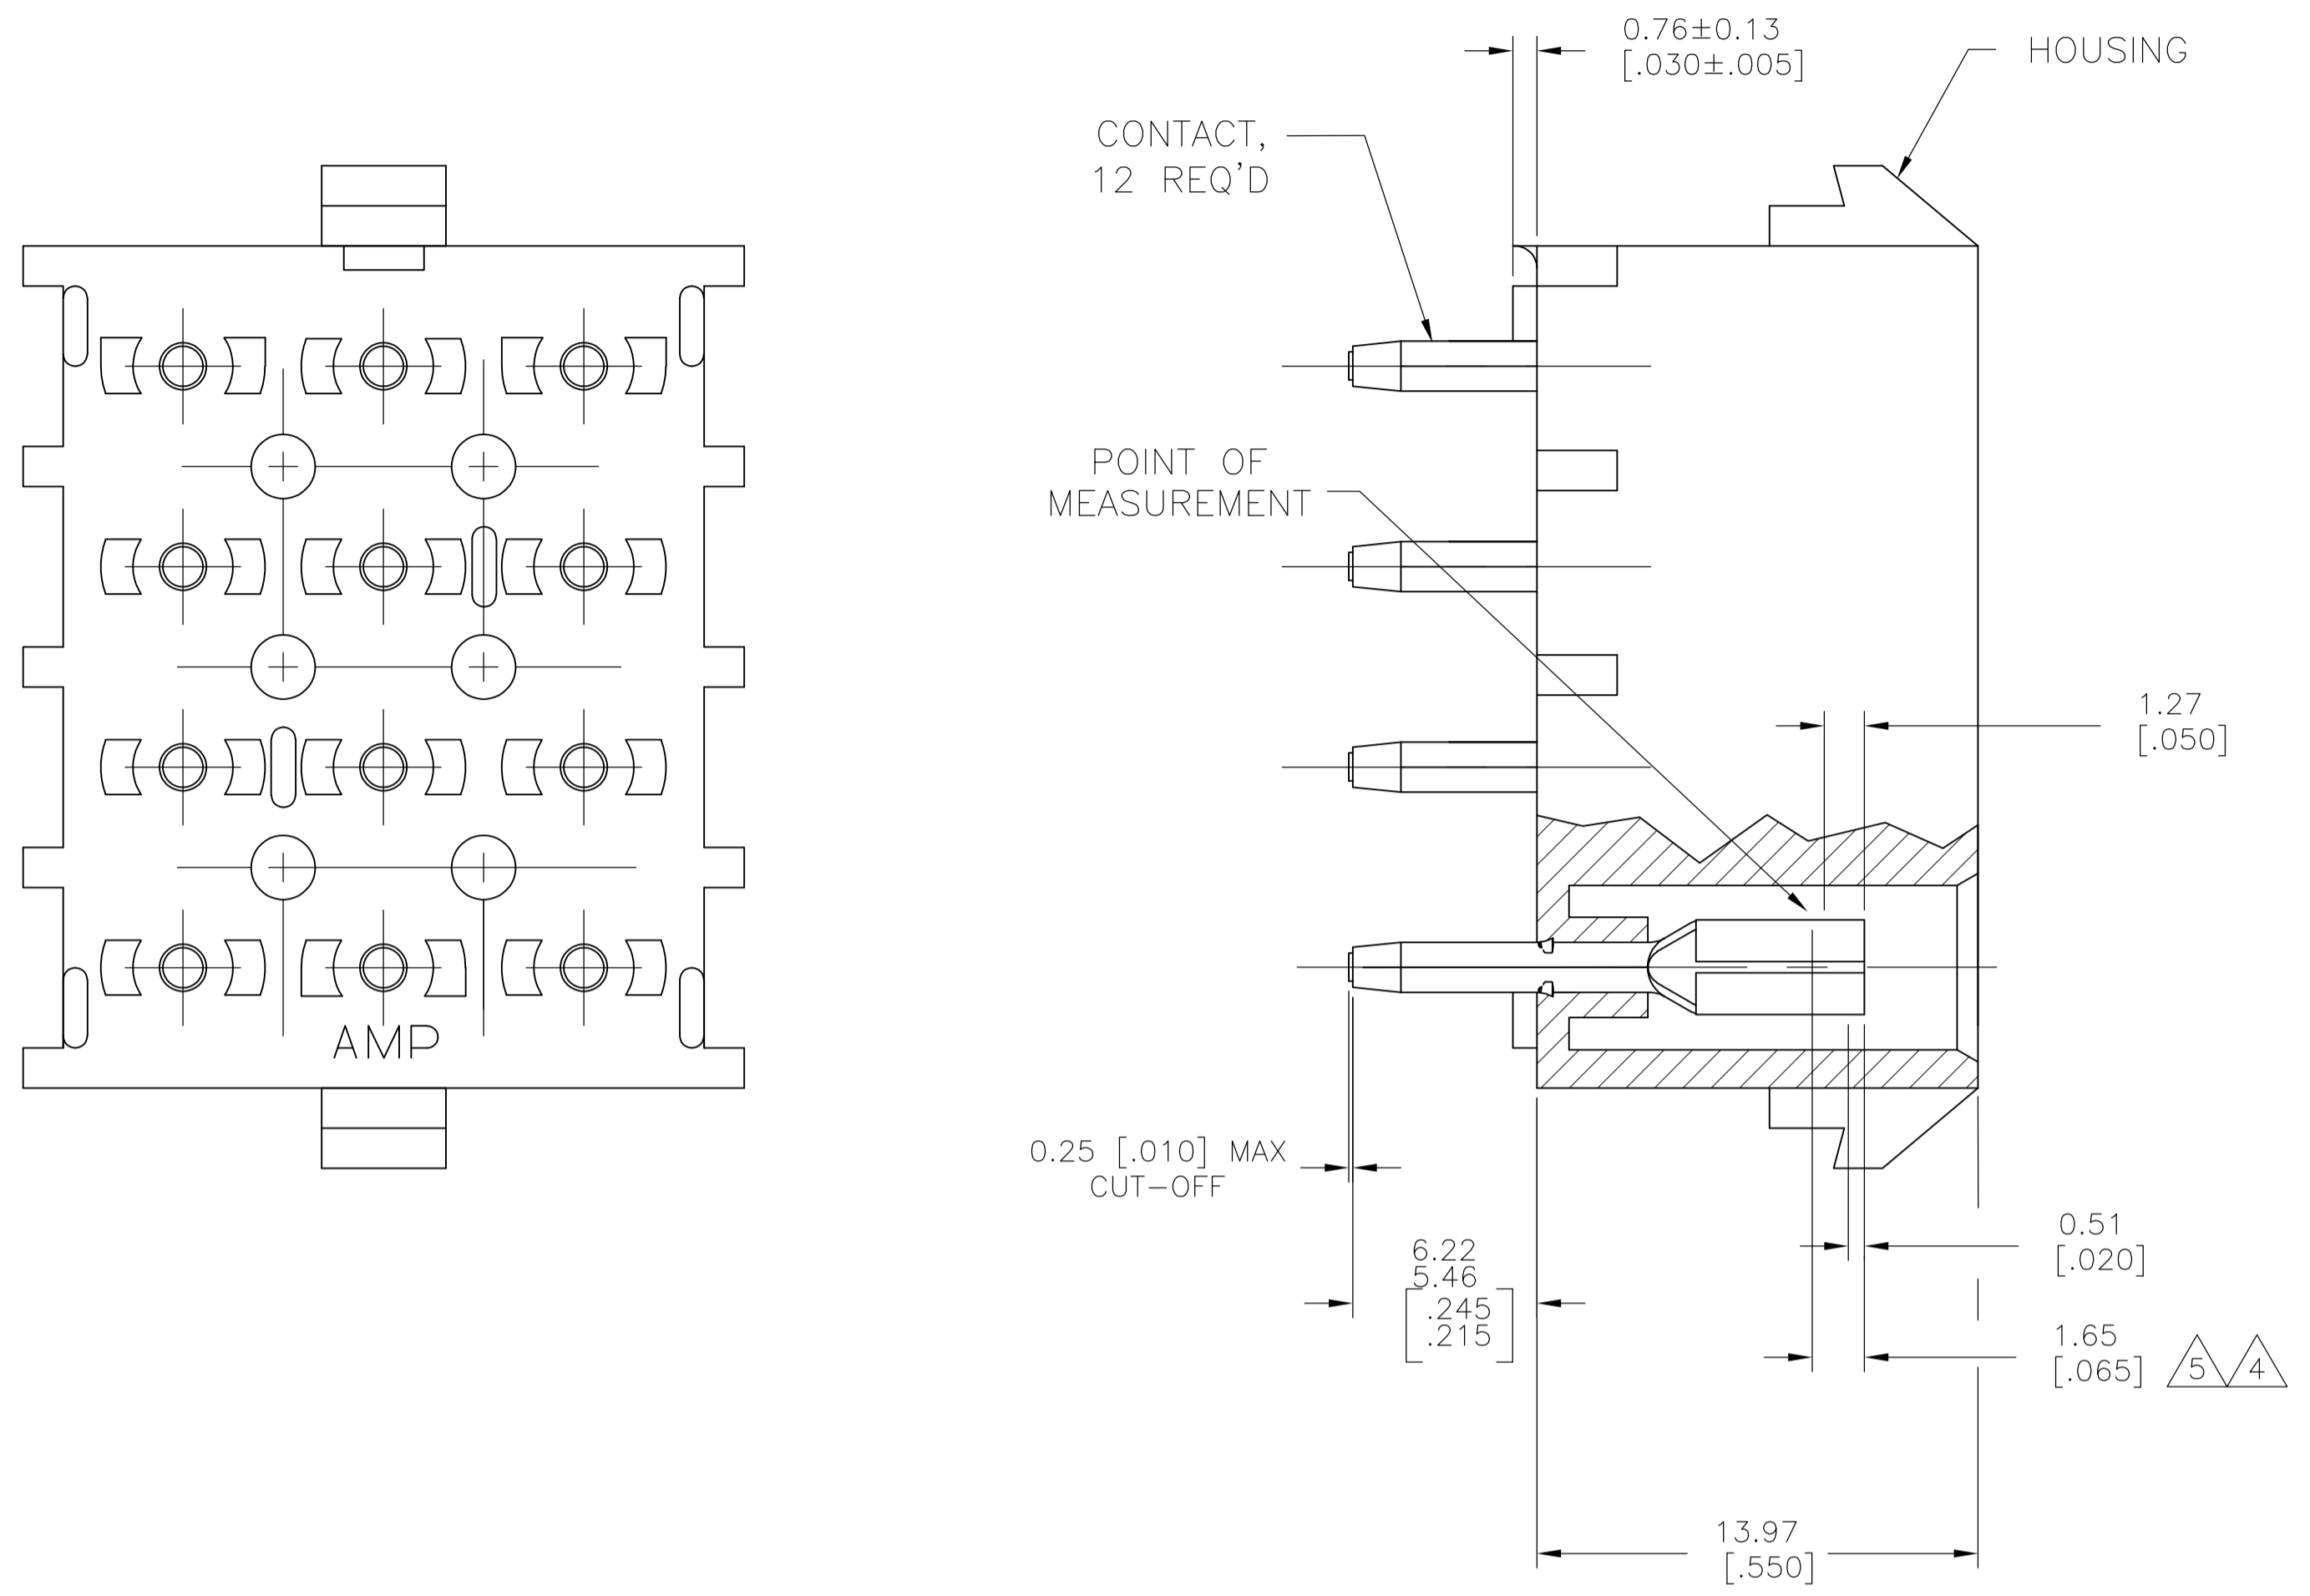

- 1 MATES WITH AMP CONNECTOR PART NO. 480708.
- $\triangle 2$ FLAME RETARDANT CLASSIFICATION OF MATERIAL IS 94V-2.
- 3 PARTS MUST COMPLY WITH AMP SOLDERABILITY SPEC 109-11-3.
- $\triangle 4$ CONTACT IS STAMPED FROM PRE-PLATED STOCK WHICH IS PLATED OVERALL WITH 0.00127 [.000050] NICKEL, THEN STRIPED WITH 0.00076 [.000030] GOLD IN CONTACT AREA INDICATED AND TIN-LEAD ON SOLDER TAIL END.
- $\triangle 5$ CONTACT IS PLATED OVERALL WITH 0.00127 [.000050] NICKEL, THEN 0.00076 [.000030] GOLD OVER CONTACT LENGTH INDICATED AND MATTE TIN ON SOLDER TAIL END.
- $\triangle 6$ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

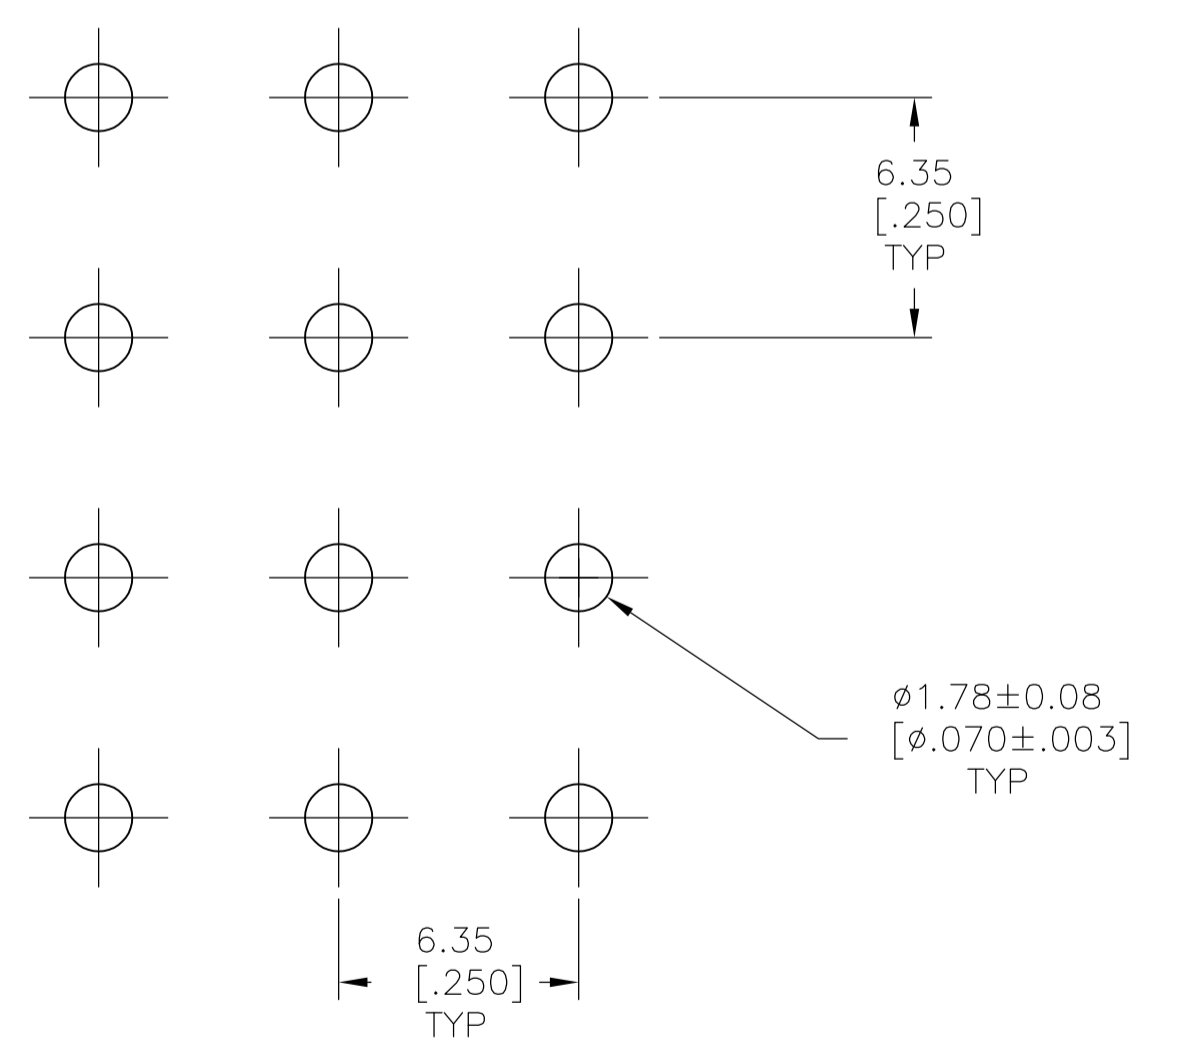

RECOMMENDED LAYOUT FOR 3.18 [.125] THICK PC BOARD

$\triangle 6$	SUPERSEDED BY 350991-5	PH BRZ GOLD $\triangle 5$	NYLON,NATURAL $\triangle 2$	350991-5
		PH BRZ TIN	NYLON,NATURAL $\triangle 2$	350991-4
		PH BRZ GOLD $\triangle 4$	NYLON,NATURAL $\triangle 2$	350991-3
		CONTACT	HOUSING	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWG K. WHITAKER 11OCT2005	Tyco Electronics Corporation Harrisburg, PA 17105-3608
DIMENSIONS: mm [INCHES]		CHK S. RIDGILL 11OCT2005	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPV S. RIDGILL 11OCT2005	NAME
0. PLC ±		PRODUCT SPEC	SOCKET HEADER ASSEMBLY, 12 CIRCUIT, LONG TAIL, UNIVERSAL MATE-N-LOK (TM)
1. PLC ±		APPLICATION SPEC	SIZE
2. PLC ±		WEIGHT	CAGE CODE
3. PLC ±	0.13 [.005]	CUSTOMER DRAWING	DRAWING NO
4. PLC ±		SCALE	RESTRICTED TO
ANGLES ±		5:1	
FINISH	SEE TABLE	SHEET	
		1 OF 1	
		REV	
		G2	

METRIC

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)